



版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181112

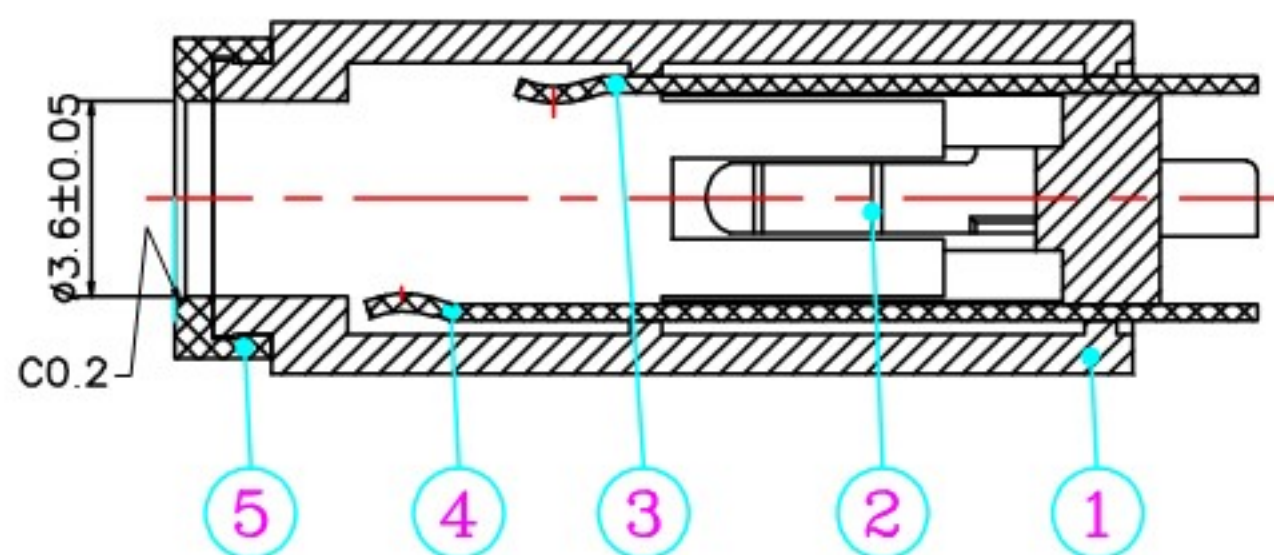

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c>Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3—3kgf.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx:±0.3	6								
视图 Third angle projection		xx:±0.1	5	盖子	BRASS(C3604)	Ni 2-5um	June	杨义邦	李莹峰	规格 DESCRIPTION:	3.5 AUDIO JACK Ø3.5*Ø6.0*19.5
			4	三极片	BRONZE(C5191)	Ni 2-5um				品名 P/N:	J353SJ59G封闭式
			3	二极片	BRONZE(C5191)	Ni 2-5um				图号 DRAWN NO:	CP-06-0022
		xx:±0.05	2	一极片	BRONZE(C5191)	Ni 2-5um					
			1	PLASTIC	POM	BLACK					
			NO.	PART	MATERIAL	PLATING					

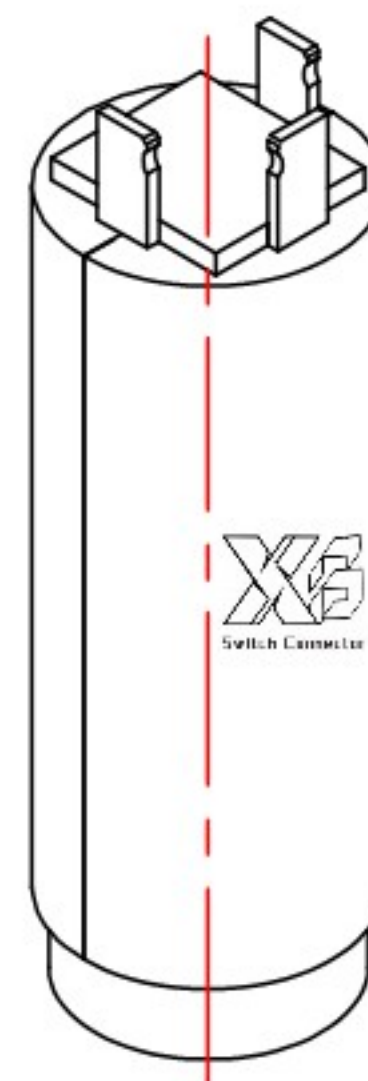

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

規格 DESCRIPTION:	3.5 AUDIO JACK $\phi 3.5 * \phi 6.0 * 19.5$
-----------------	---

品 名	P/N:	J353SJ59G封闭式
-----	------	--------------

图号	DRAWN NO:	CP-06-0022
----	-----------	------------