
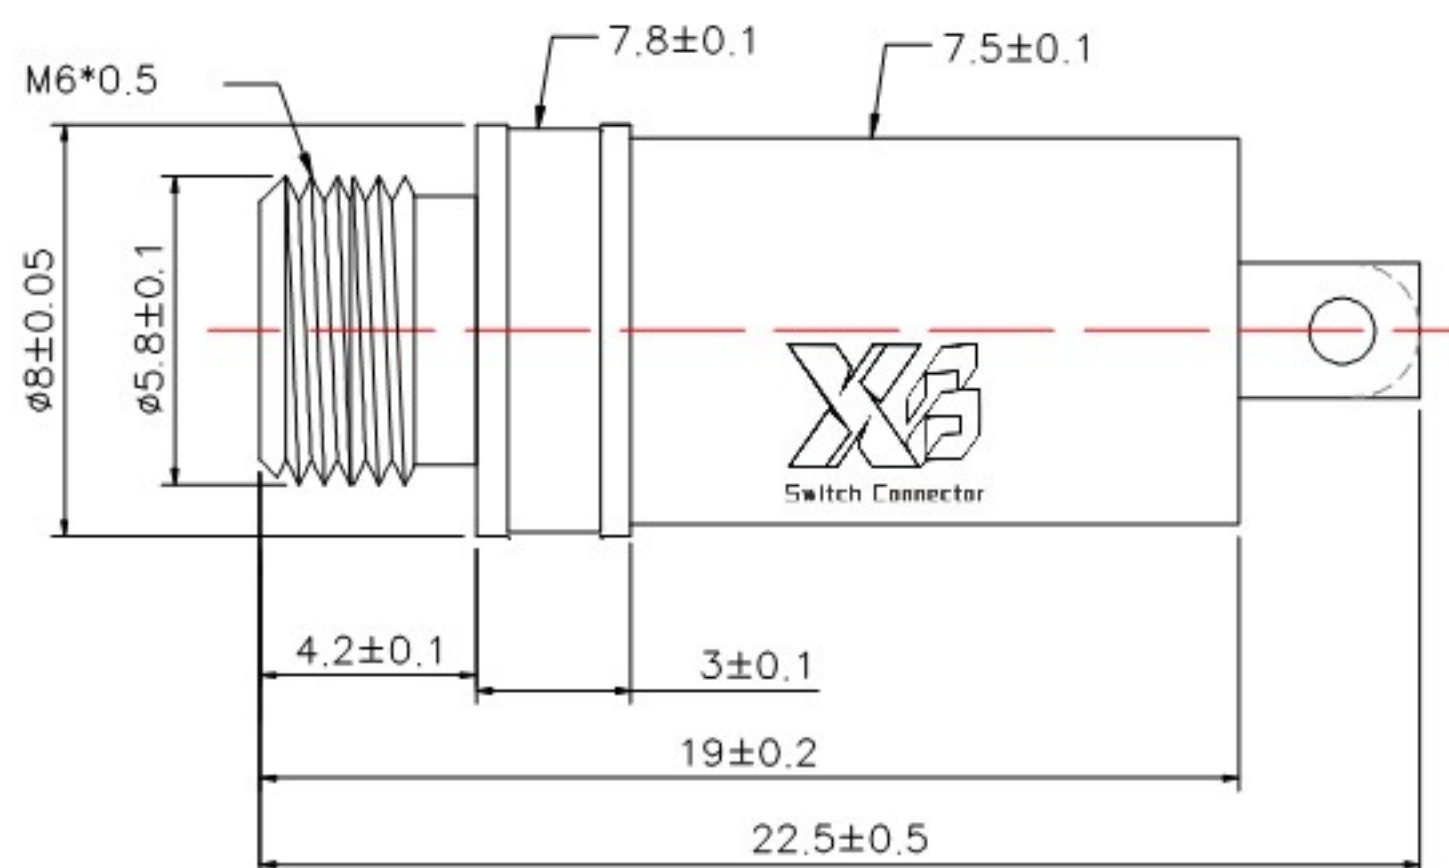
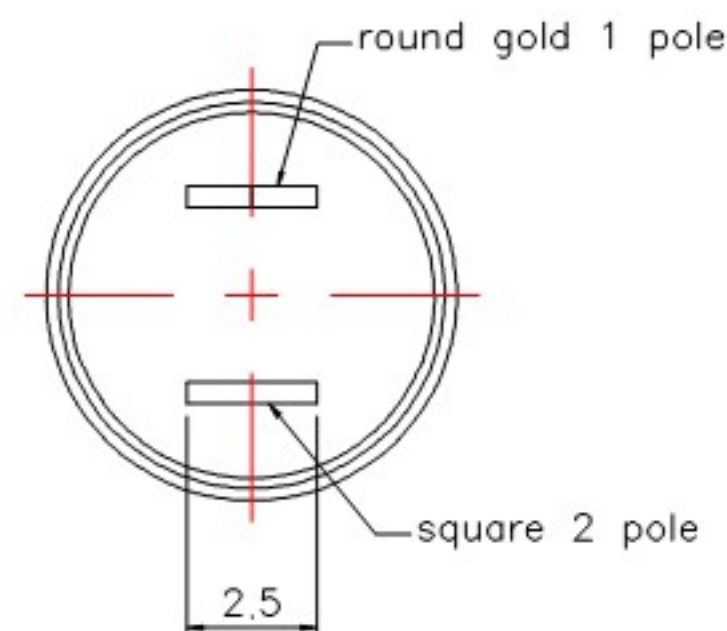


版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180815

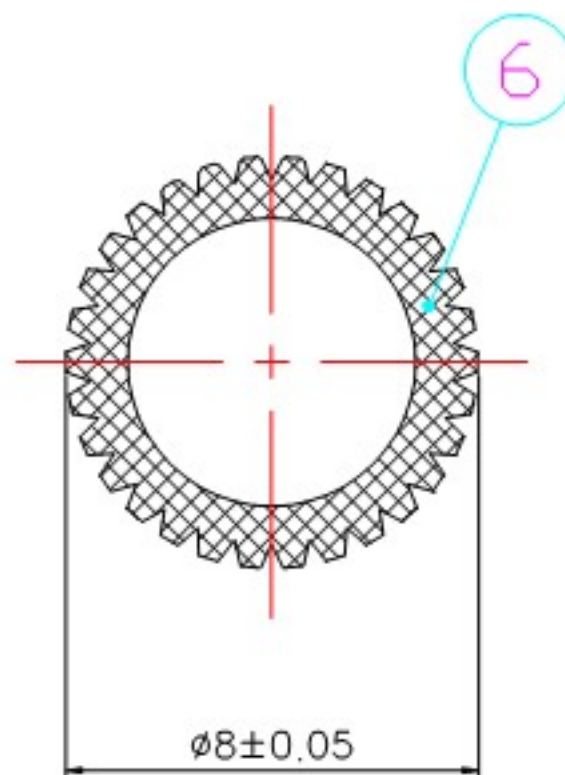

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal
force:0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance xx.:±0.3 x.x:±0.1 .xx:±0.05	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
比例 Scale	5:1		6	滚花螺帽	C3604	NI 40~120μ				
视图 Third angle projection 			5	外管	C3604	NI 40~120μ				
			4	二极片	C5191	NI 40~120μ				
			3	一极片	C5191	NI 40~120μ/Au0.8-1u"				
			2	PLASTIC	PBT	WHITE				
			1	PLASTIC	POM	WHITE				
		NO.	PART	MATERIAL	PLATING					

规格 DESCRIPTION:	3.5 AUDIO JACK φ3.5*φ6.0*22.5
品名 P/N:	J353Y6080加滚花螺帽
图号 DRAWN NO:	CP-06-0032