
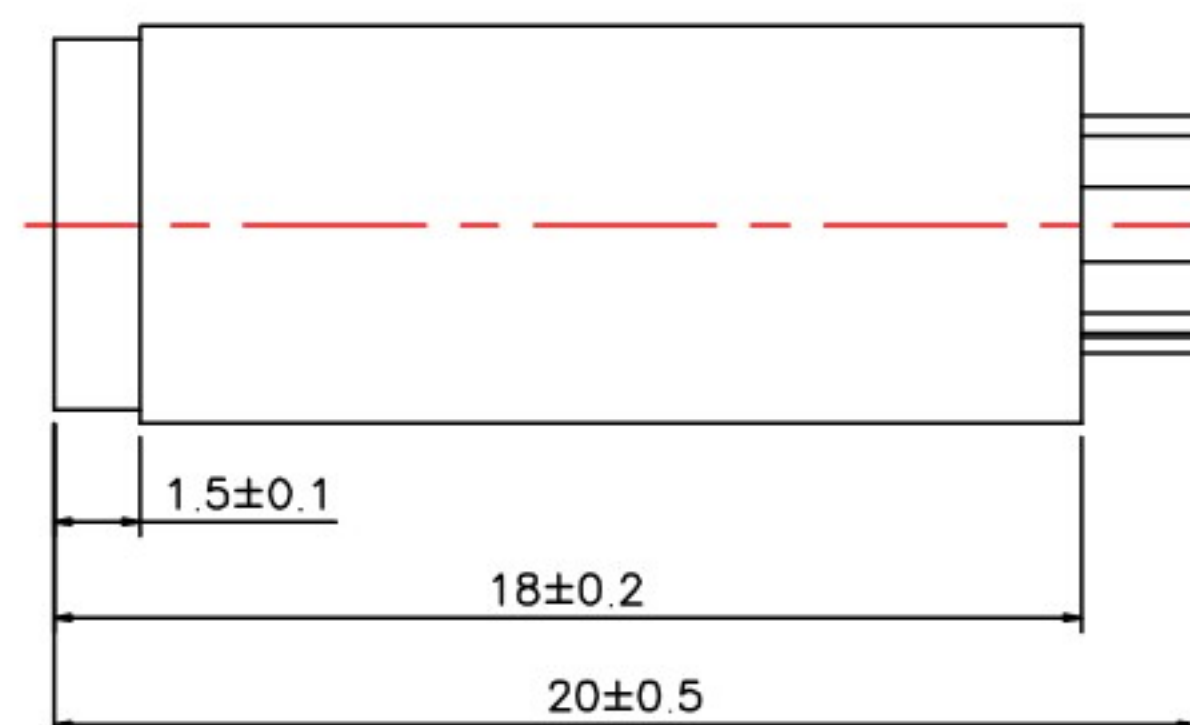
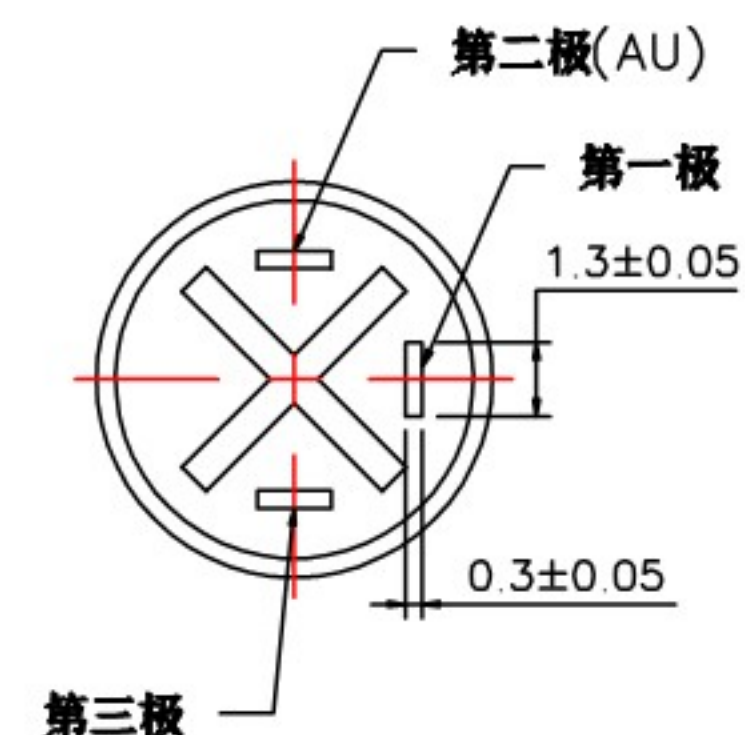
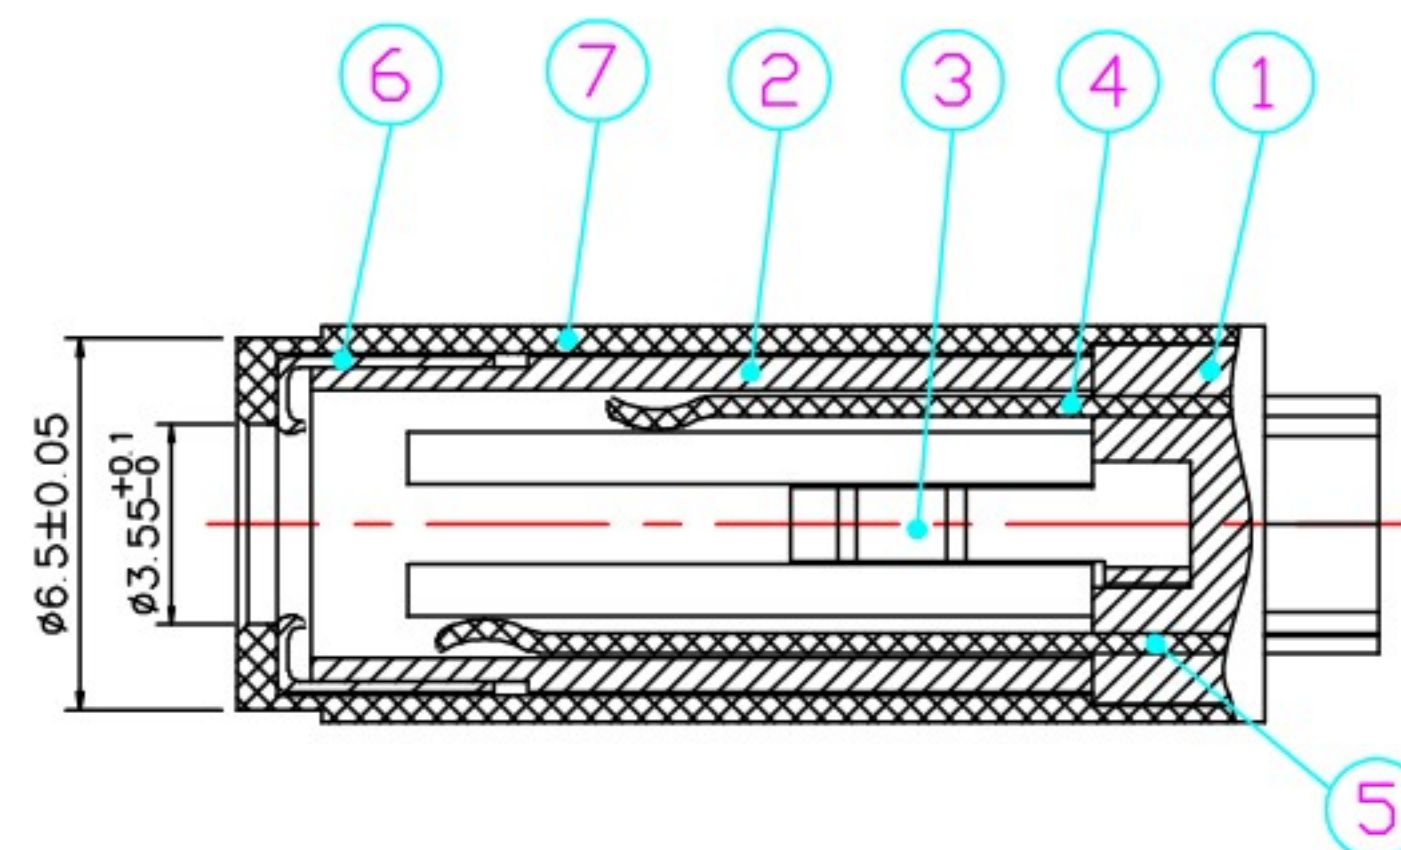


ROHS

版 本 REV	修正标记 REV. LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

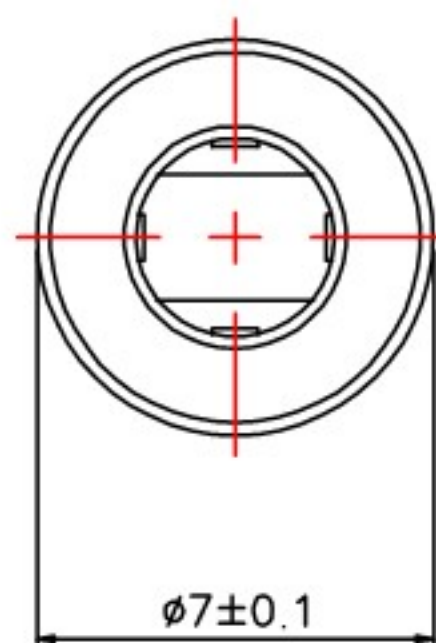

Technology Request;

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100M Ω;
 - b:Endure voltage:AC500V at 1 minute;
 - c>Contact resistance:Under 30m Ω;
- 3.Insertion force & withdrawal force: 0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	铜 管	C3604	Ni 2um-5um
比例 Scale	5:1	xx. : ±0.3	6	3.5四极四极弹圈	C5191	Ni 2um-5um
			5	3.5四极三极片	C5191	Ni 2um-5um
			4	3.5四极二极片	C5191	Ni60u" Au1u"
			3	3.5四极一极片	C5191	Ni 2um-5um
			2	PLASTIC	PCM	WHITE
视图 Third angle projection		x. x: ±0.1	1	PLASTIC	PCM	WHITE
			NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格	DESCRIPTION:	3.5四极JACK 03.5*07.0*20
品名	P/N:	J35470
图号	DRAWN NO:	CP-06-0051