
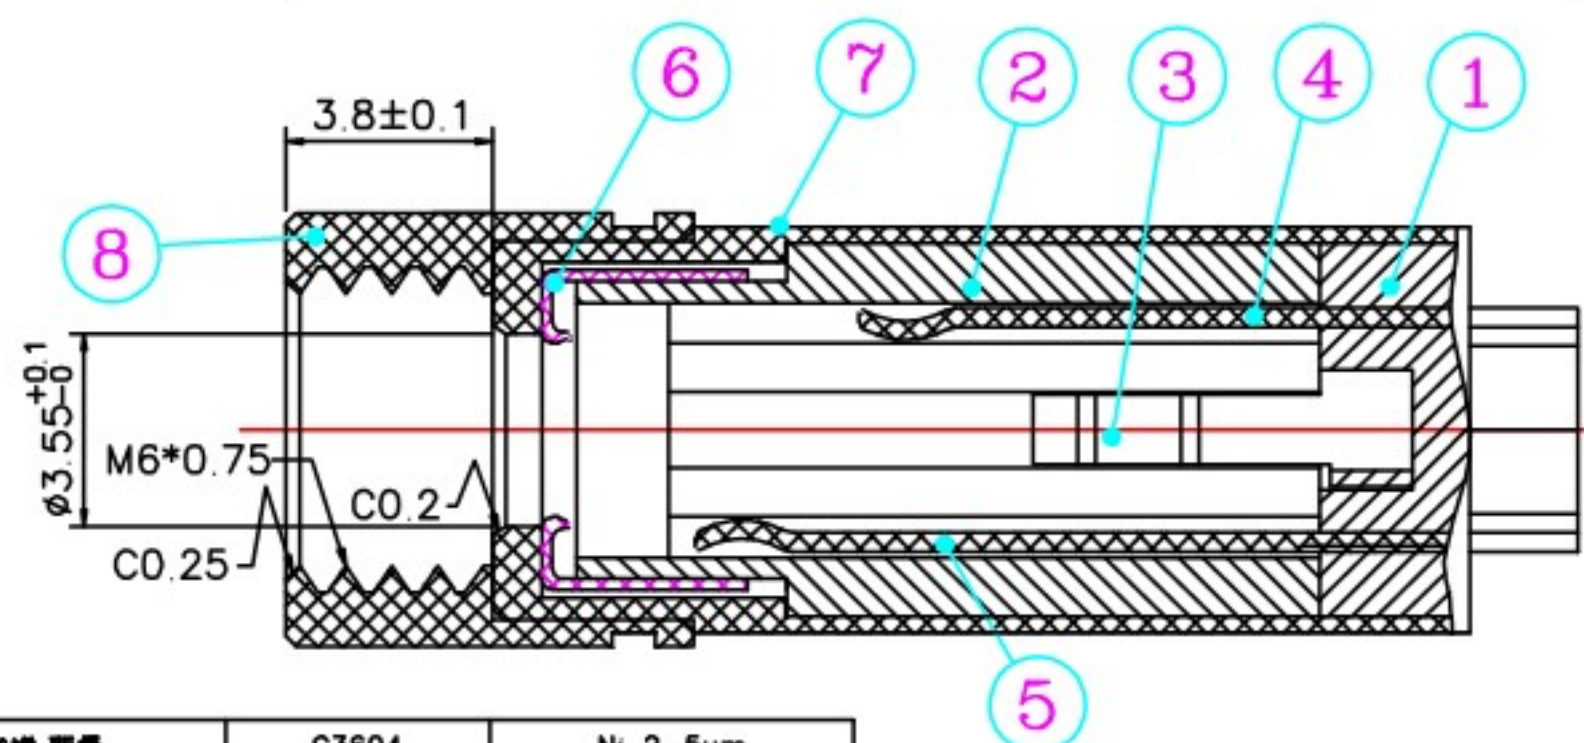
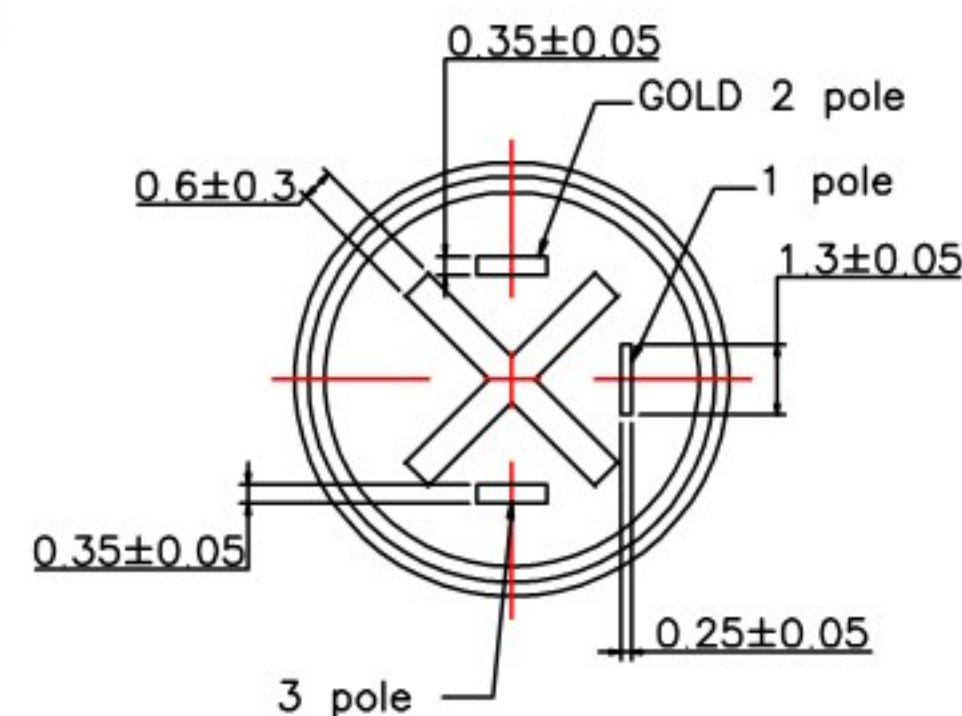
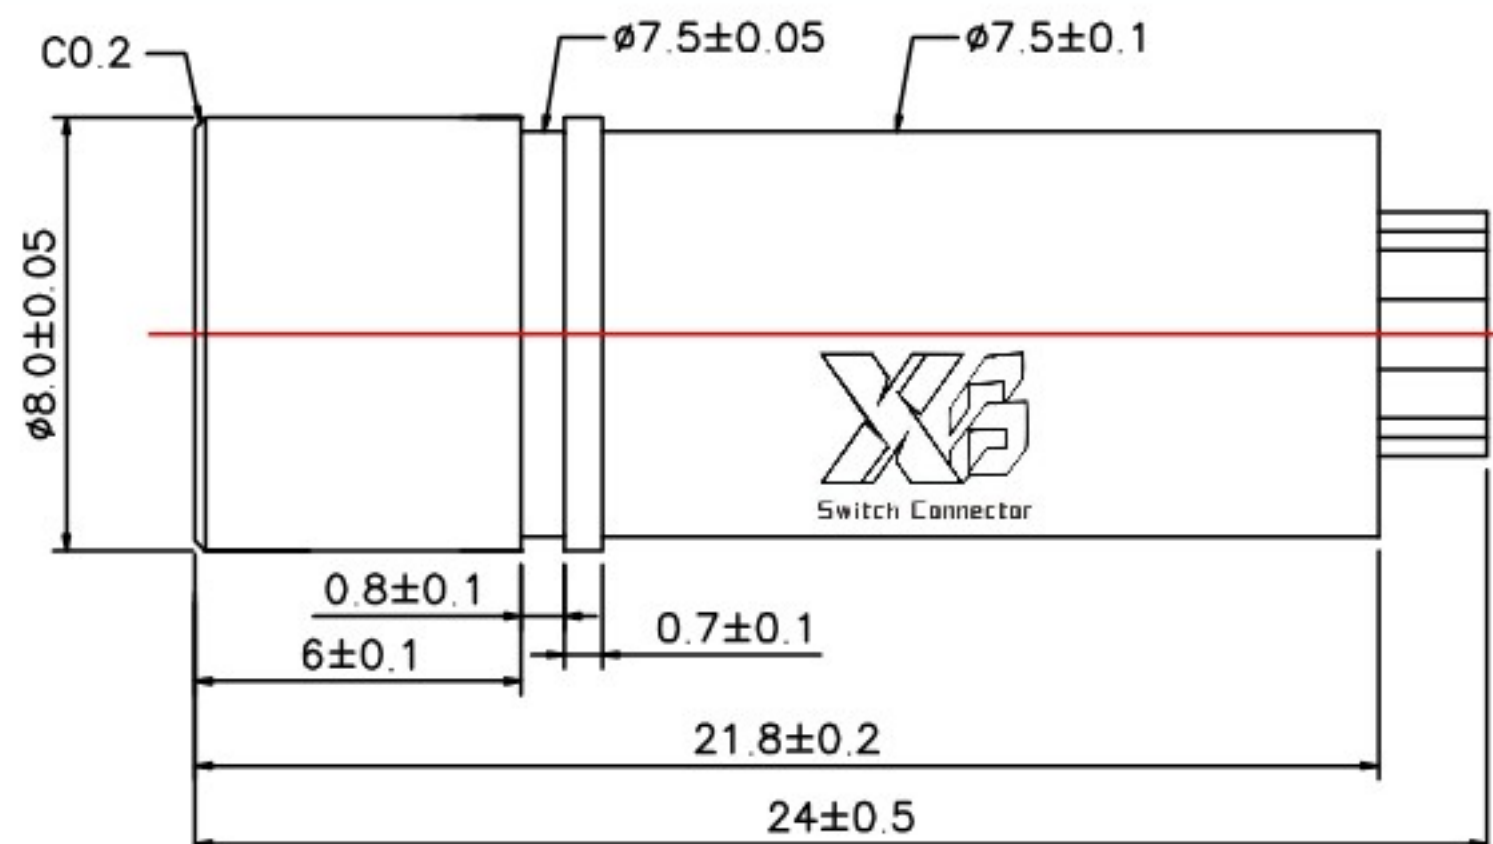
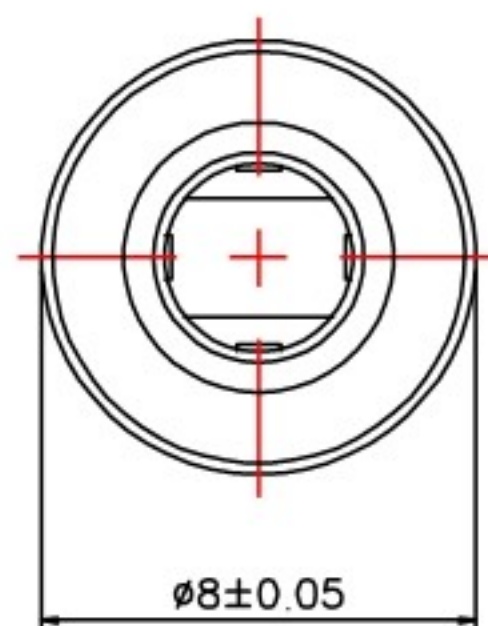


ROHS

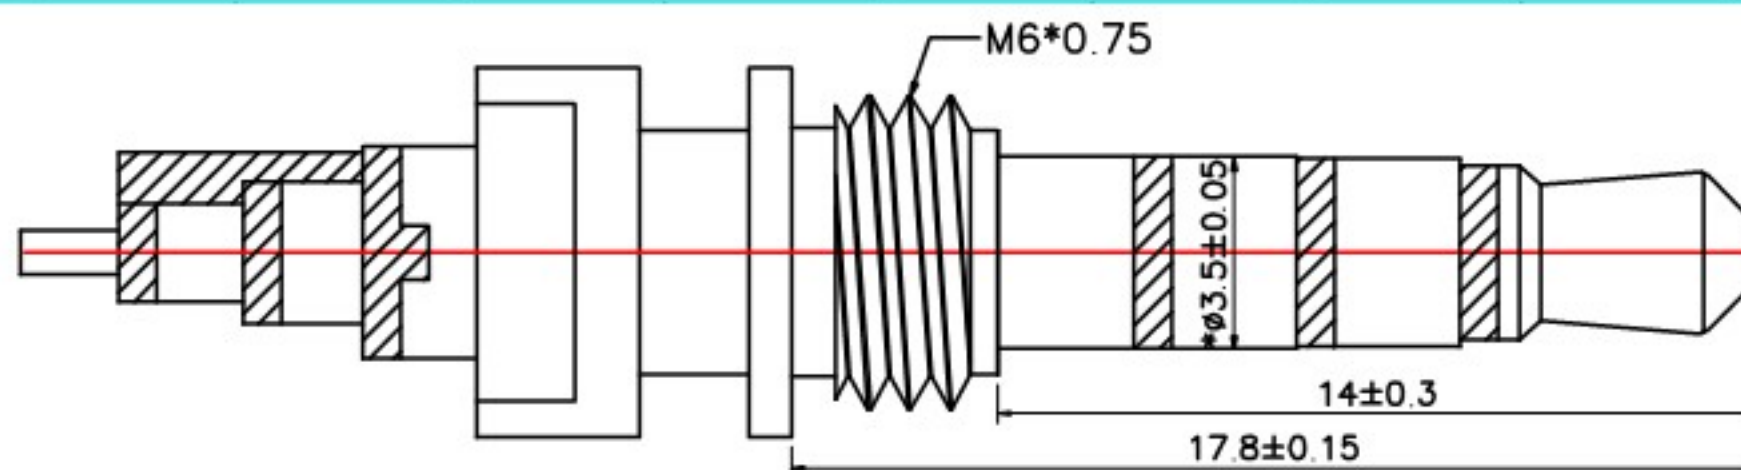

Technology Request:

1.Outlook:

No burr, no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ;

b.Endure voltage:

AC500V at 1 minute;

c.Contact resistance:

Under 30mΩ;

3.Insertion force & withdrawal force:

0.3-3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	xx:±0.3
视图 Third angle projection		xx:±0.1
		xx:±0.05

8	8*7.5*4*4*4.75管	C3604	Ni 2-5um
7	7.5*4*4*4.75管	C3604	Ni 2-5um
6	3.5*4*4*4.75管	C5191	Ni 2-5um
5	3.5*4*4*4.75管	C5191	Ni 2-5um
4	3.5*4*4*4.75管	C5191	Ni50u"Au1u"
3	3.5*4*4*4.75管	C5191	Ni 2-5um
2	PLASTIC	POM	white
1	PLASTIC	PBT	white
NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	苏伟伦



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	3.5 4POLE JACK 3.5*8.0*24
品名 P/N:	J35480-240-M6
图号 DRAWN NO:	CP-06-0073