


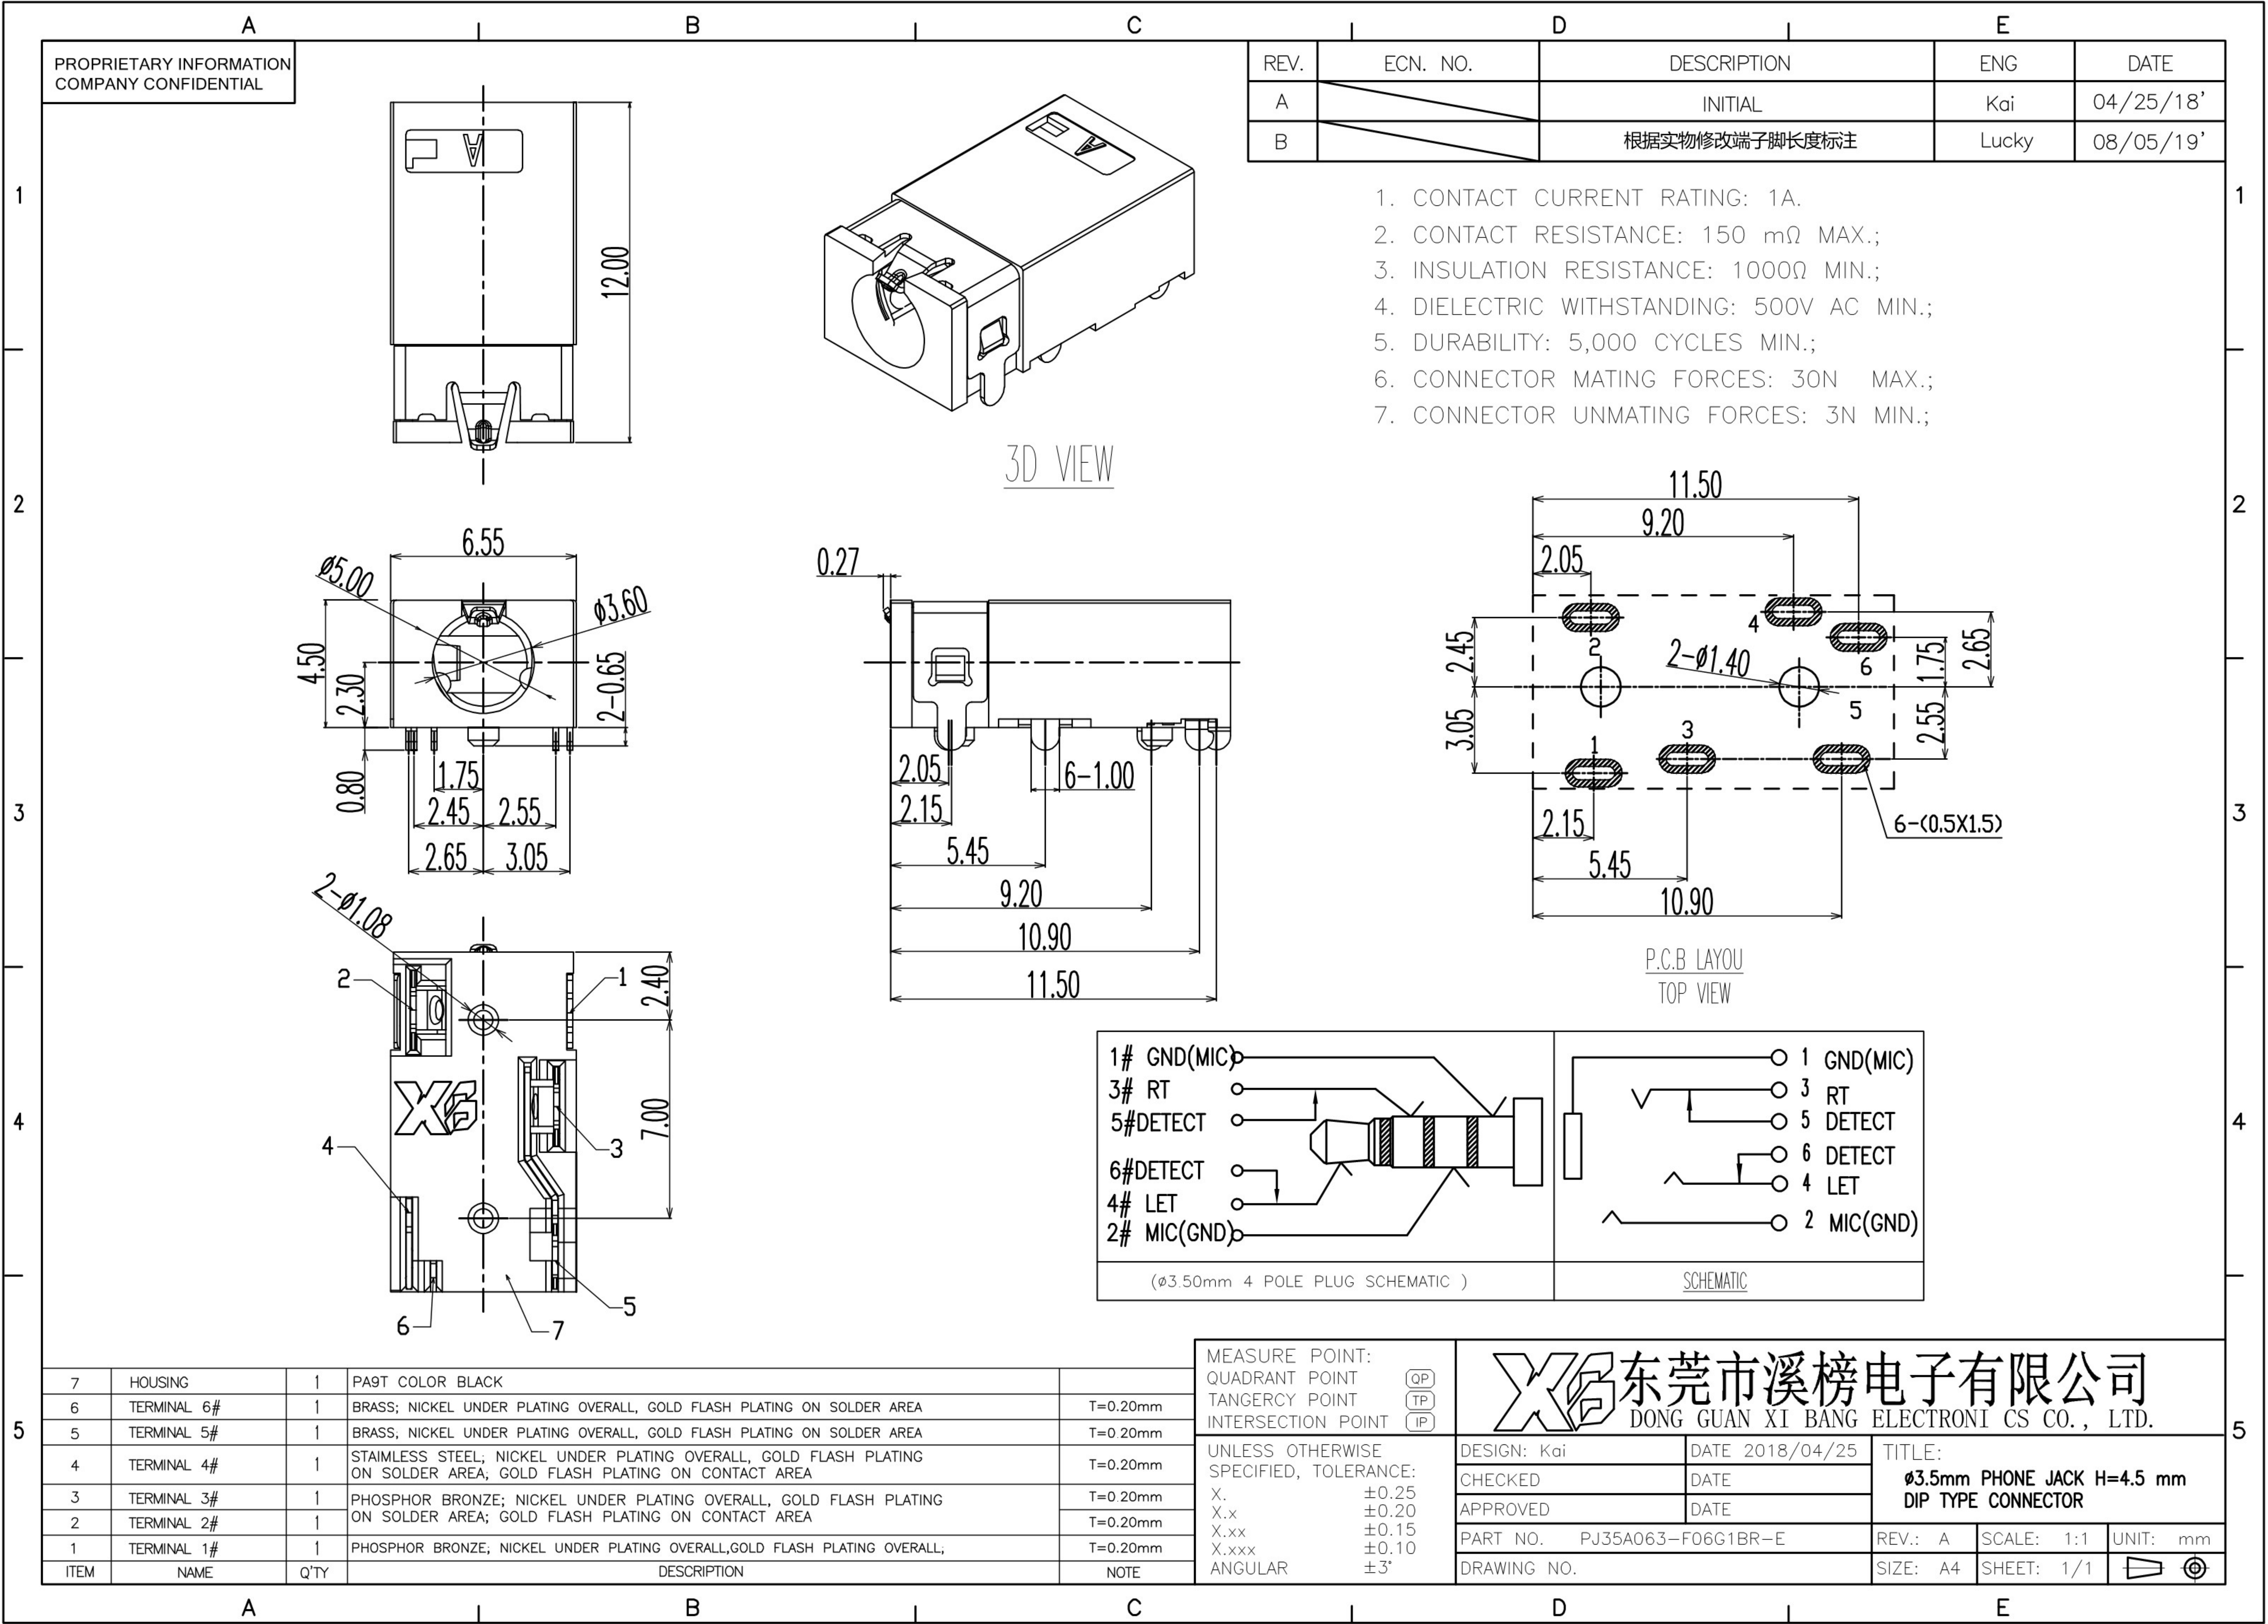


PROPRIETARY INFORMATION  
COMPANY CONFIDENTIAL

| REV. | ECN. NO. | DESCRIPTION   | ENG   | DATE      |
|------|----------|---------------|-------|-----------|
| A    |          | INITIAL       | Kai   | 04/25/18' |
| B    |          | 根据实物修改端子脚长度标注 | Lucky | 08/05/19' |

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 150 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

3D VIEW

P.C.B LAYOUT  
TOP VIEW

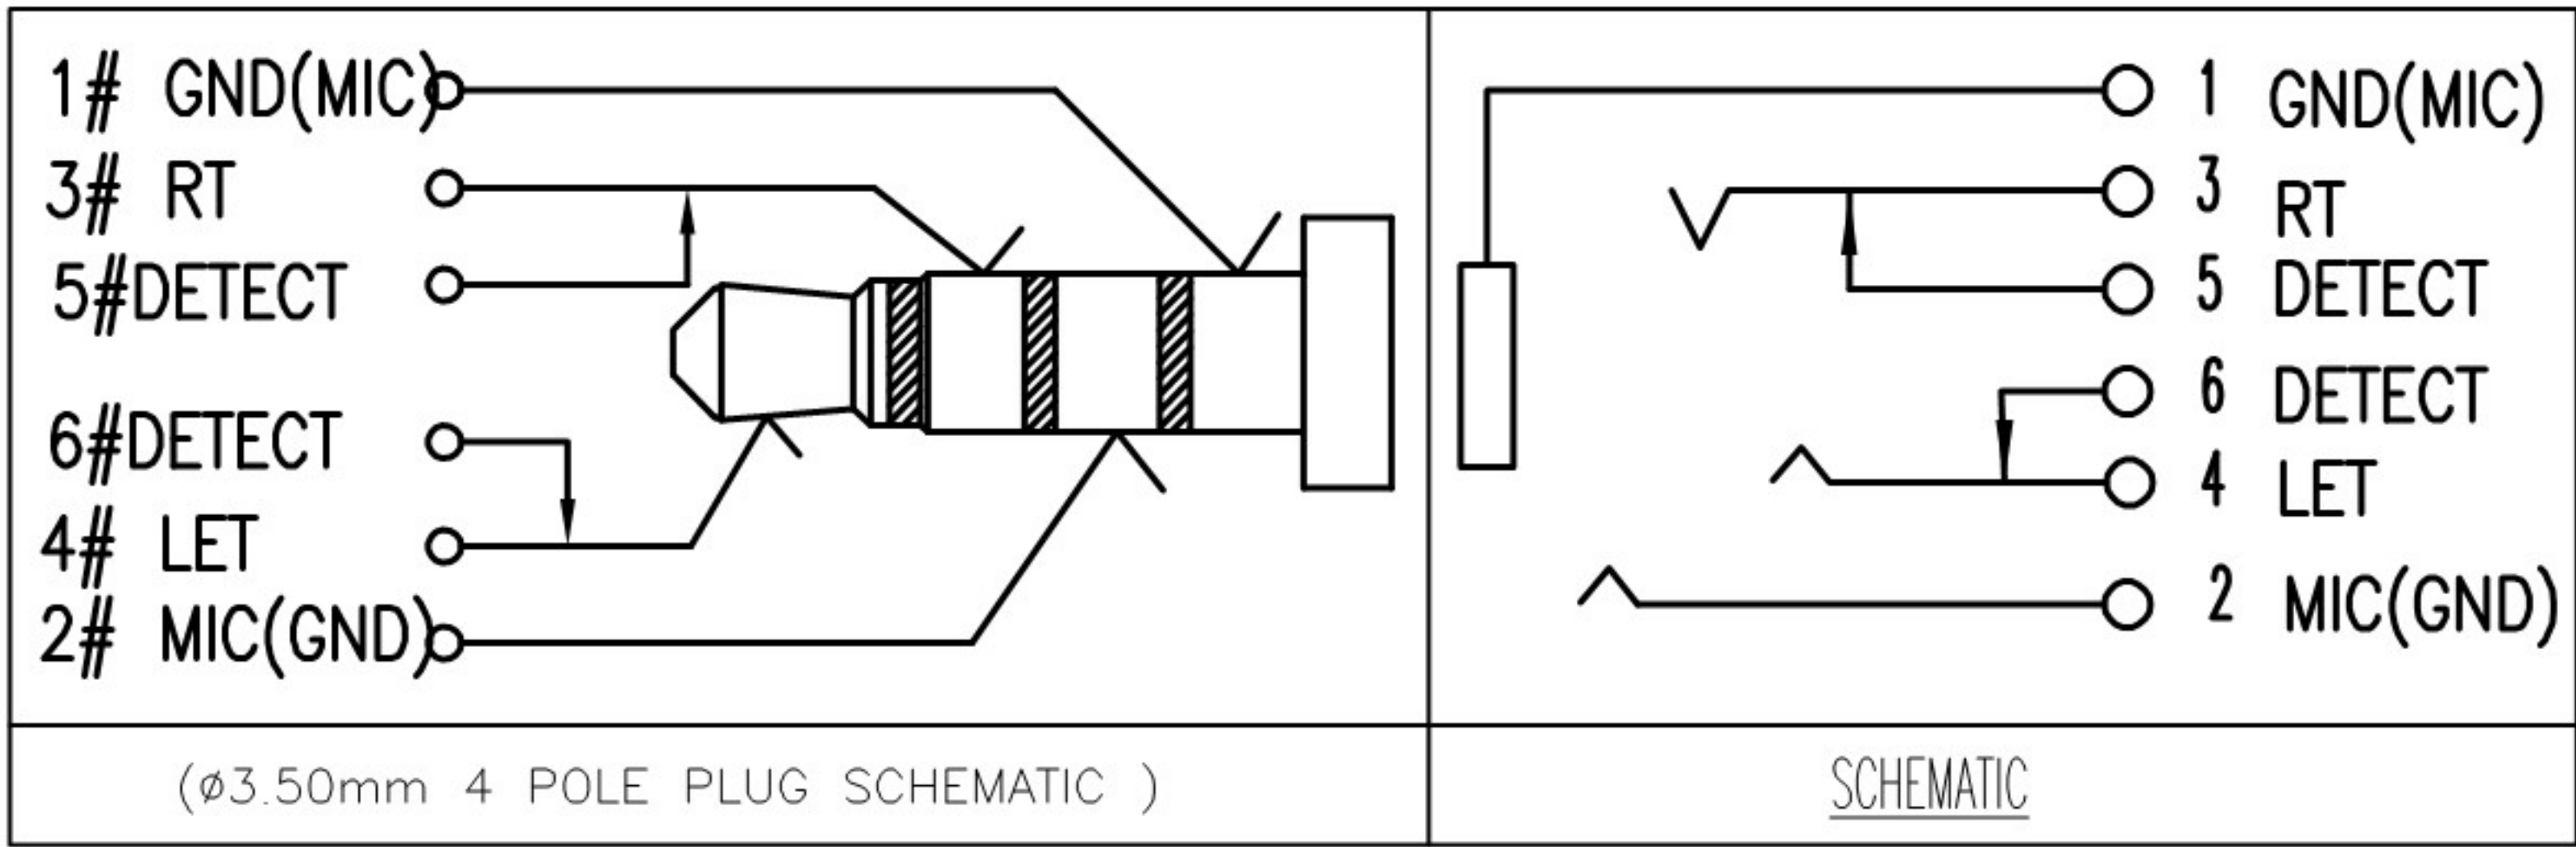

|      |             |      |                                                                                                                      |          |
|------|-------------|------|----------------------------------------------------------------------------------------------------------------------|----------|
| 7    | HOUSING     | 1    | PA9T COLOR BLACK                                                                                                     |          |
| 6    | TERMINAL 6# | 1    | BRASS; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA                                               | T=0.20mm |
| 5    | TERMINAL 5# | 1    | BRASS, NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA                                               | T=0.20mm |
| 4    | TERMINAL 4# | 1    | STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA | T=0.20mm |
| 3    | TERMINAL 3# | 1    | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA | T=0.20mm |
| 2    | TERMINAL 2# | 1    | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA | T=0.20mm |
| 1    | TERMINAL 1# | 1    | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING OVERALL;                                           | T=0.20mm |
| ITEM | NAME        | Q'TY | DESCRIPTION                                                                                                          | NOTE     |

MEASURE POINT:  
QUADRANT POINT  
TANGENCY POINT  
INTERSECTION POINT



UNLESS OTHERWISE SPECIFIED, TOLERANCE:  
X. ±0.25  
X.x ±0.20  
X.xx ±0.15  
X.xxx ±0.10  
ANGULAR ±3°

**XG 东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

|                             |                 |                                                            |          |  |
|-----------------------------|-----------------|------------------------------------------------------------|----------|--|
| DESIGN: Kai                 | DATE 2018/04/25 | TITLE:<br>ø3.5mm PHONE JACK H=4.5 mm<br>DIP TYPE CONNECTOR |          |  |
| CHECKED                     | DATE            |                                                            |          |  |
| APPROVED                    | DATE            |                                                            |          |  |
| PART NO. PJ35A063-F06G1BR-E | REV.: A         | SCALE: 1:1                                                 | UNIT: mm |  |
| DRAWING NO.                 | SIZE: A4        | SHEET: 1/1                                                 |          |  |