
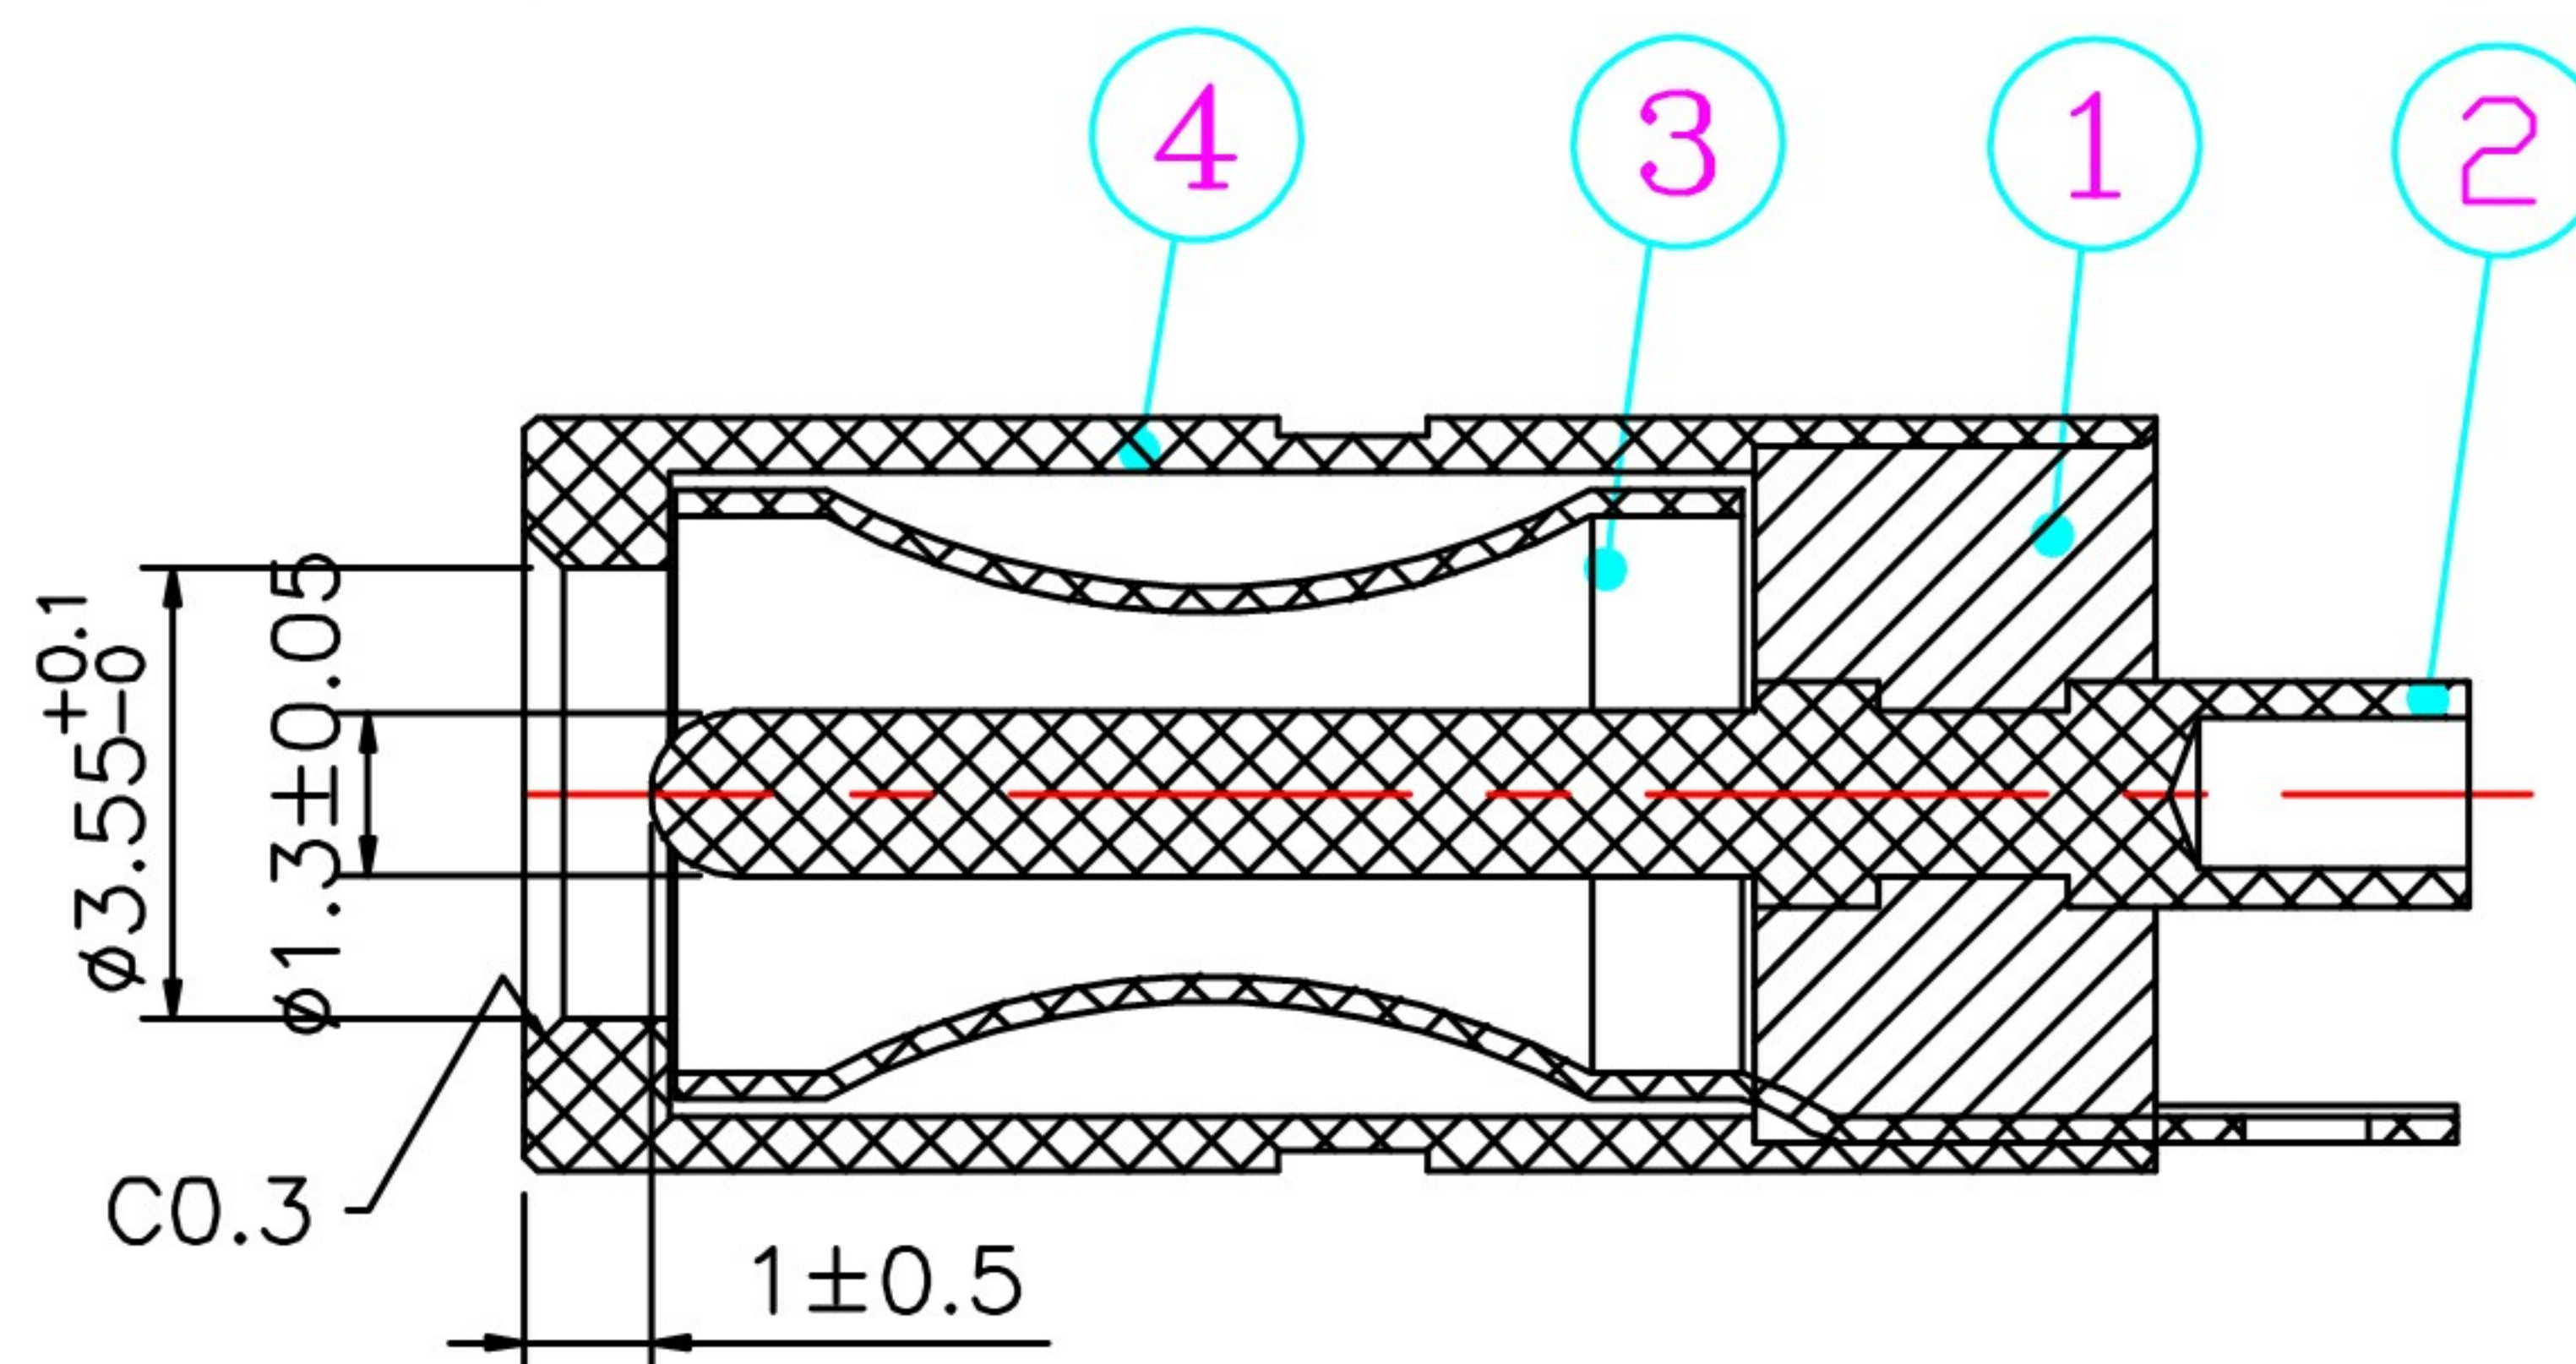


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

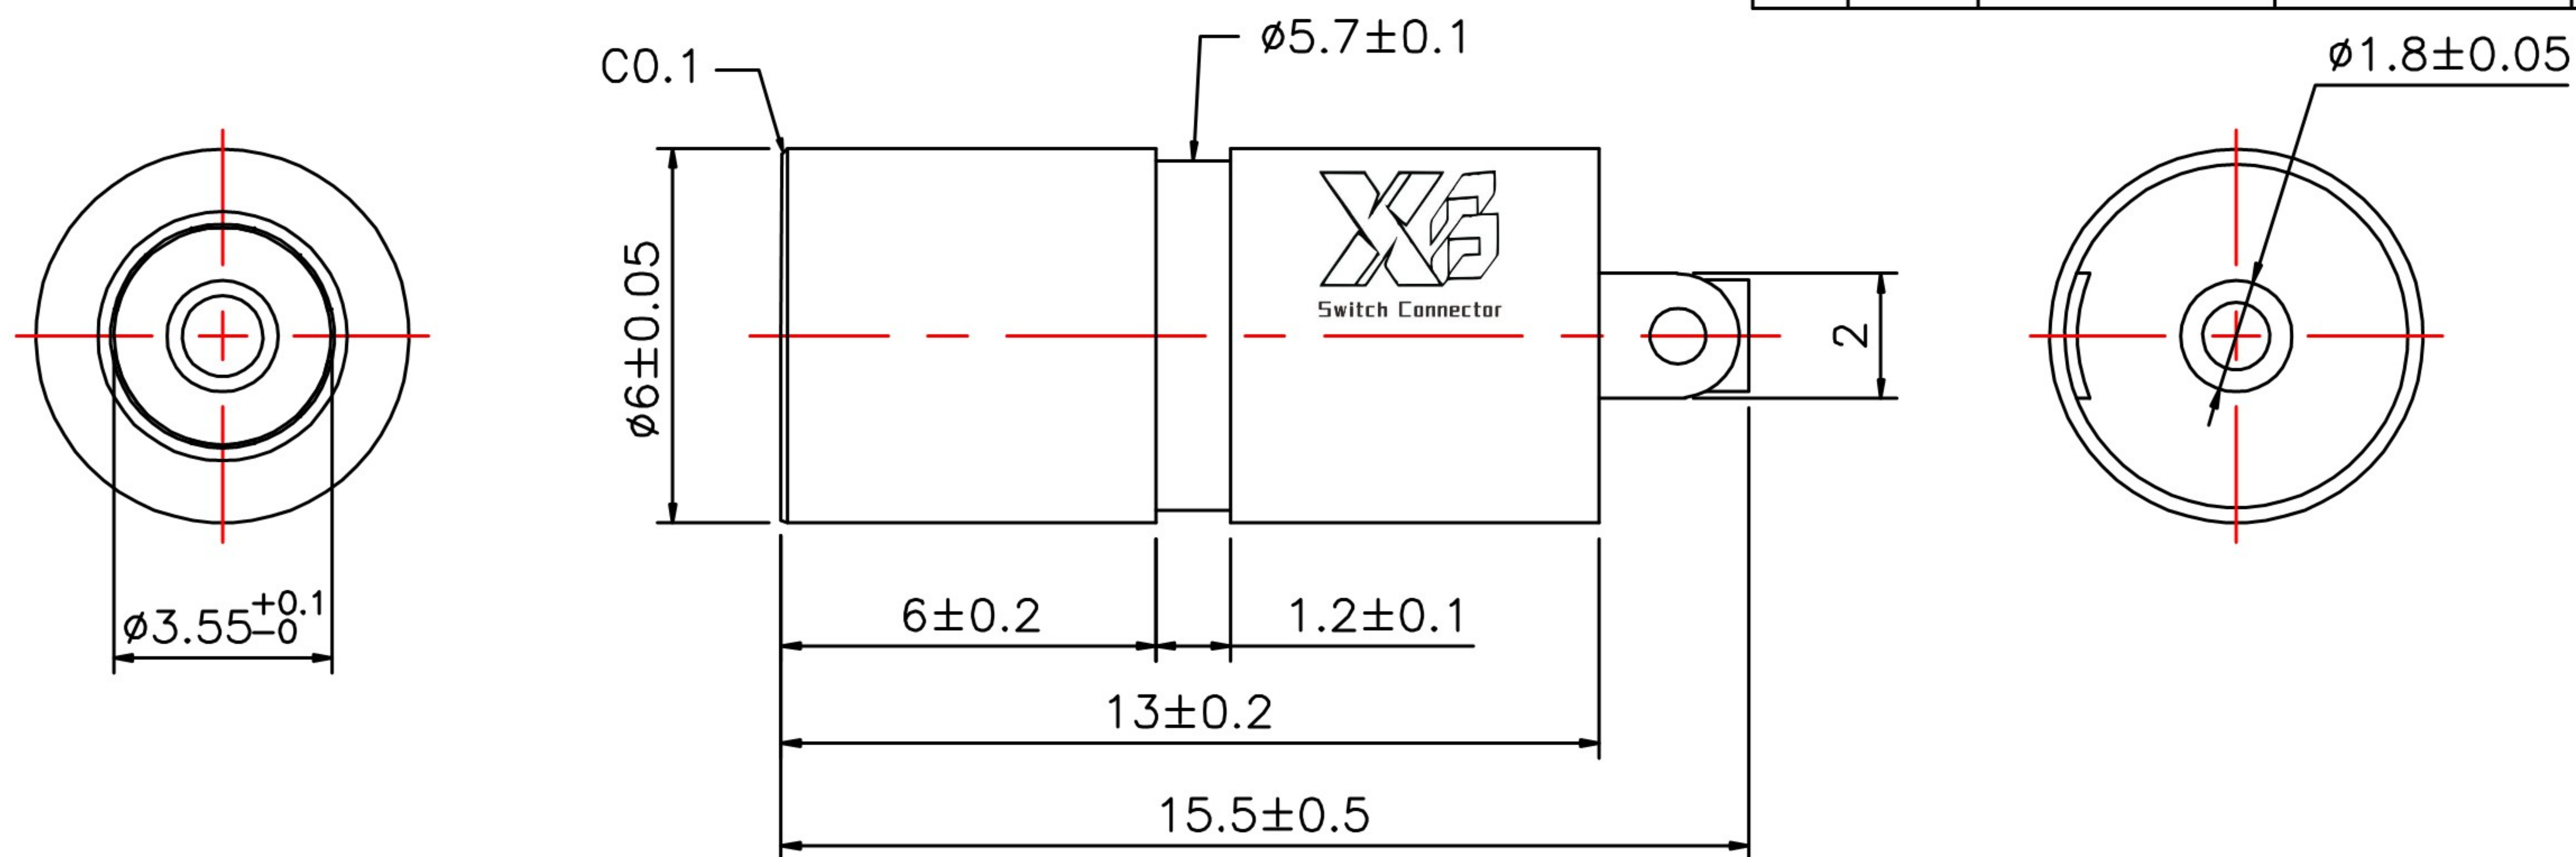

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	6	核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
比例 Scale	5:1	xx.:±0.3	5		June	杨义邦	李莹峰	规格 DESCRIPTION:	DC JACK Ø3.5*Ø1.35*15.5	
视图 Third angle projection		x.x.:±0.1	4	6*13*3.6管				品名 P/N:	35135JL60平胶	
		.xx.:±0.05	3	4.8*14带尾弹圈				图号 DRAWN NO:	CP-03-0035	
			2	1.3*1.8*14.5针						
			1	PLASTIC						
			NO.	PART						
				MATERIAL						
				PLATING						