
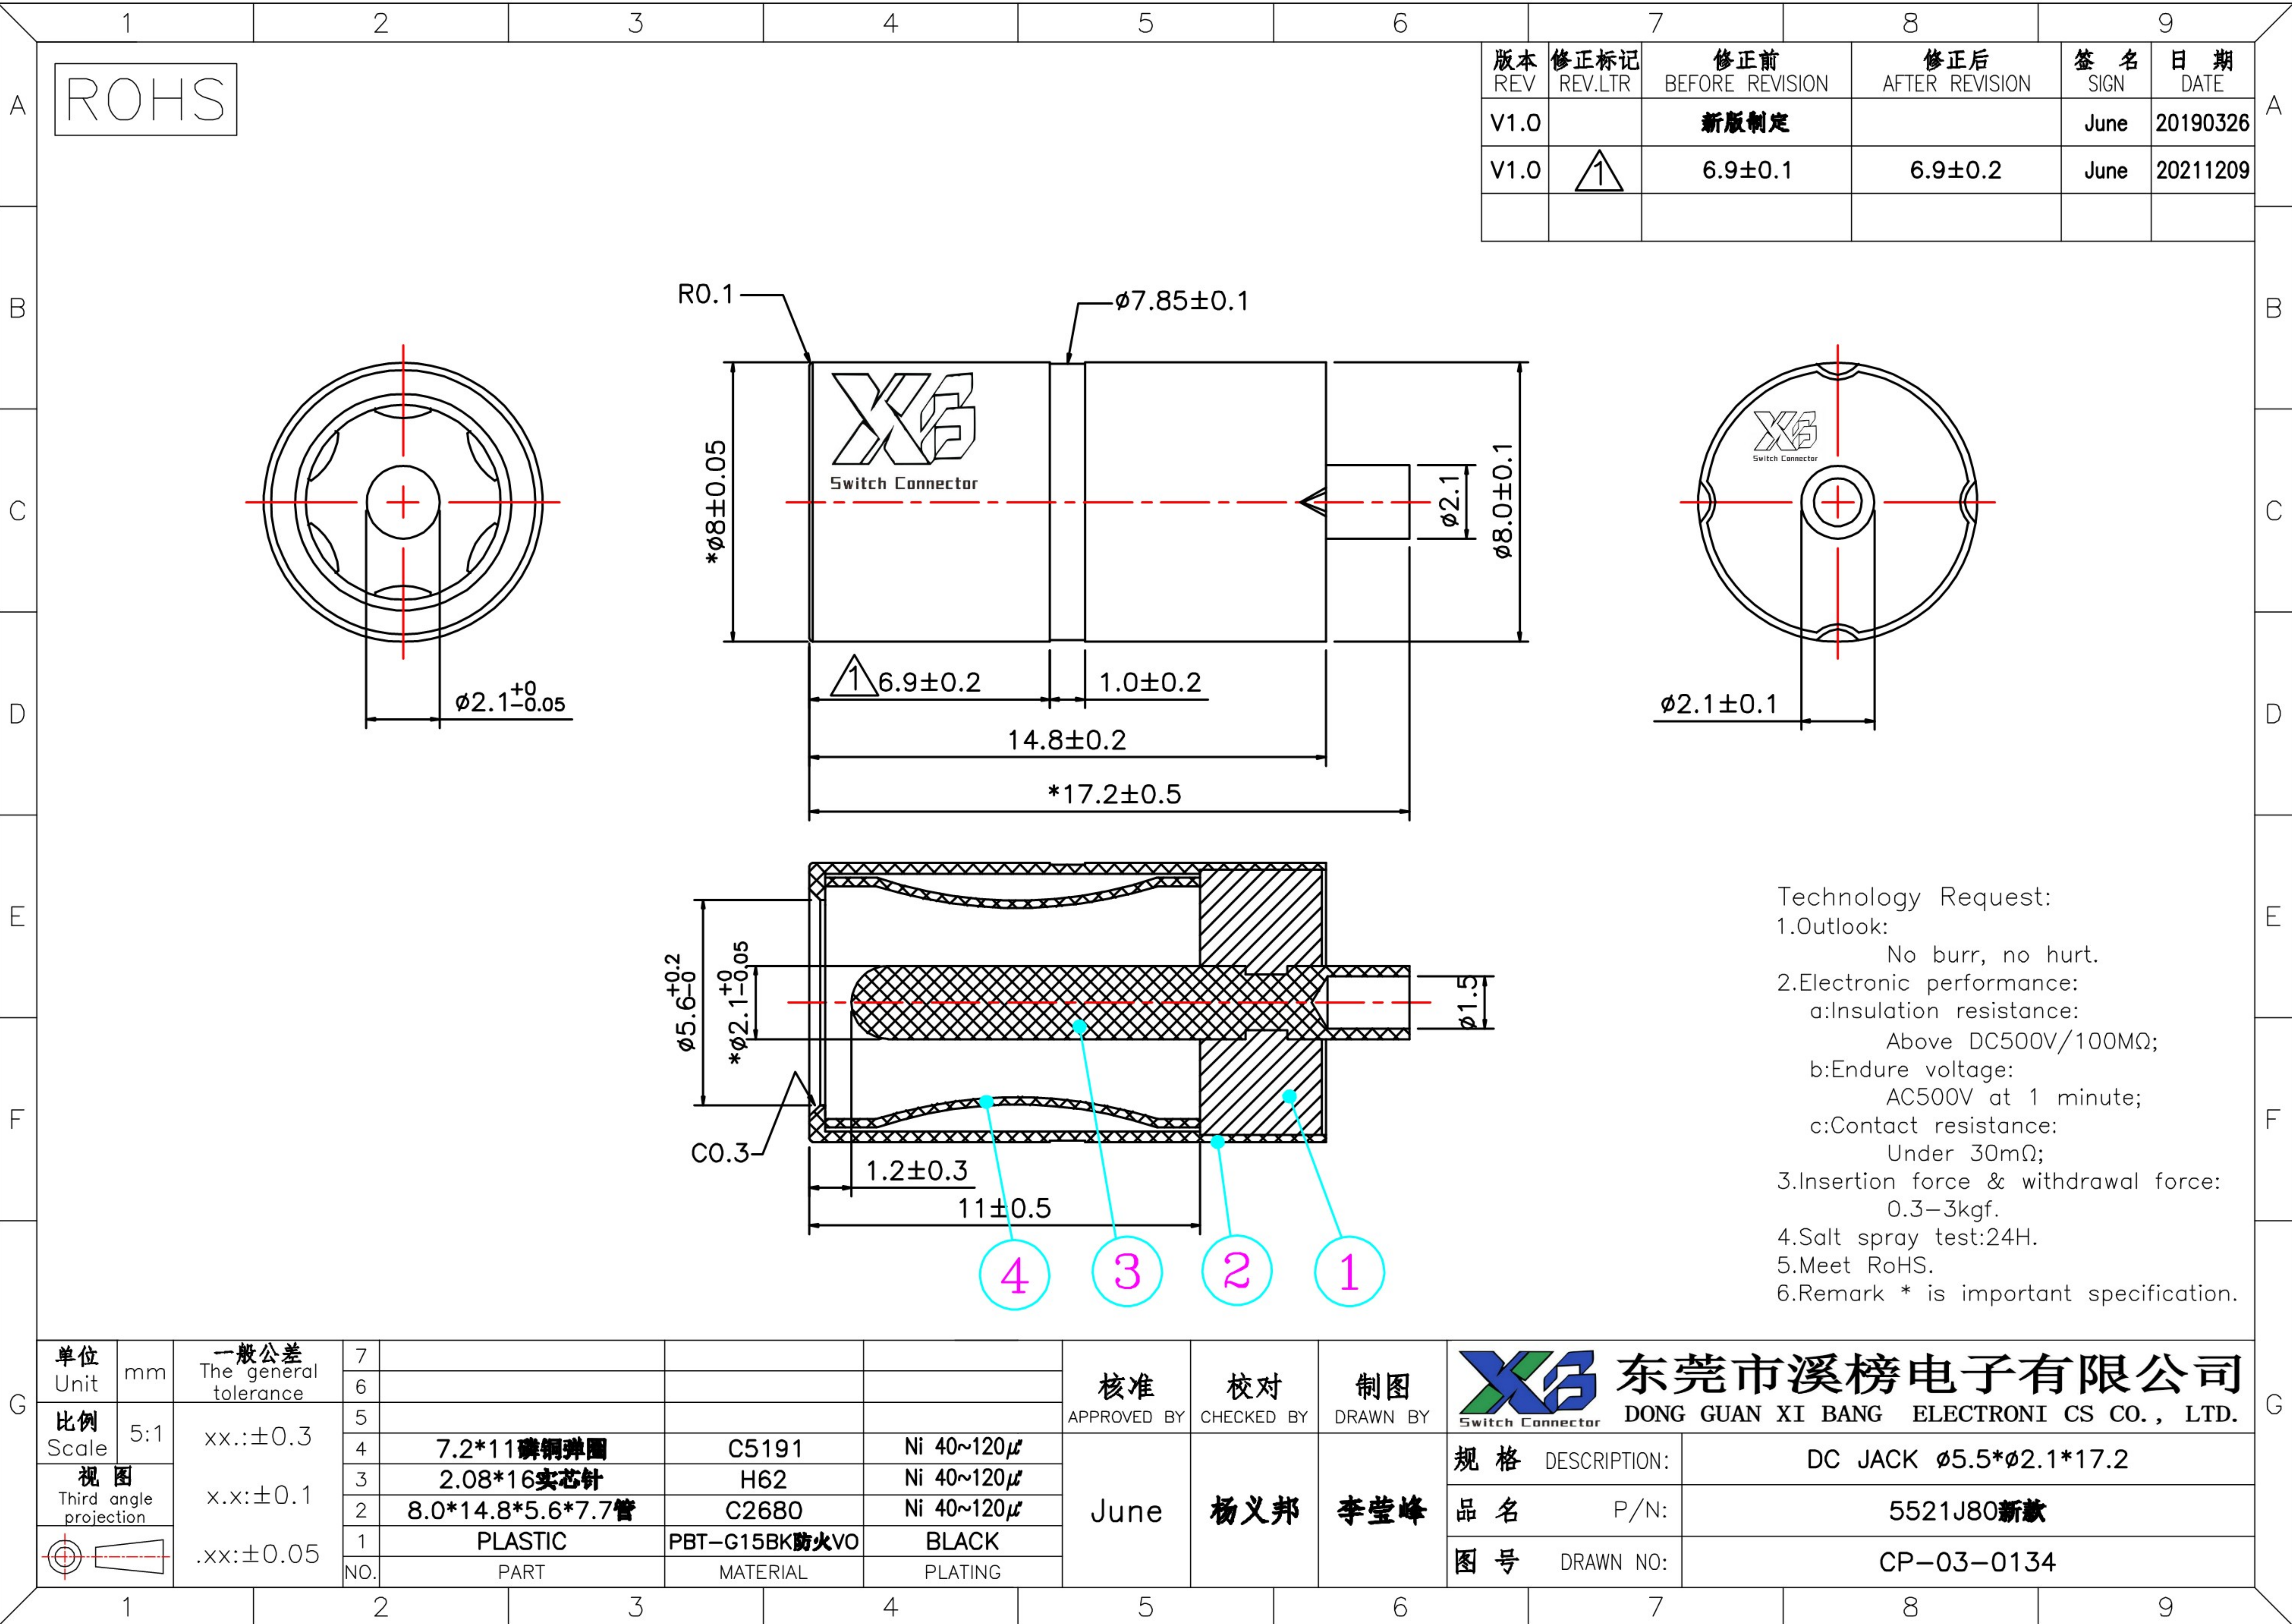


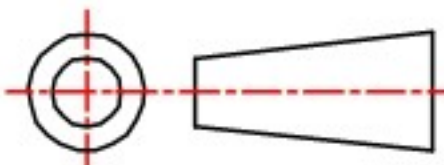

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20190326
V1.0	⚠	6.9±0.1	6.9±0.2	June	20211209

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.		
比例 Scale	5:1	xx.:±0.3	6									
			5									
视图 Third angle projection		x.x:±0.1	4	7.2*11磷铜弹圈	C5191	Ni 40~120μ	June	杨义邦	李莹峰		规格 DESCRIPTION:	DC JACK ø5.5*ø2.1*17.2
			3	2.08*16实芯针	H62	Ni 40~120μ					品 名 P/N:	5521J80新款
			2	8.0*14.8*5.6*7.7管	C2680	Ni 40~120μ				图 号 DRAWN NO:	CP-03-0134	
		.xx:±0.05	1	PLASTIC	PBT-G15BK防火VO	BLACK						
			NO.	PART	MATERIAL	PLATING						