
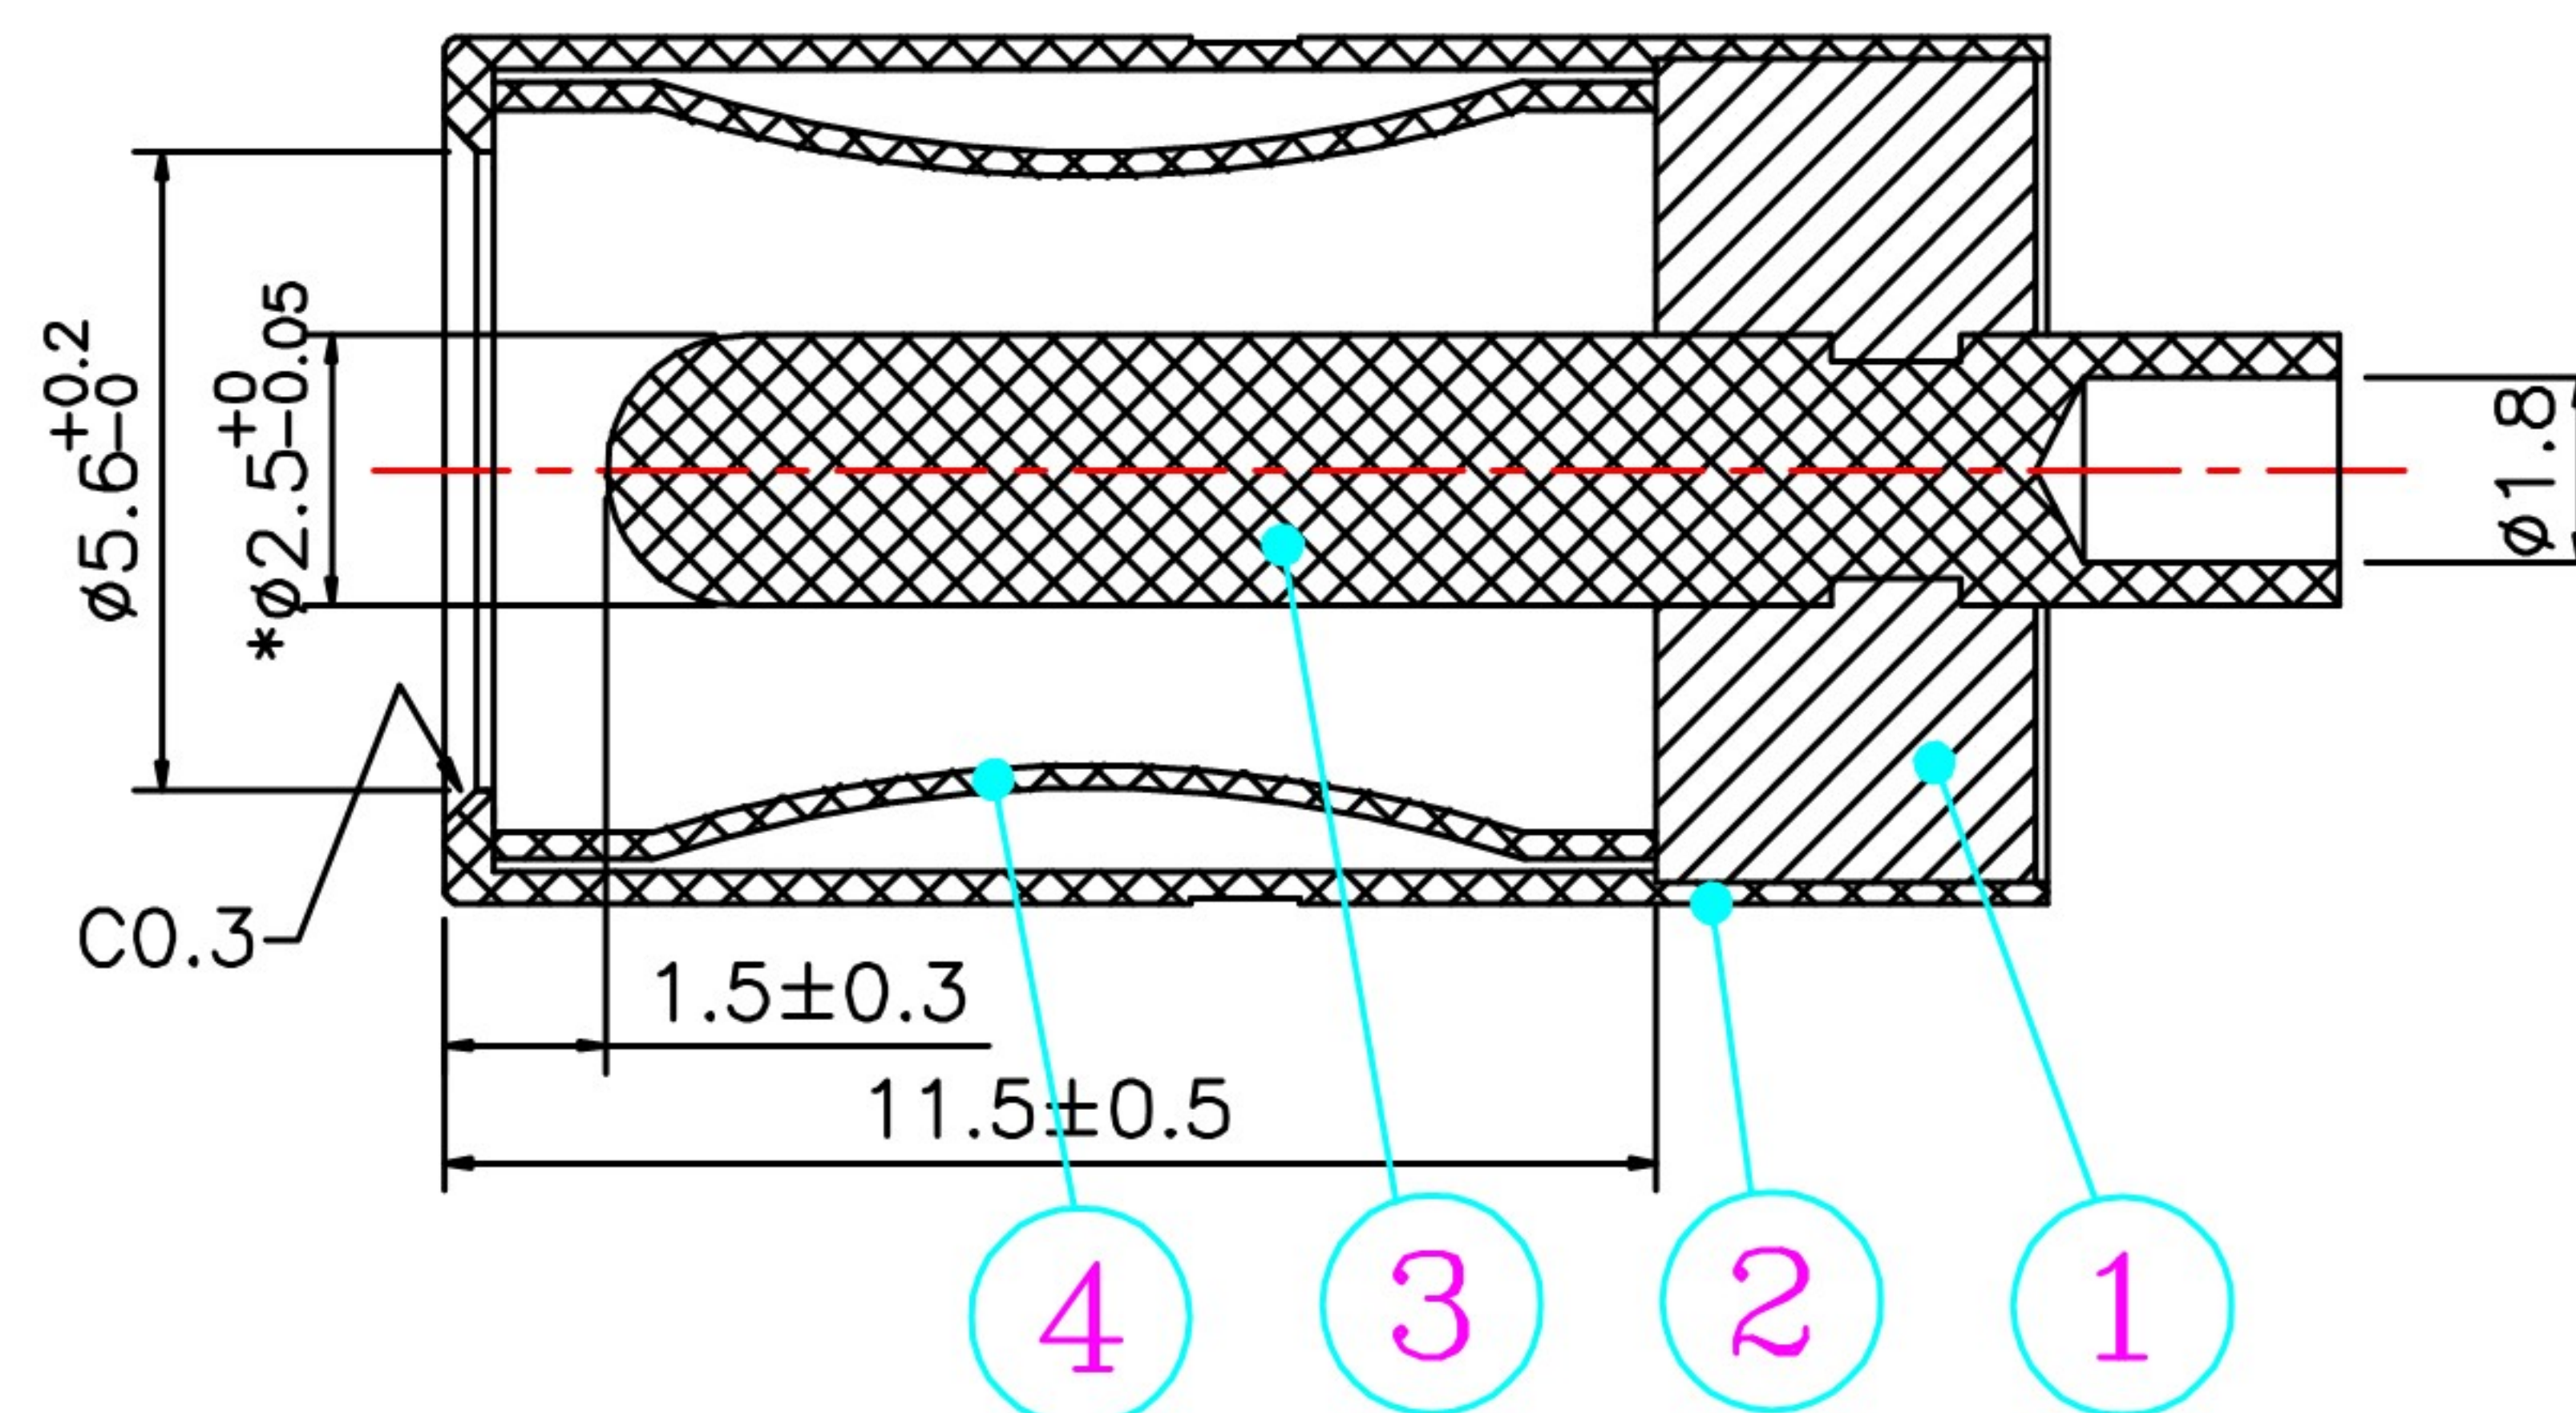
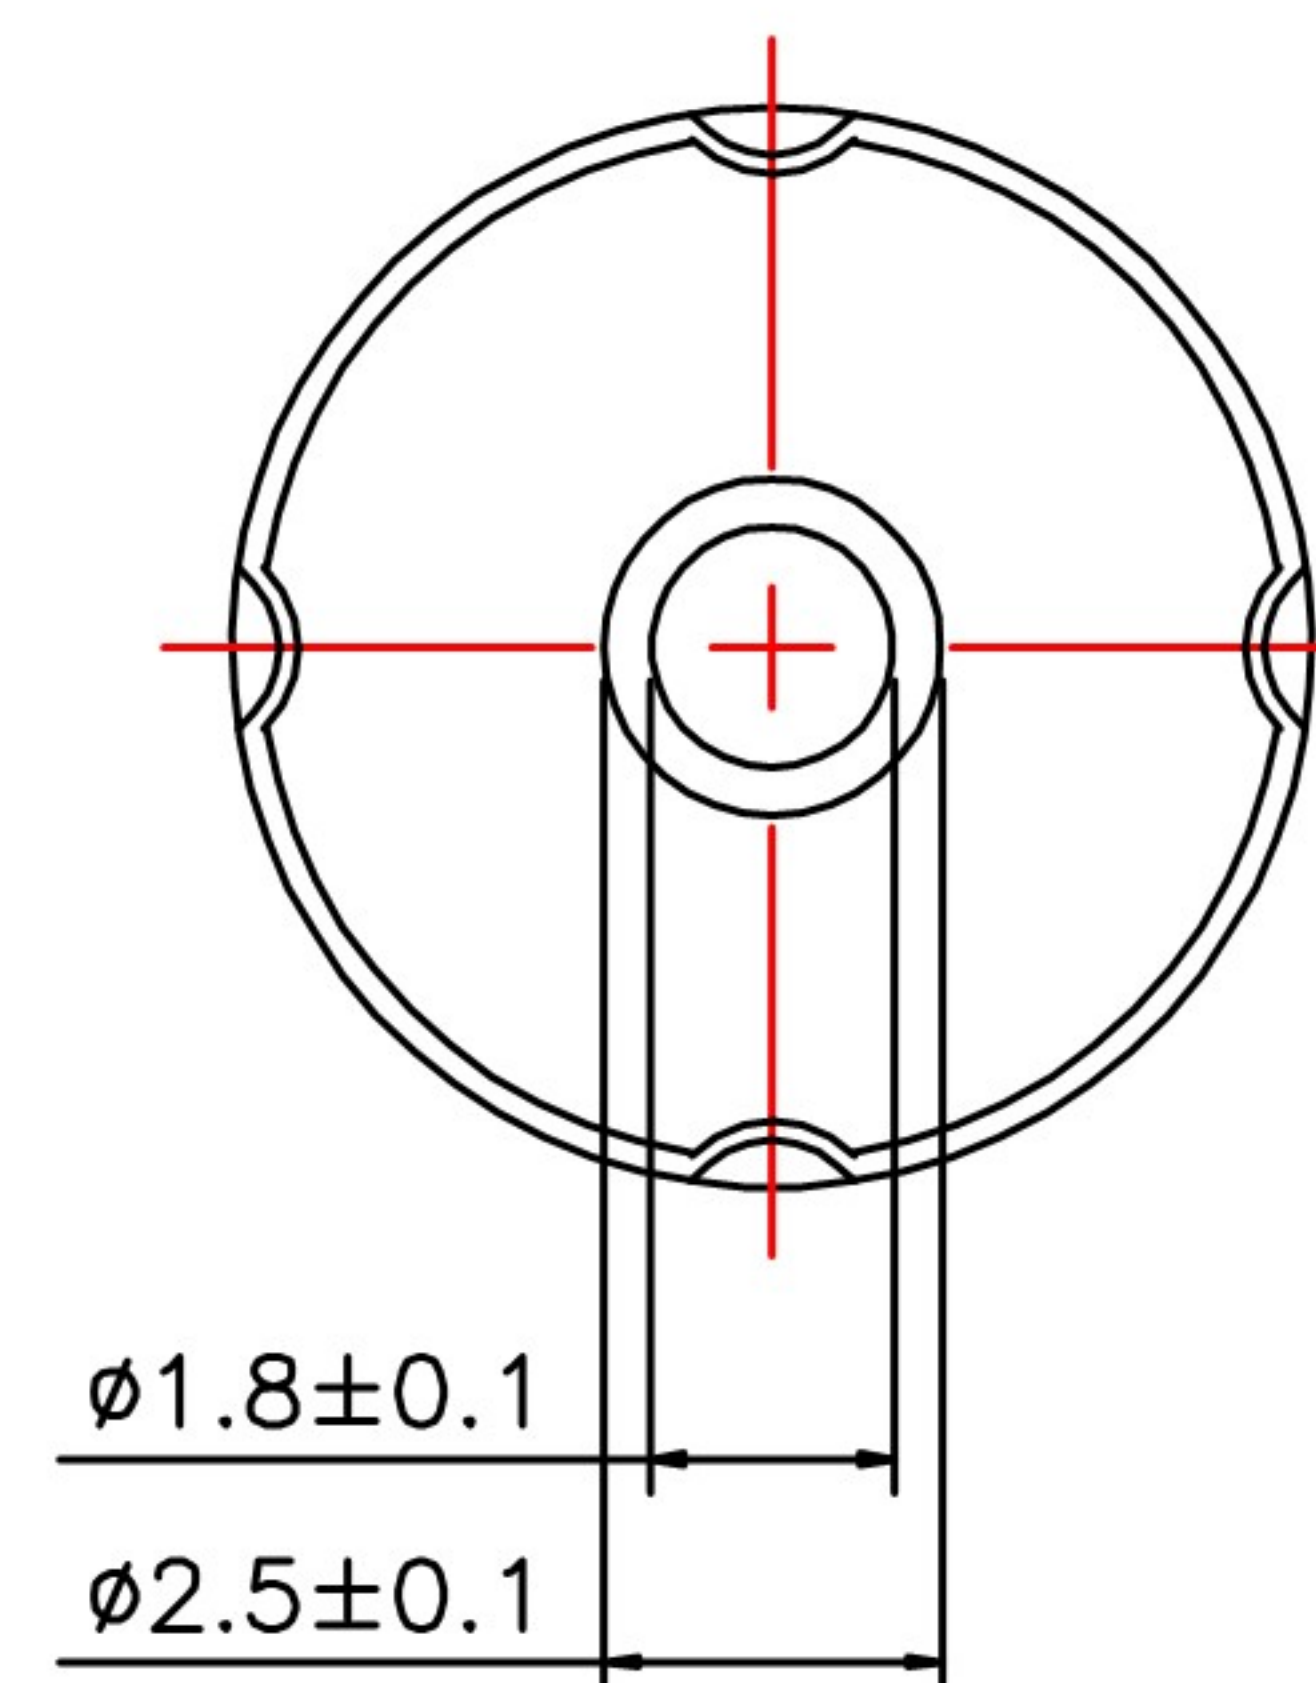


版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

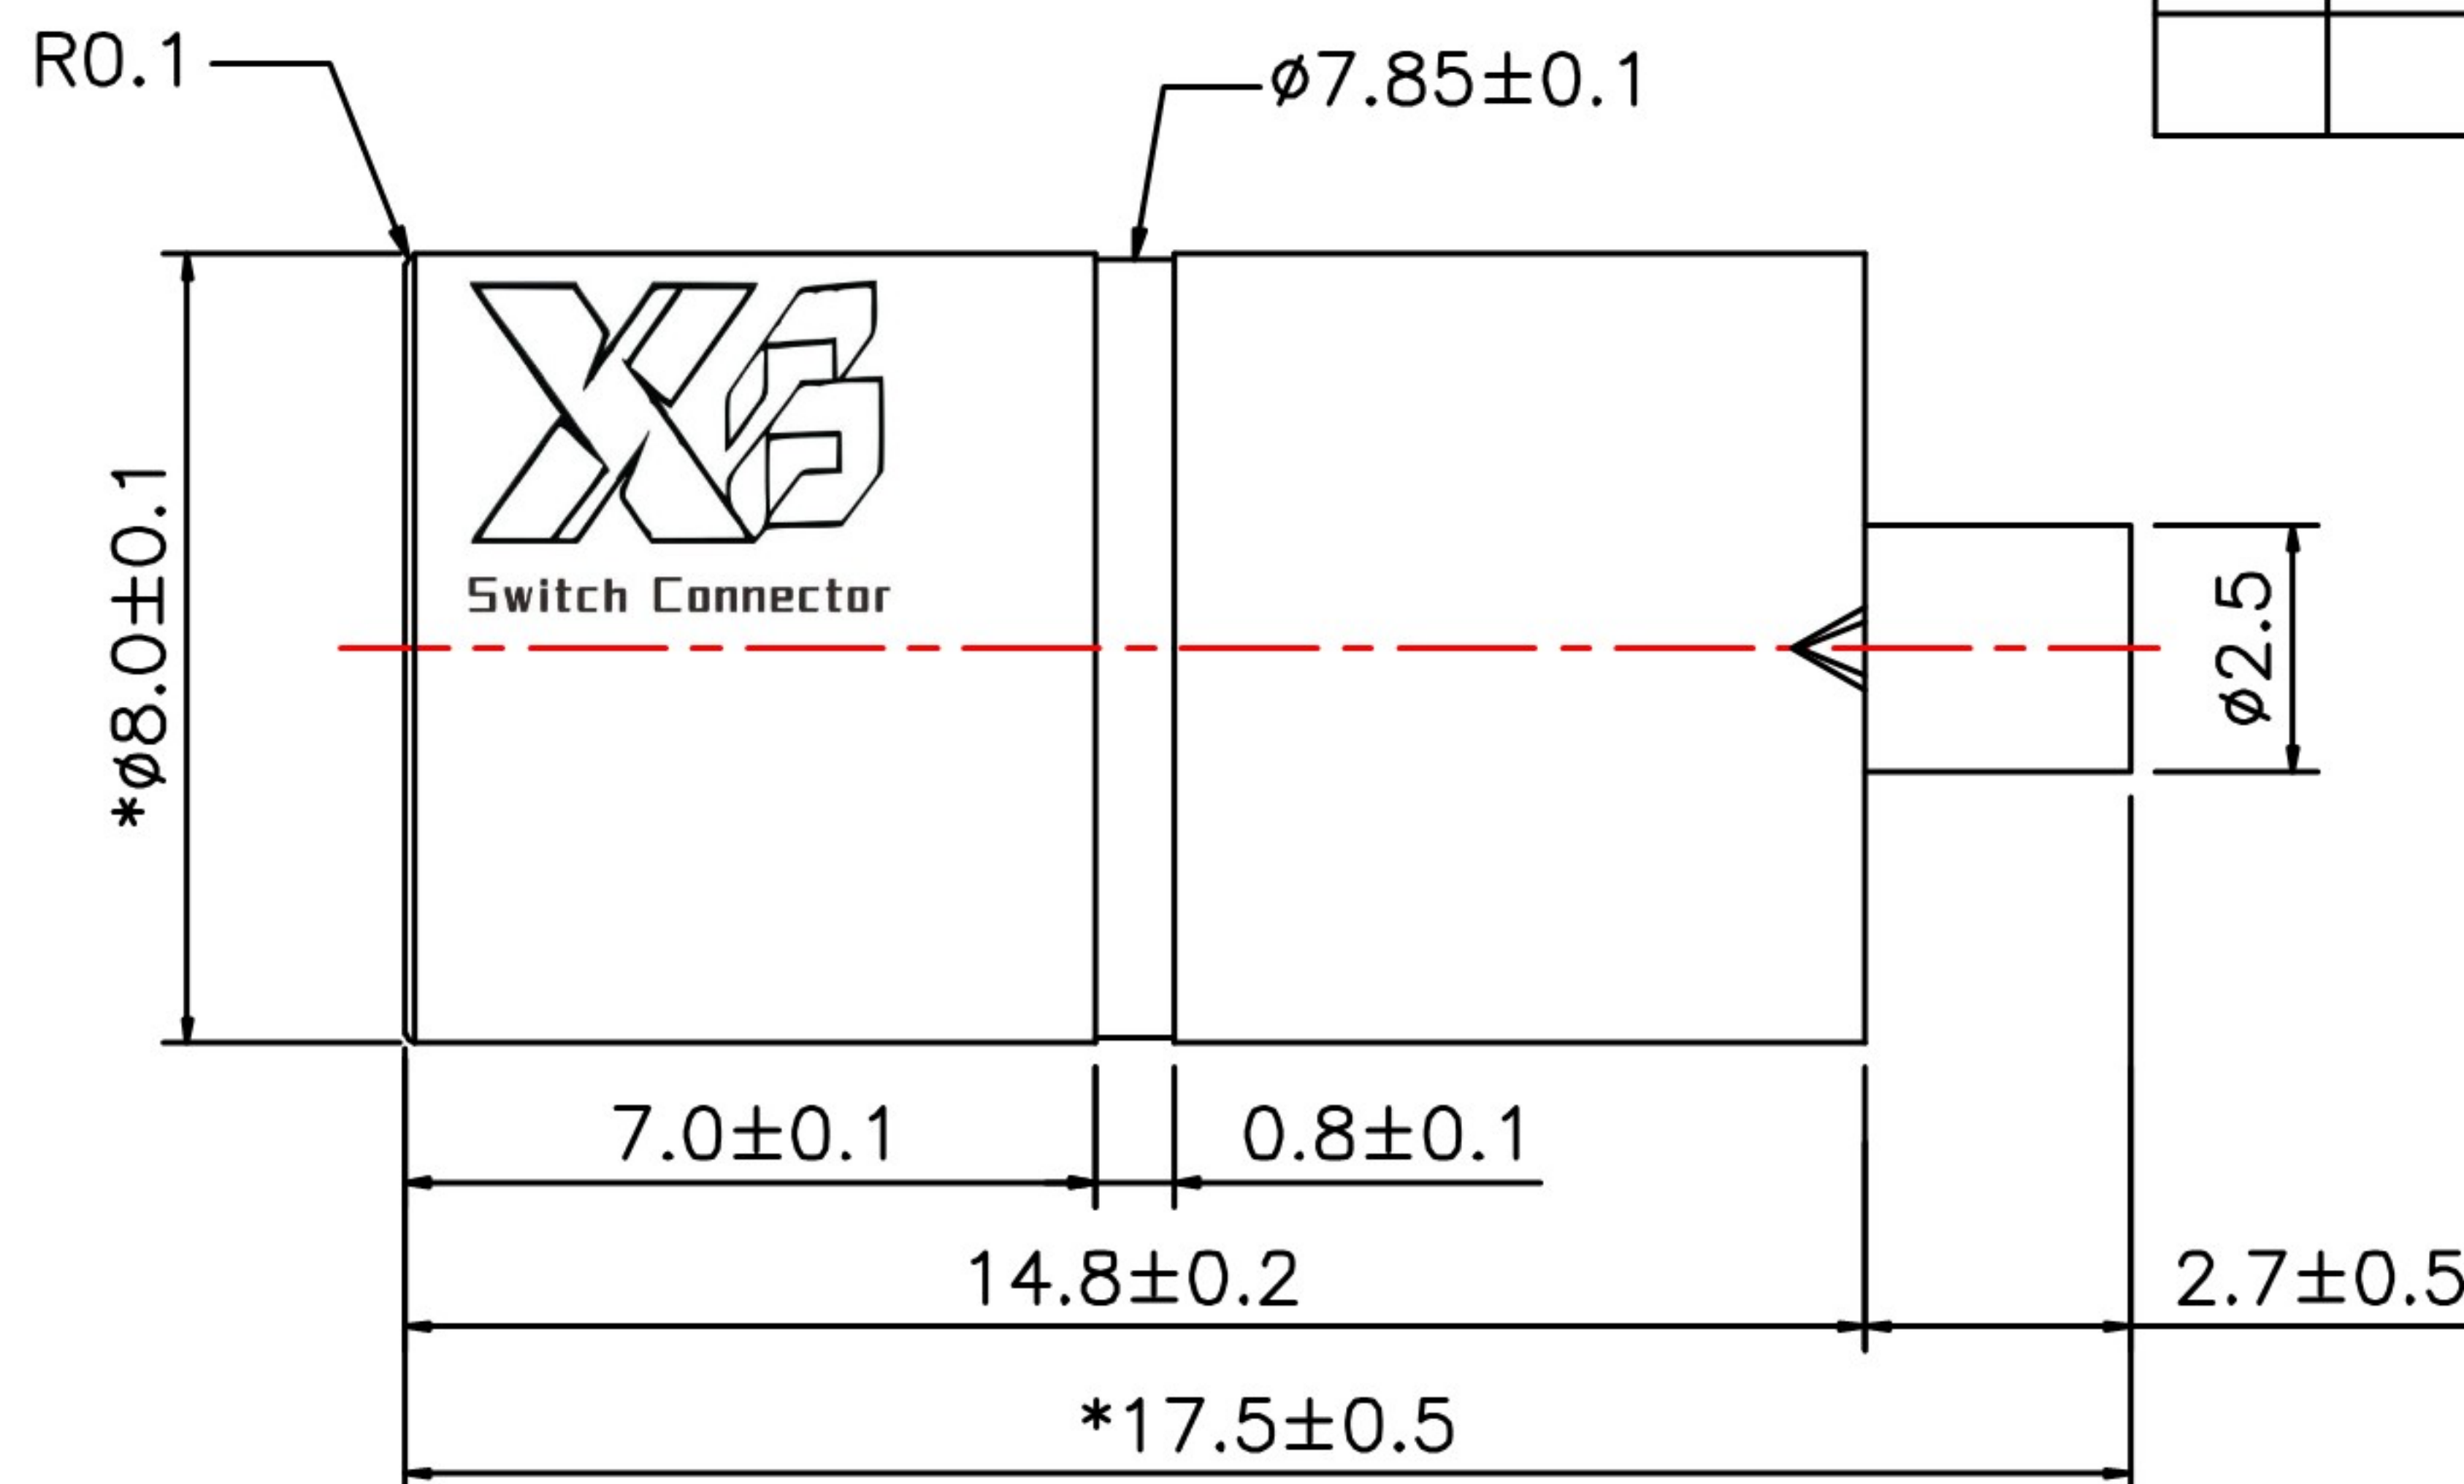

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3 x.x:±0.1 .xx:±0.05	6								
视图 Third angle projection			5				June	杨义邦	李莹峰	规格 DESCRIPTION:	DC JACK Ø5.5*Ø2.5*17.5
			4	8.0*14.8*5.6*7.7管	BRASS(C2680)	Ni 40~120μ				品名 P/N:	5525J80新款
			3	7.2*11磷铜弹圈	BRONZE(C5191)	Ni 40~120μ				图号 DRAWN NO:	CP-03-0024
2	2.5*16实心针		BRASS(H62)	Ni 40~120μ							
1	PLASTIC	PBT	BLACK								
			NO.	PART	MATERIAL	PLATING					