

A

B

C

D

E

F

G

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

A

2





C

D

F

F

G

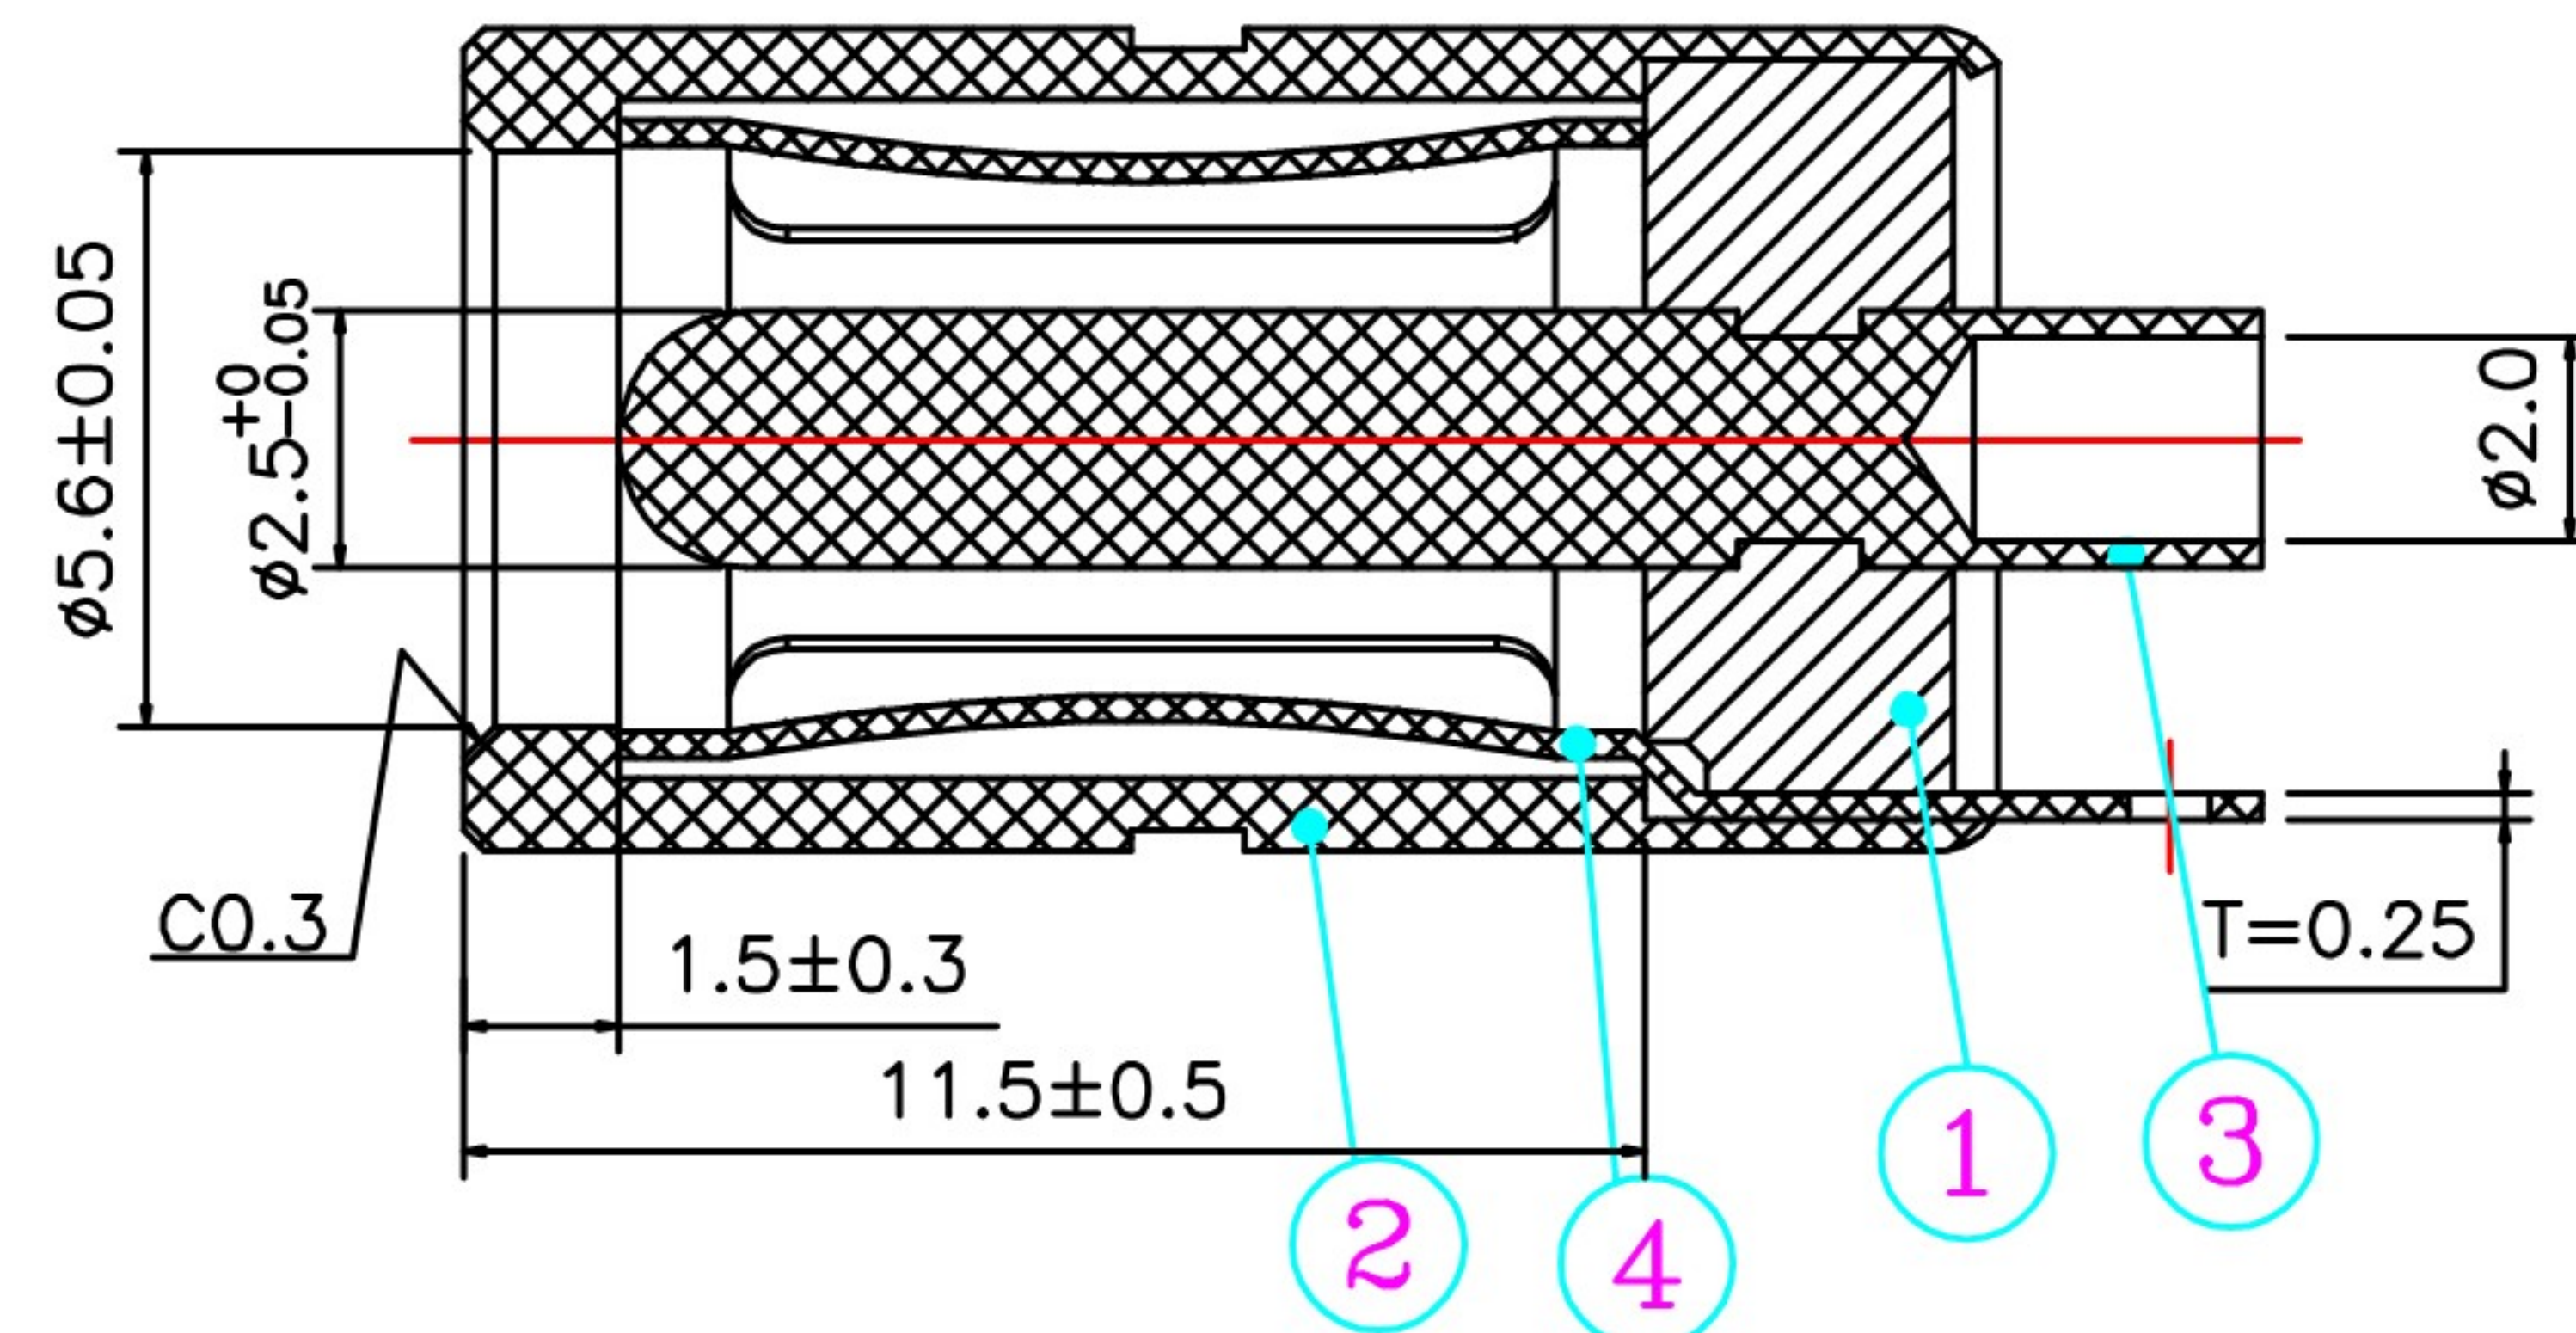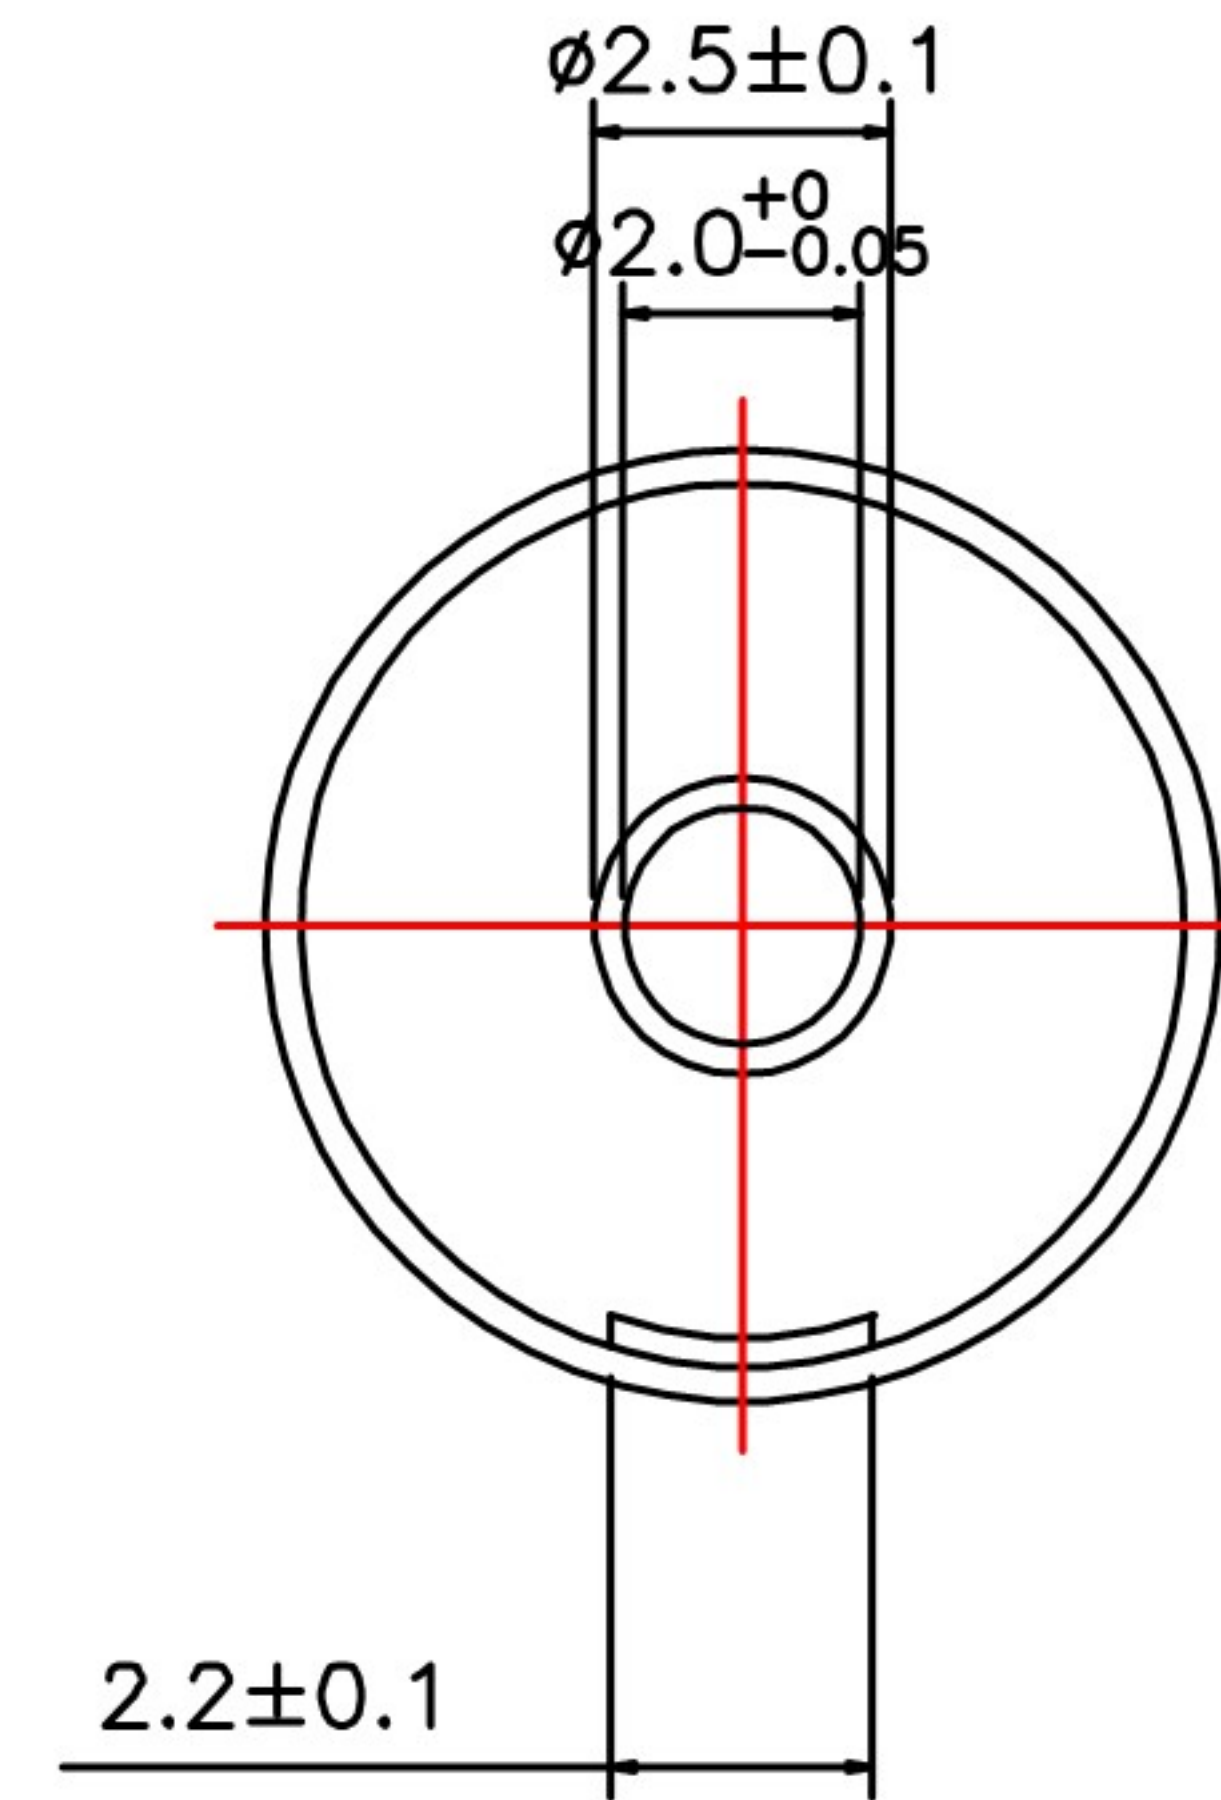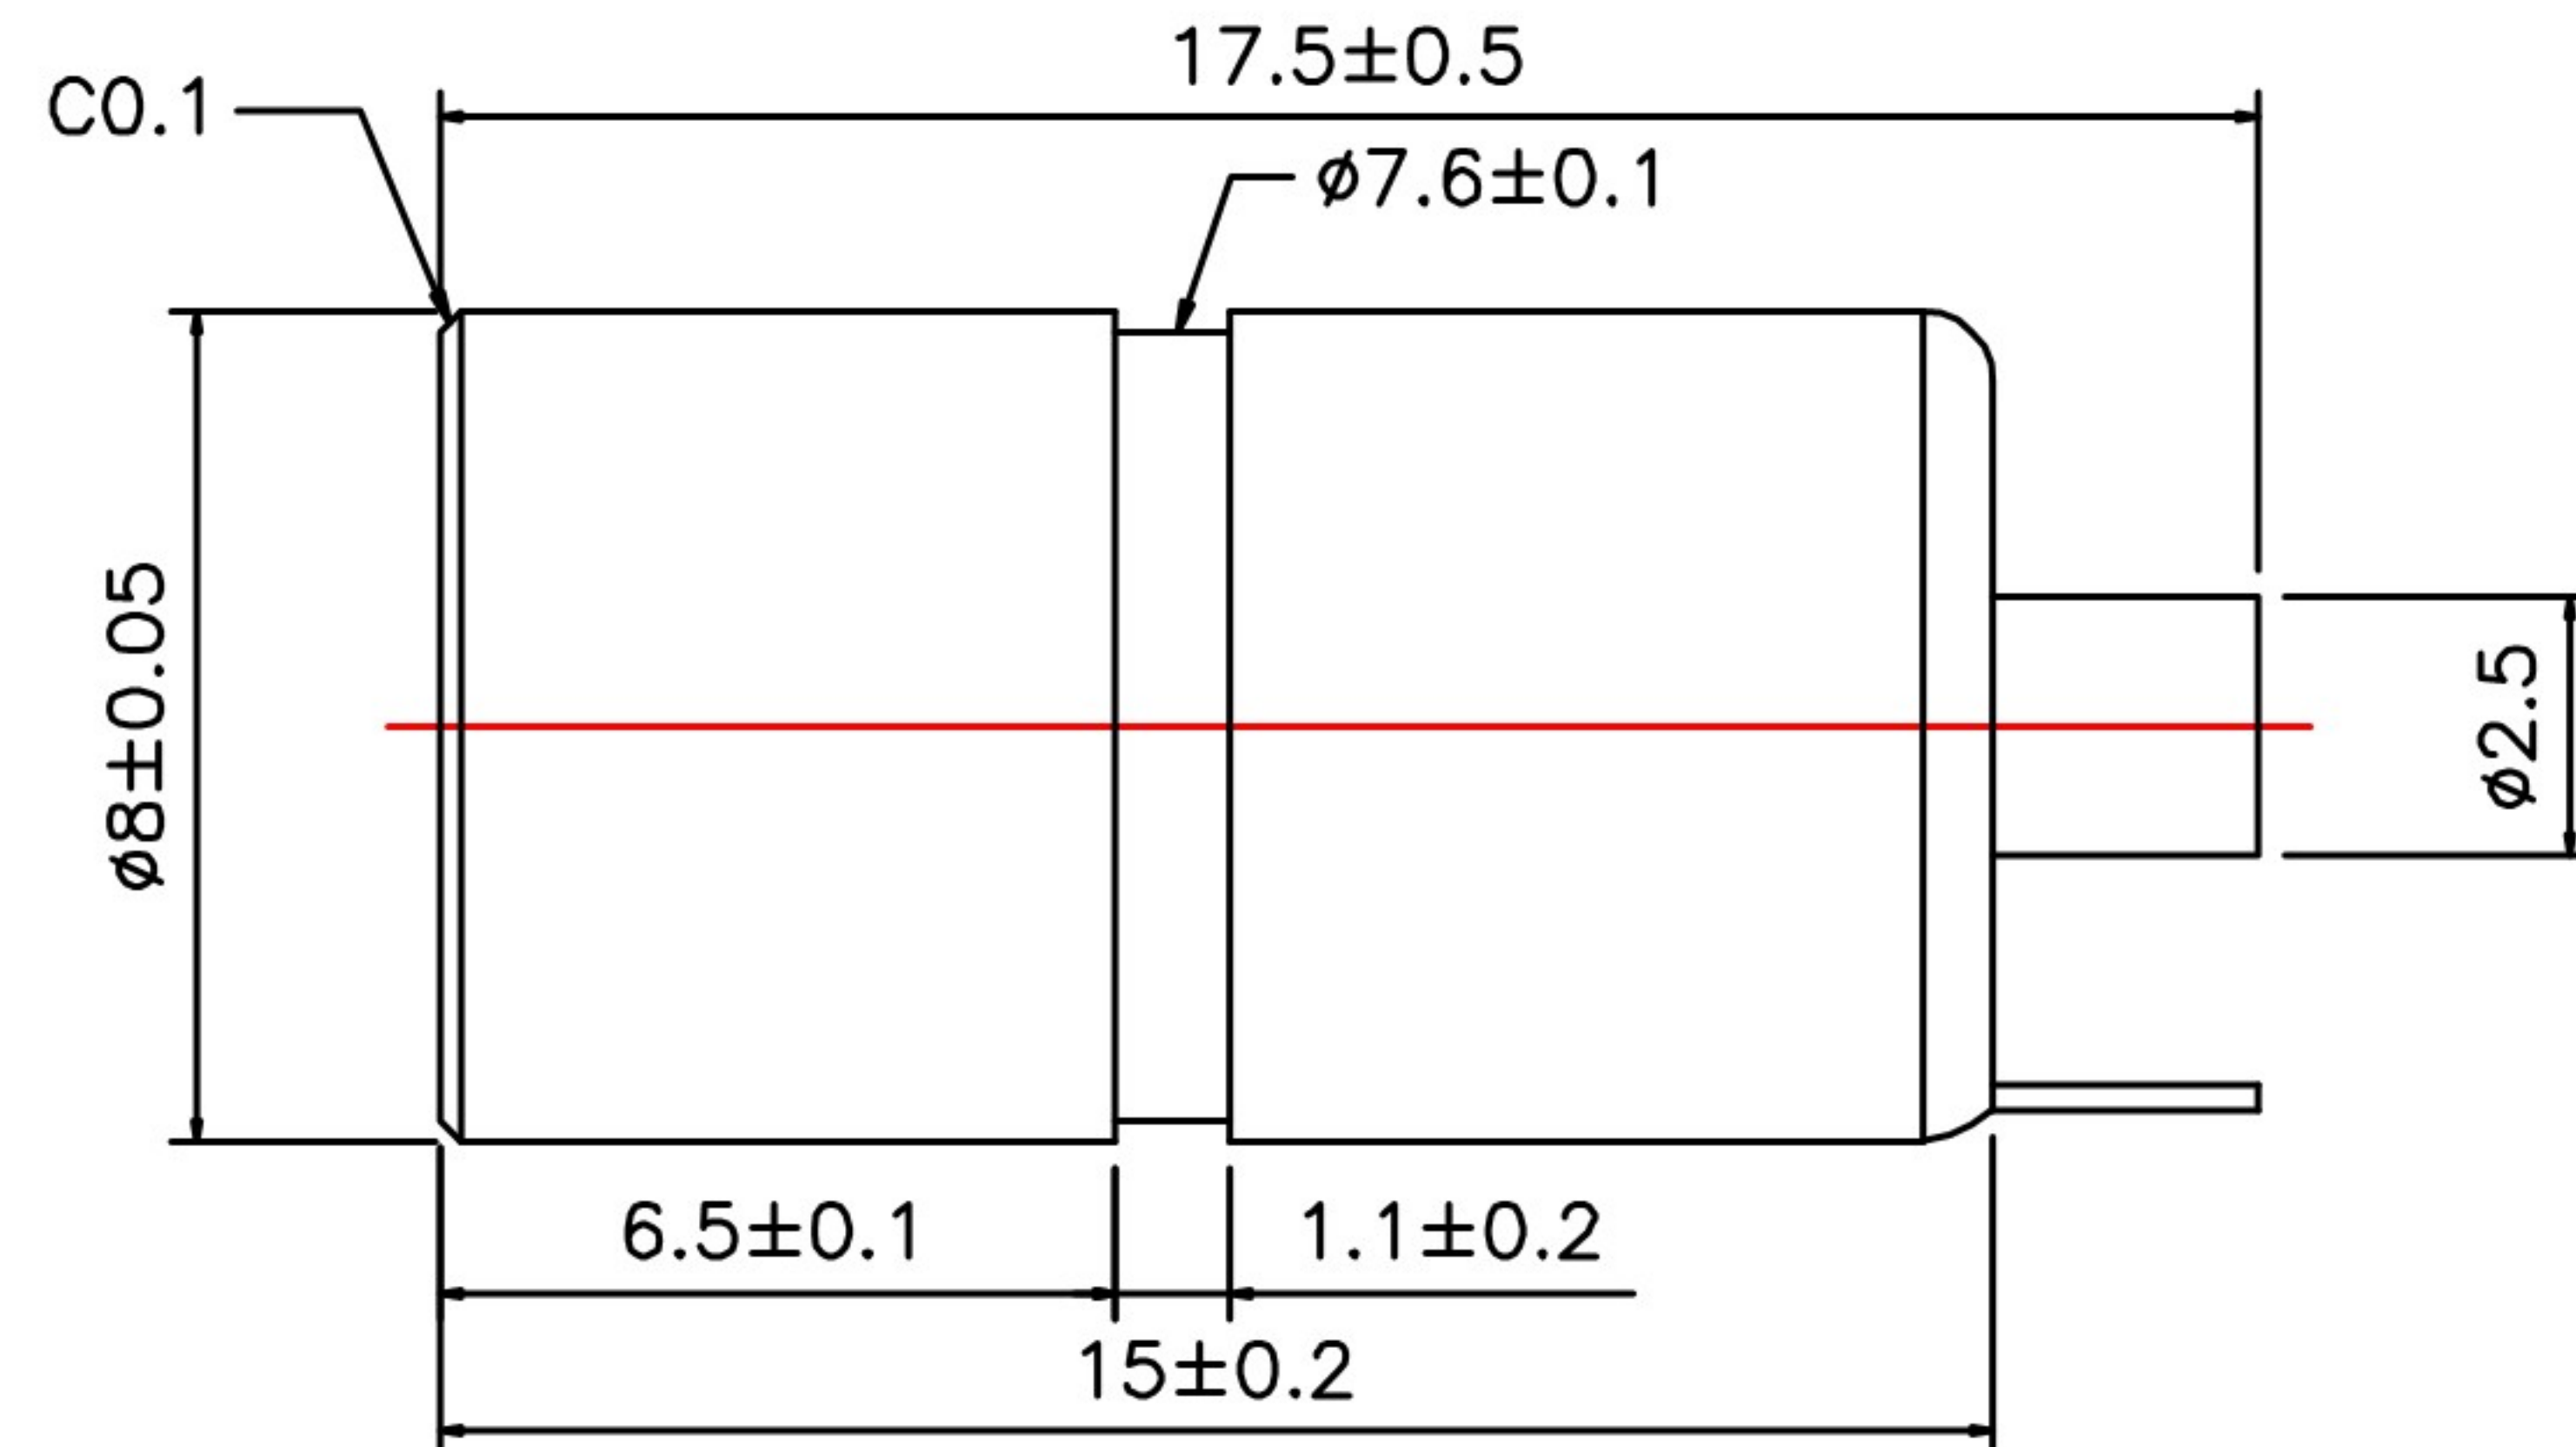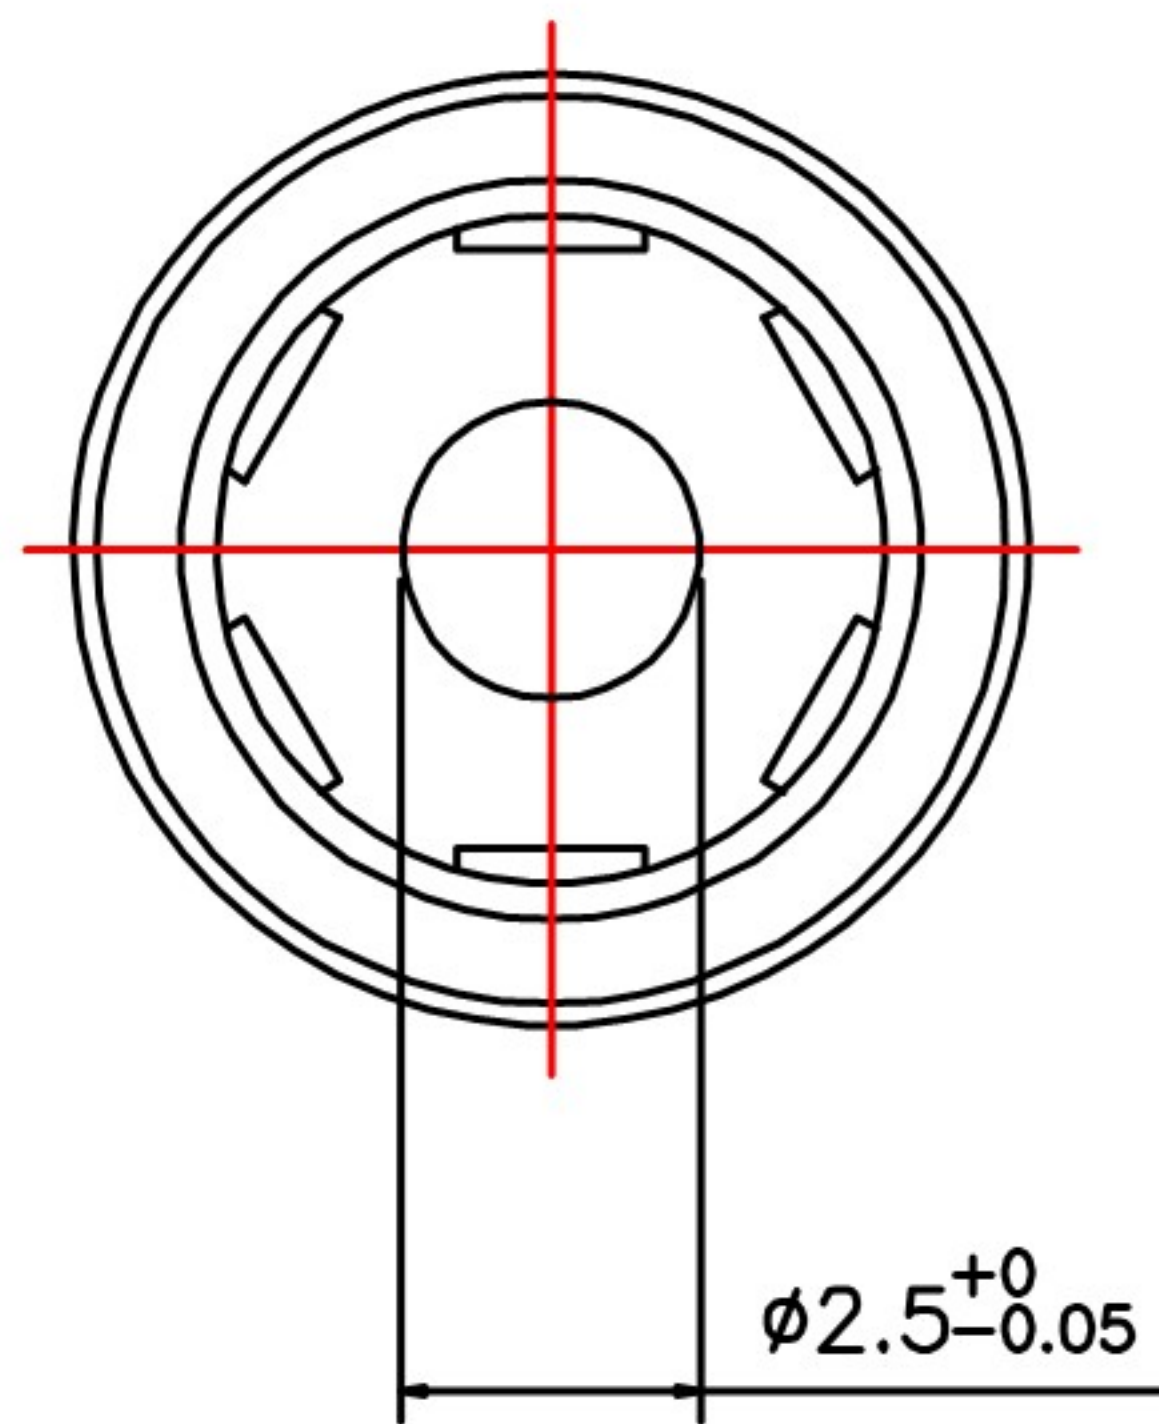

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3 x.x:±0.1 .xx:±0.05	6								June
视 图 Third angle projection			5				5521/5*6.6*0.25带尾弹圈 C5191 Ni 40~120μ 2.5*16实芯针 C3604 Ni 40~120μ 8*15*6.6管 C3604 Ni 40~120μ				
			4					PLASTIC PBT+G15BK-V0 BLACK NO. PART MATERIAL PLATING			
			3								
			2								
		1									

规 格	DESCRIPTION:	DC JACK ø5.5*ø2.5*17.5
品 名	P/N:	5525JL80
图 号	DRAWN NO:	CP-03-0093

1

2

(4)

4

5

6

7

8

9