
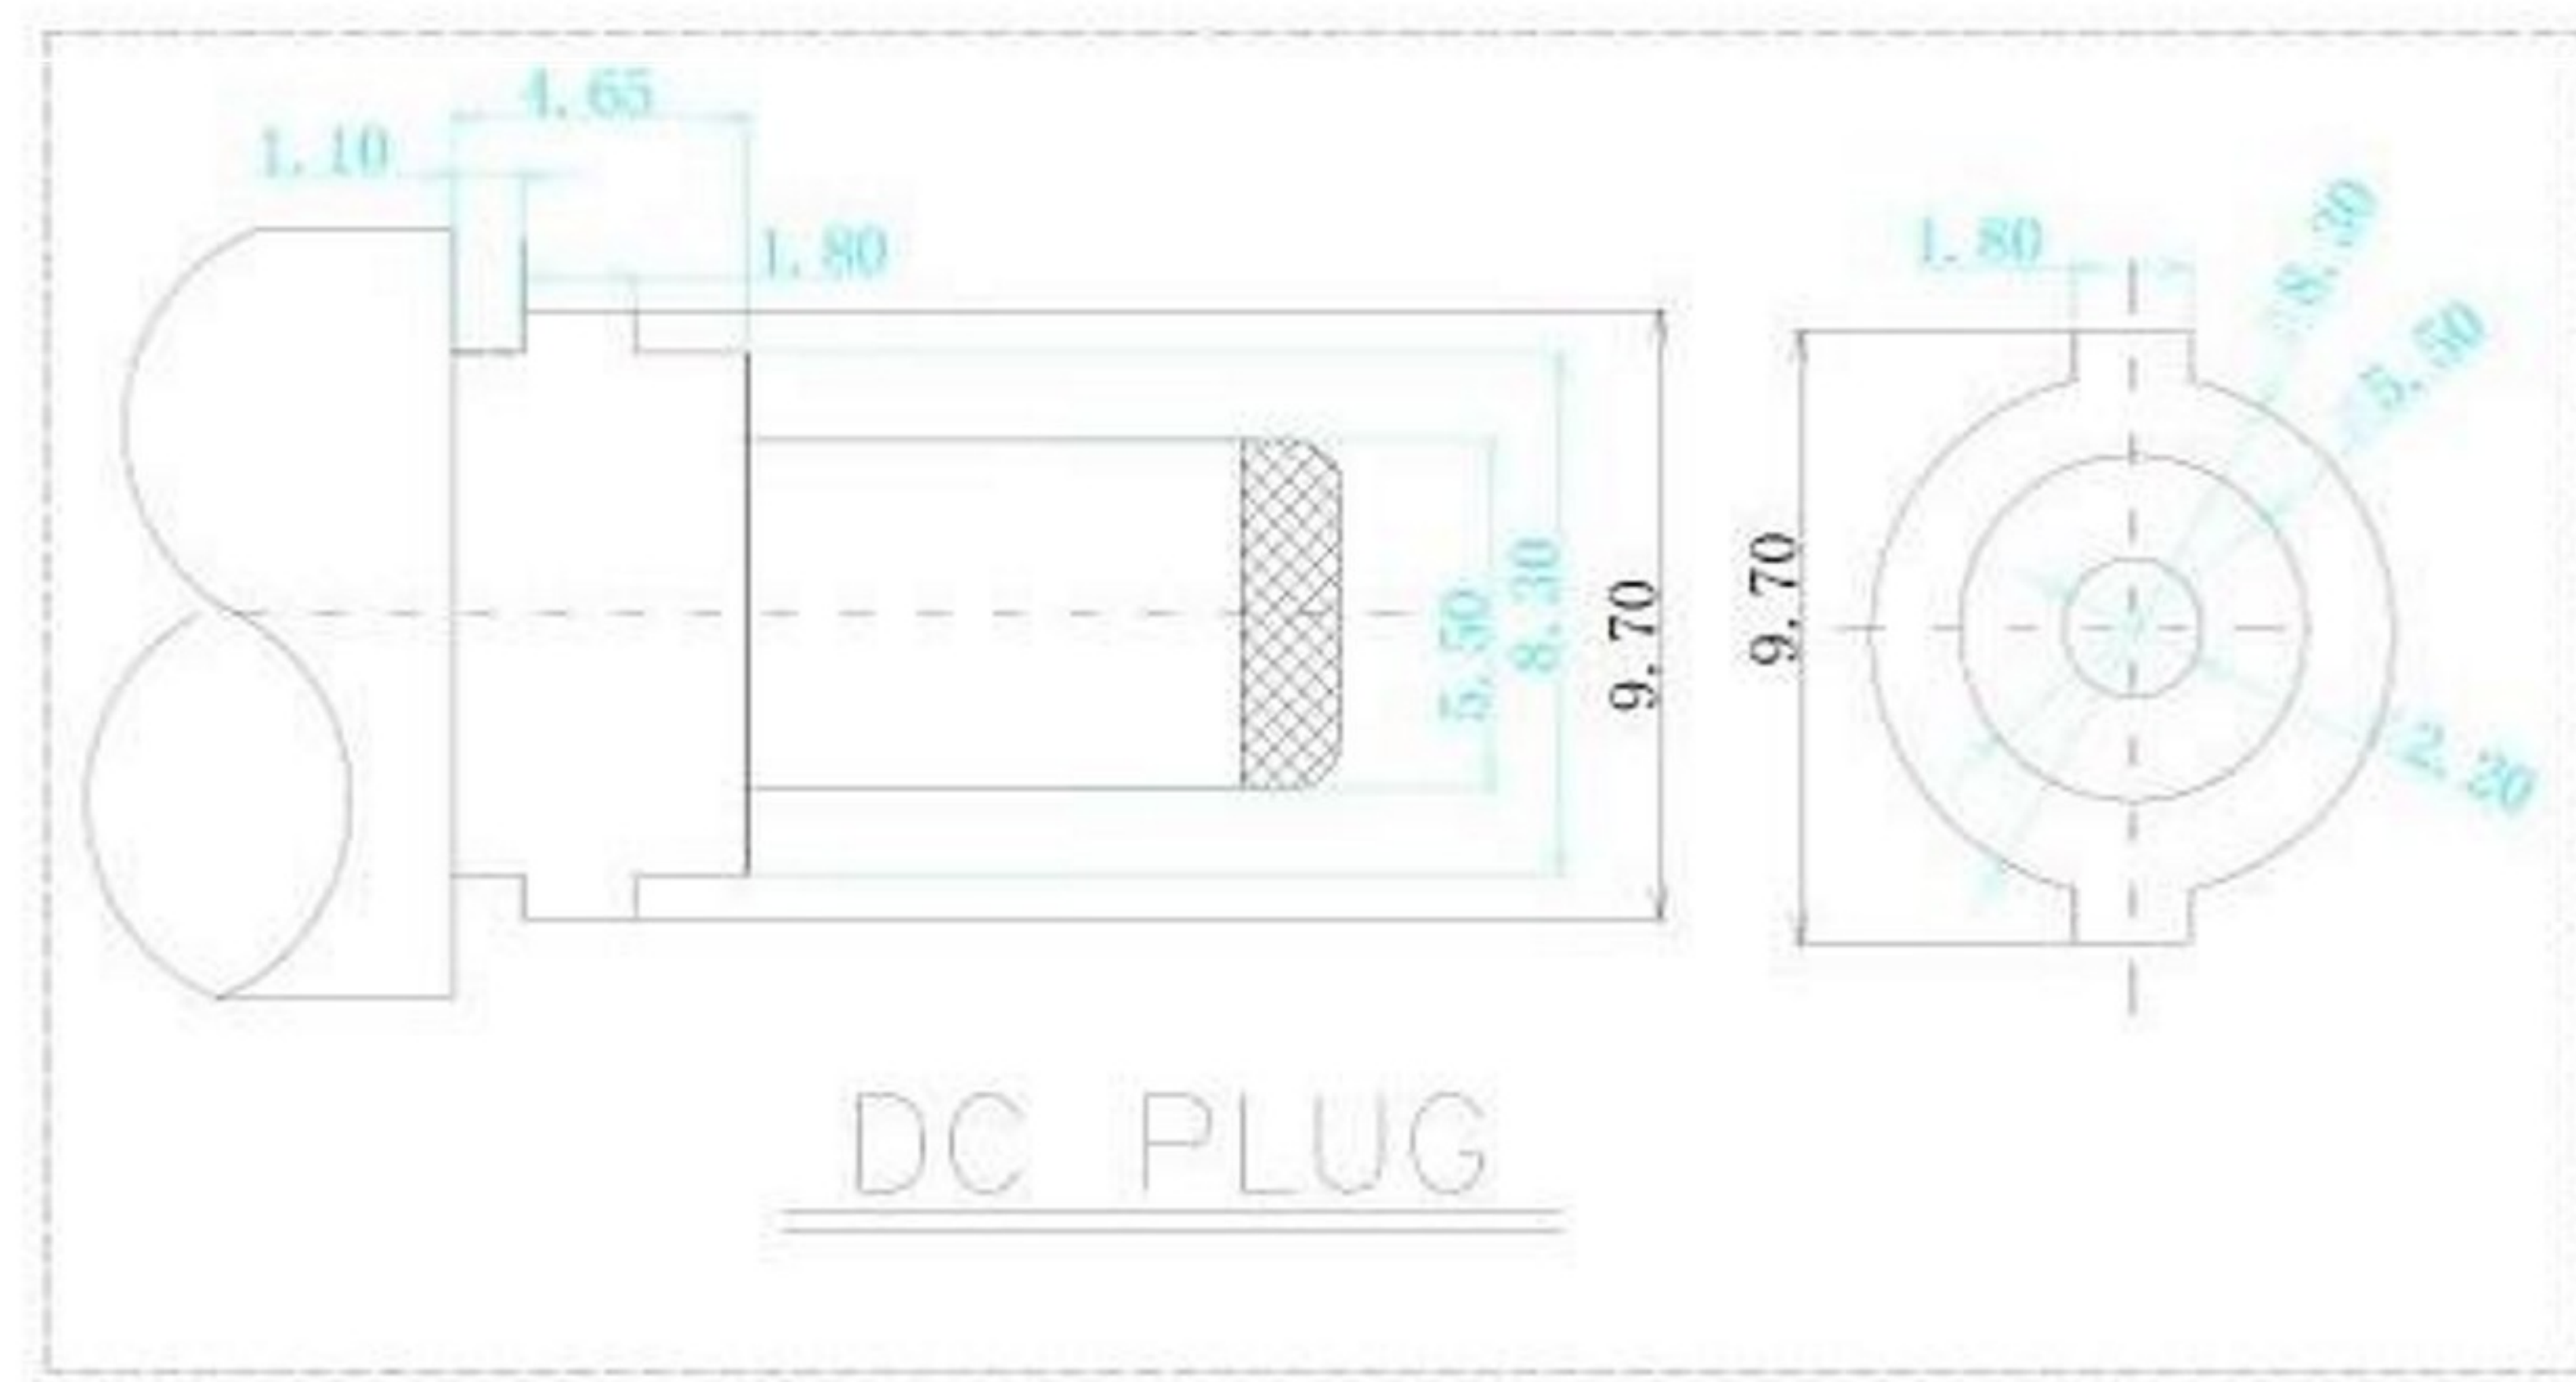
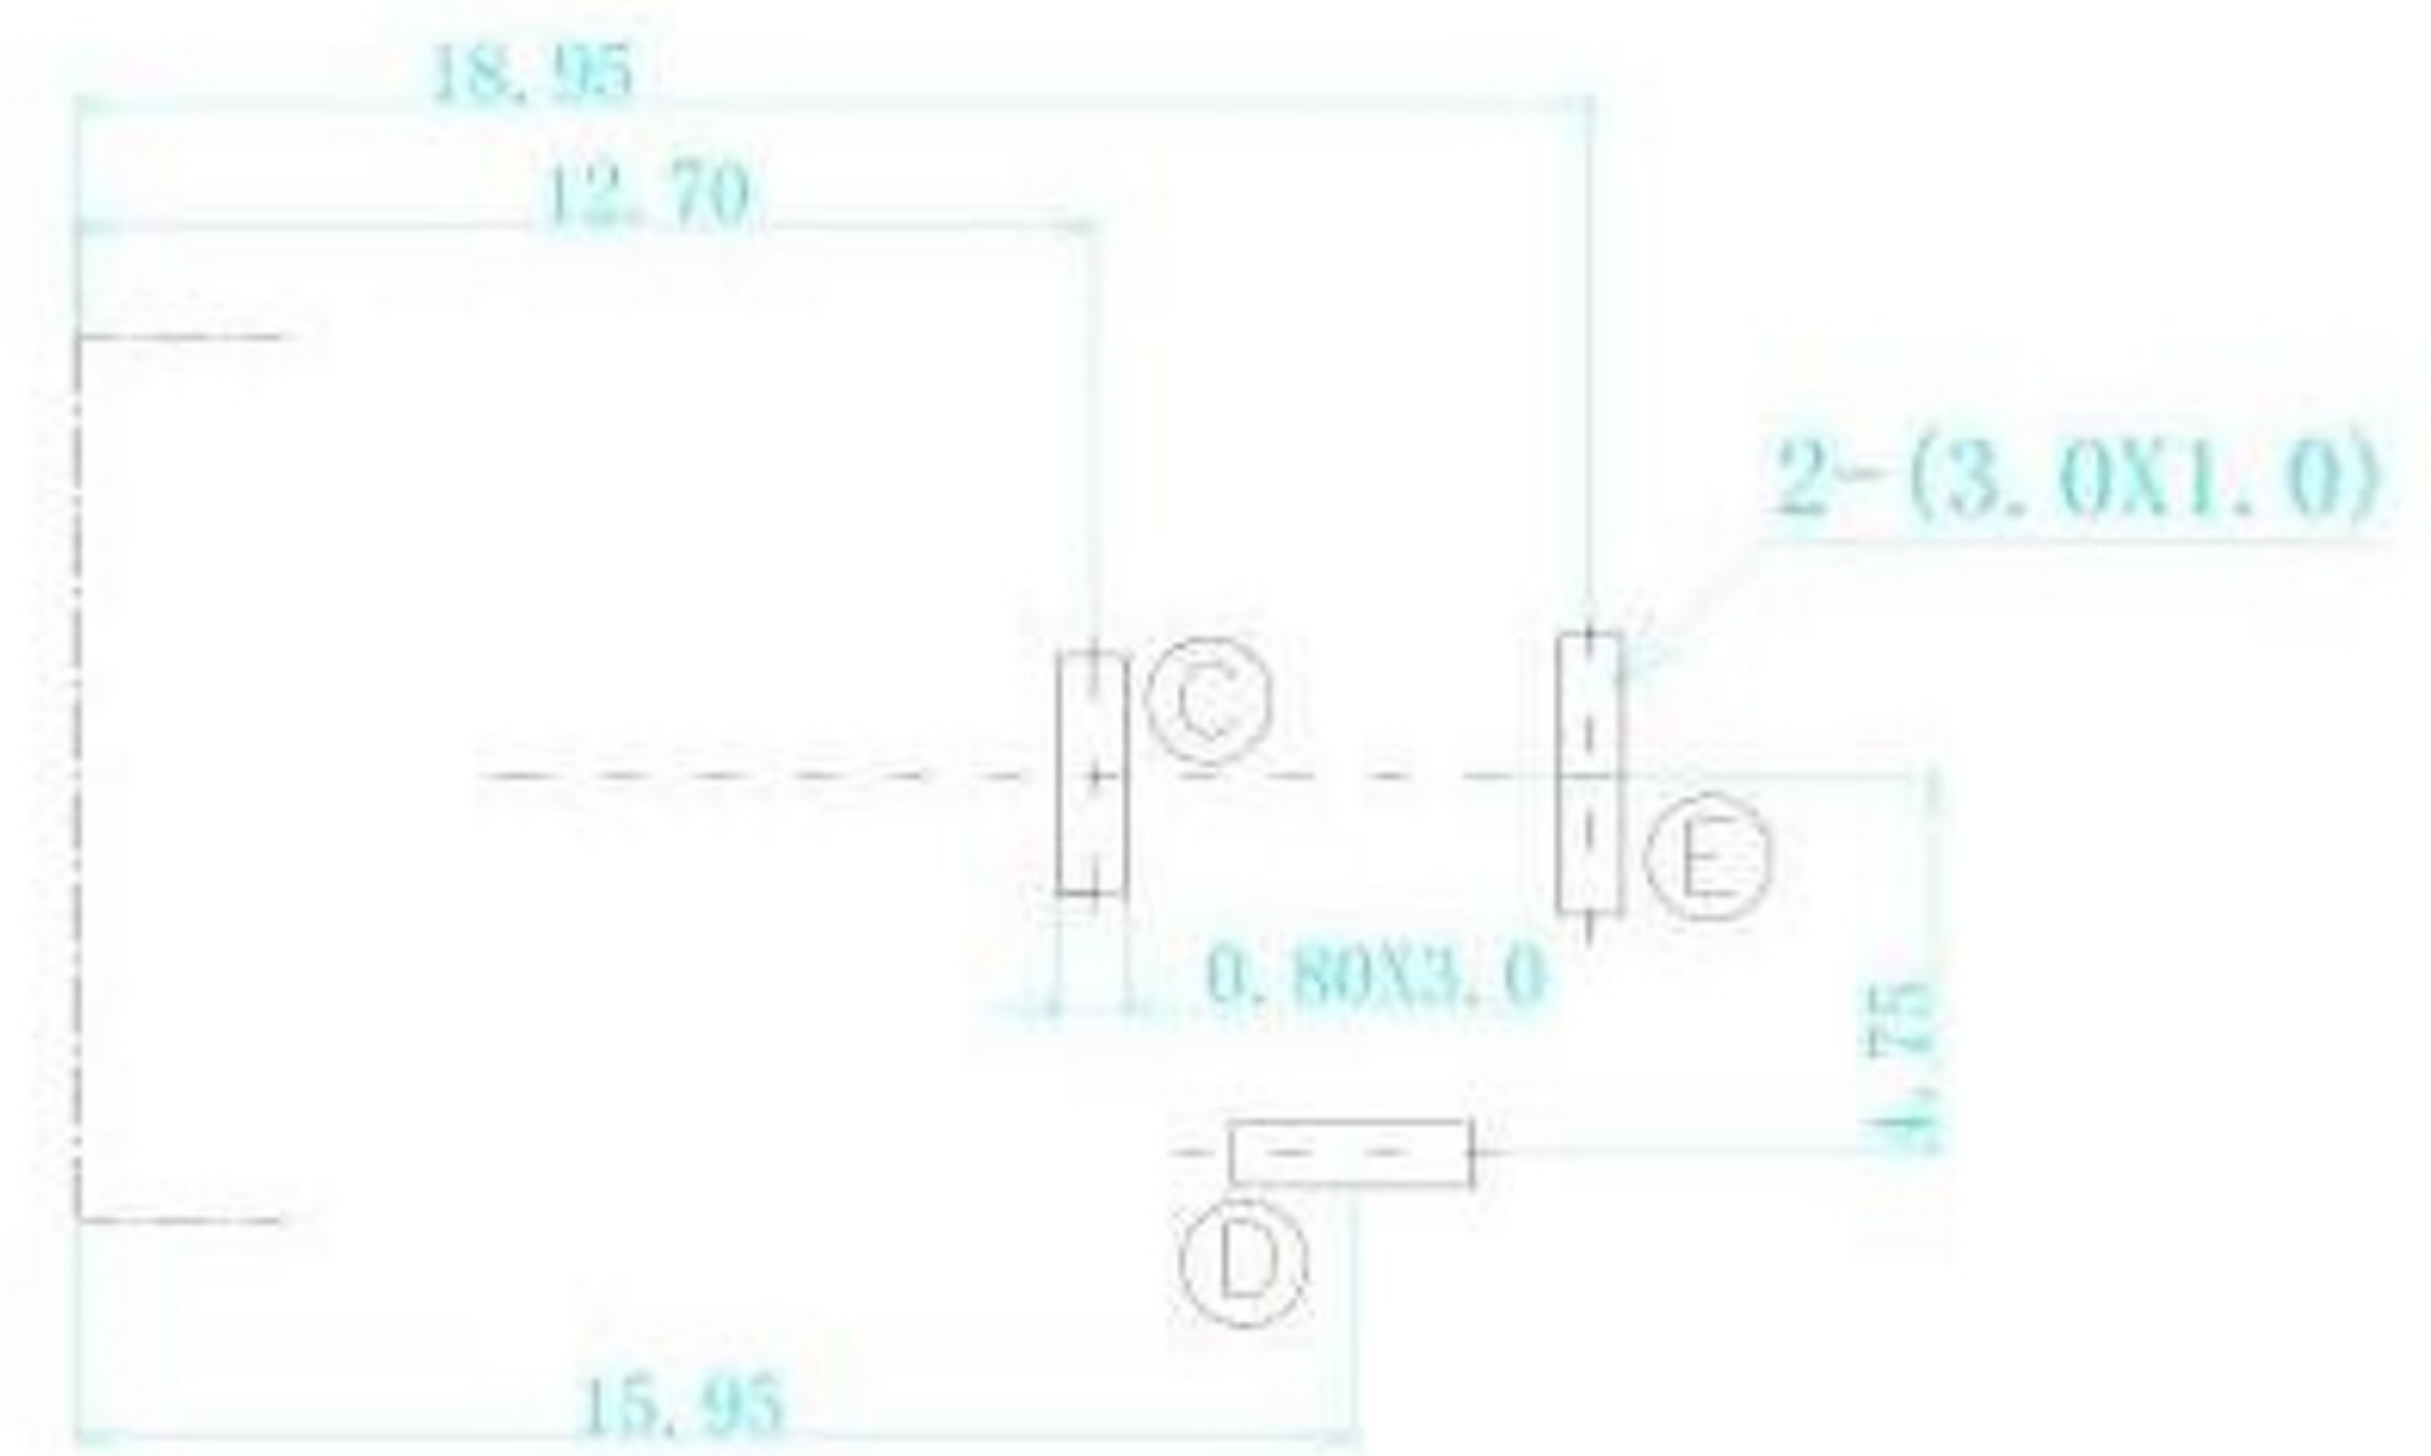
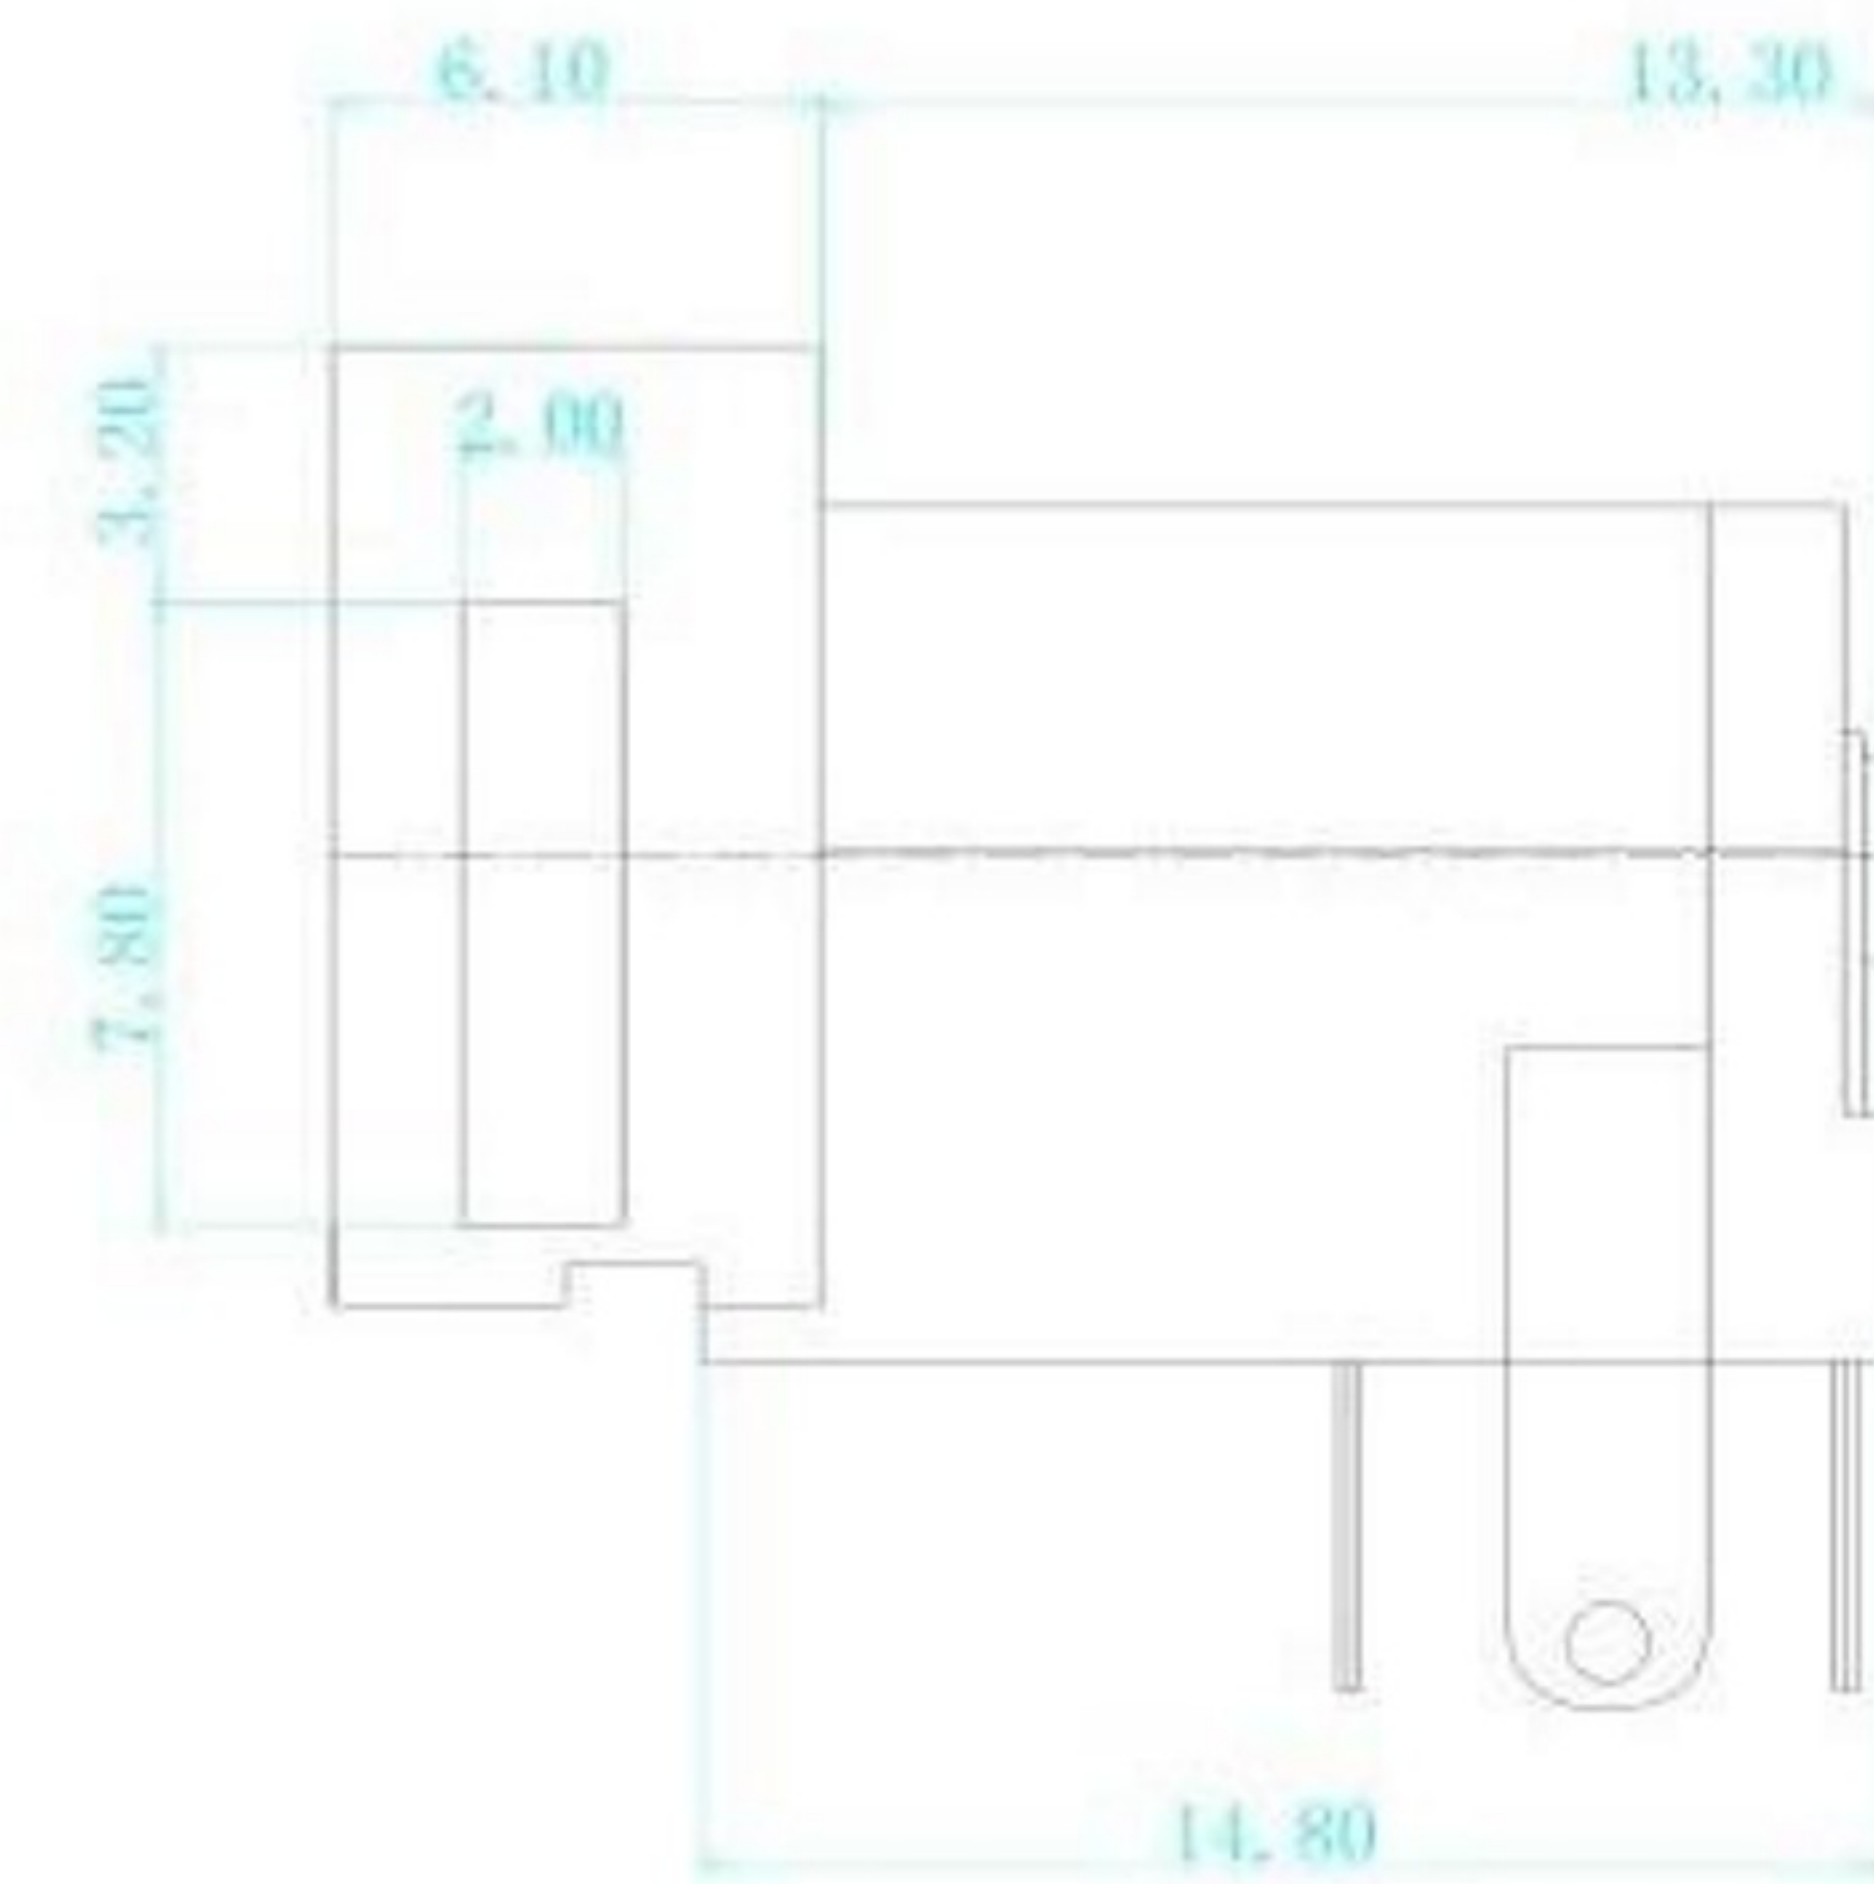
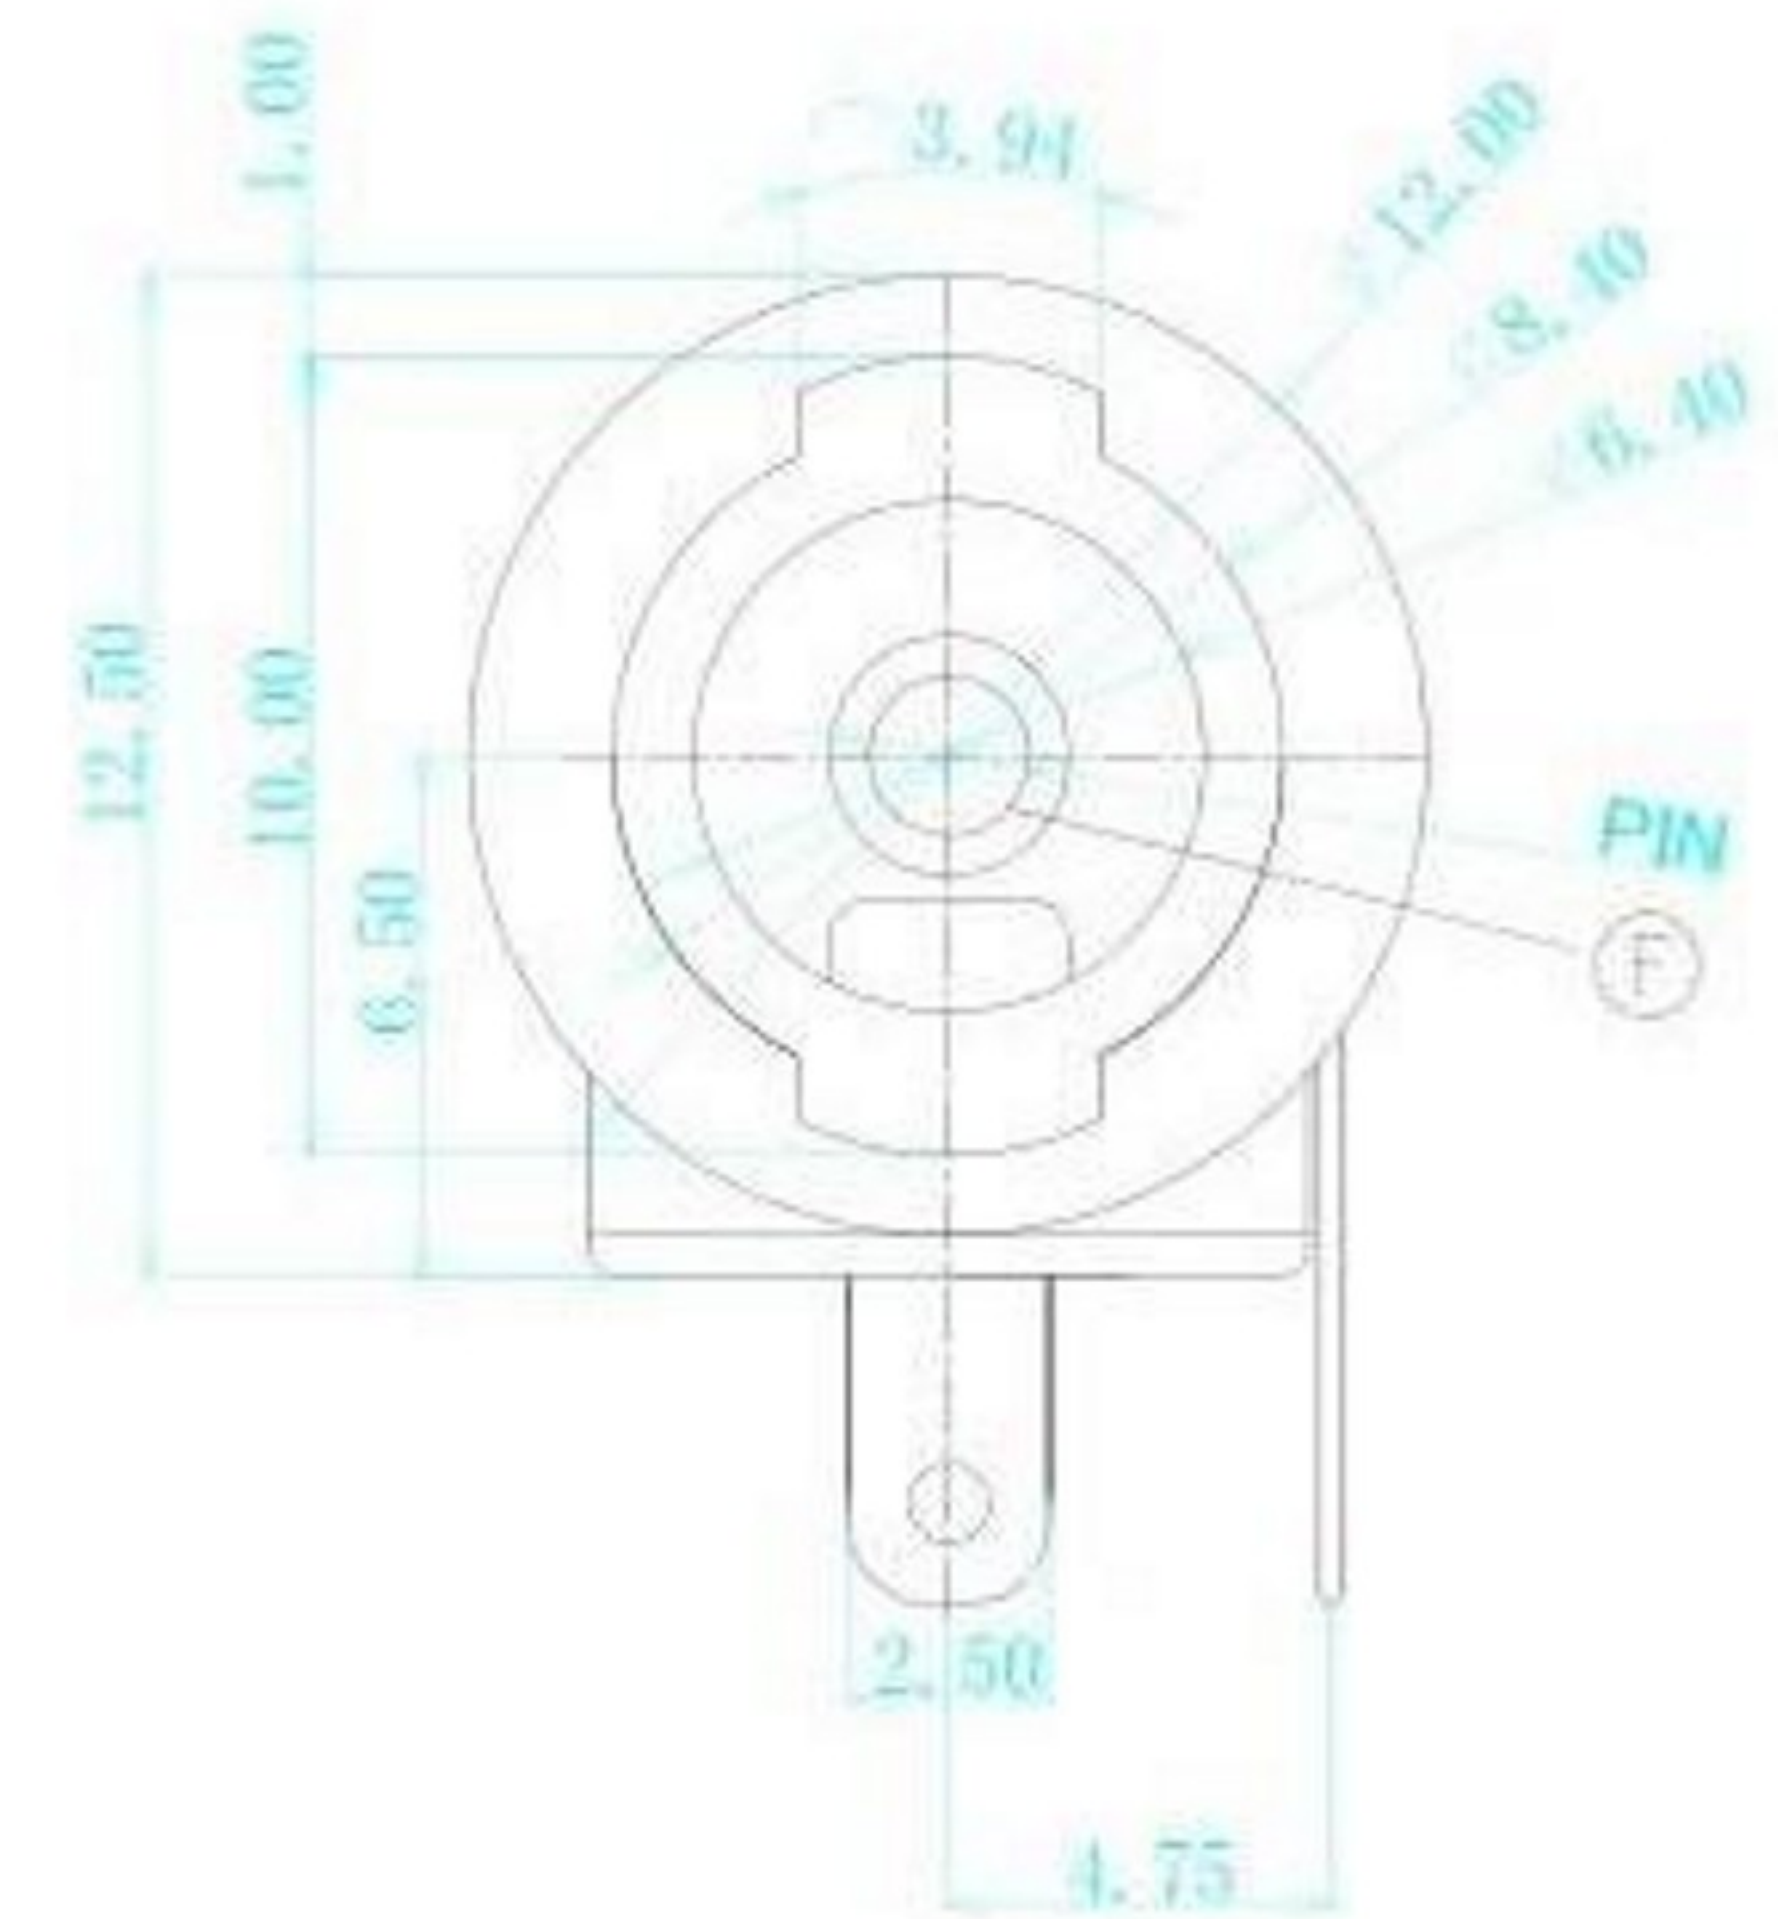



REVISIONS			
REV.	LTR	DESCRIPTION	DATE

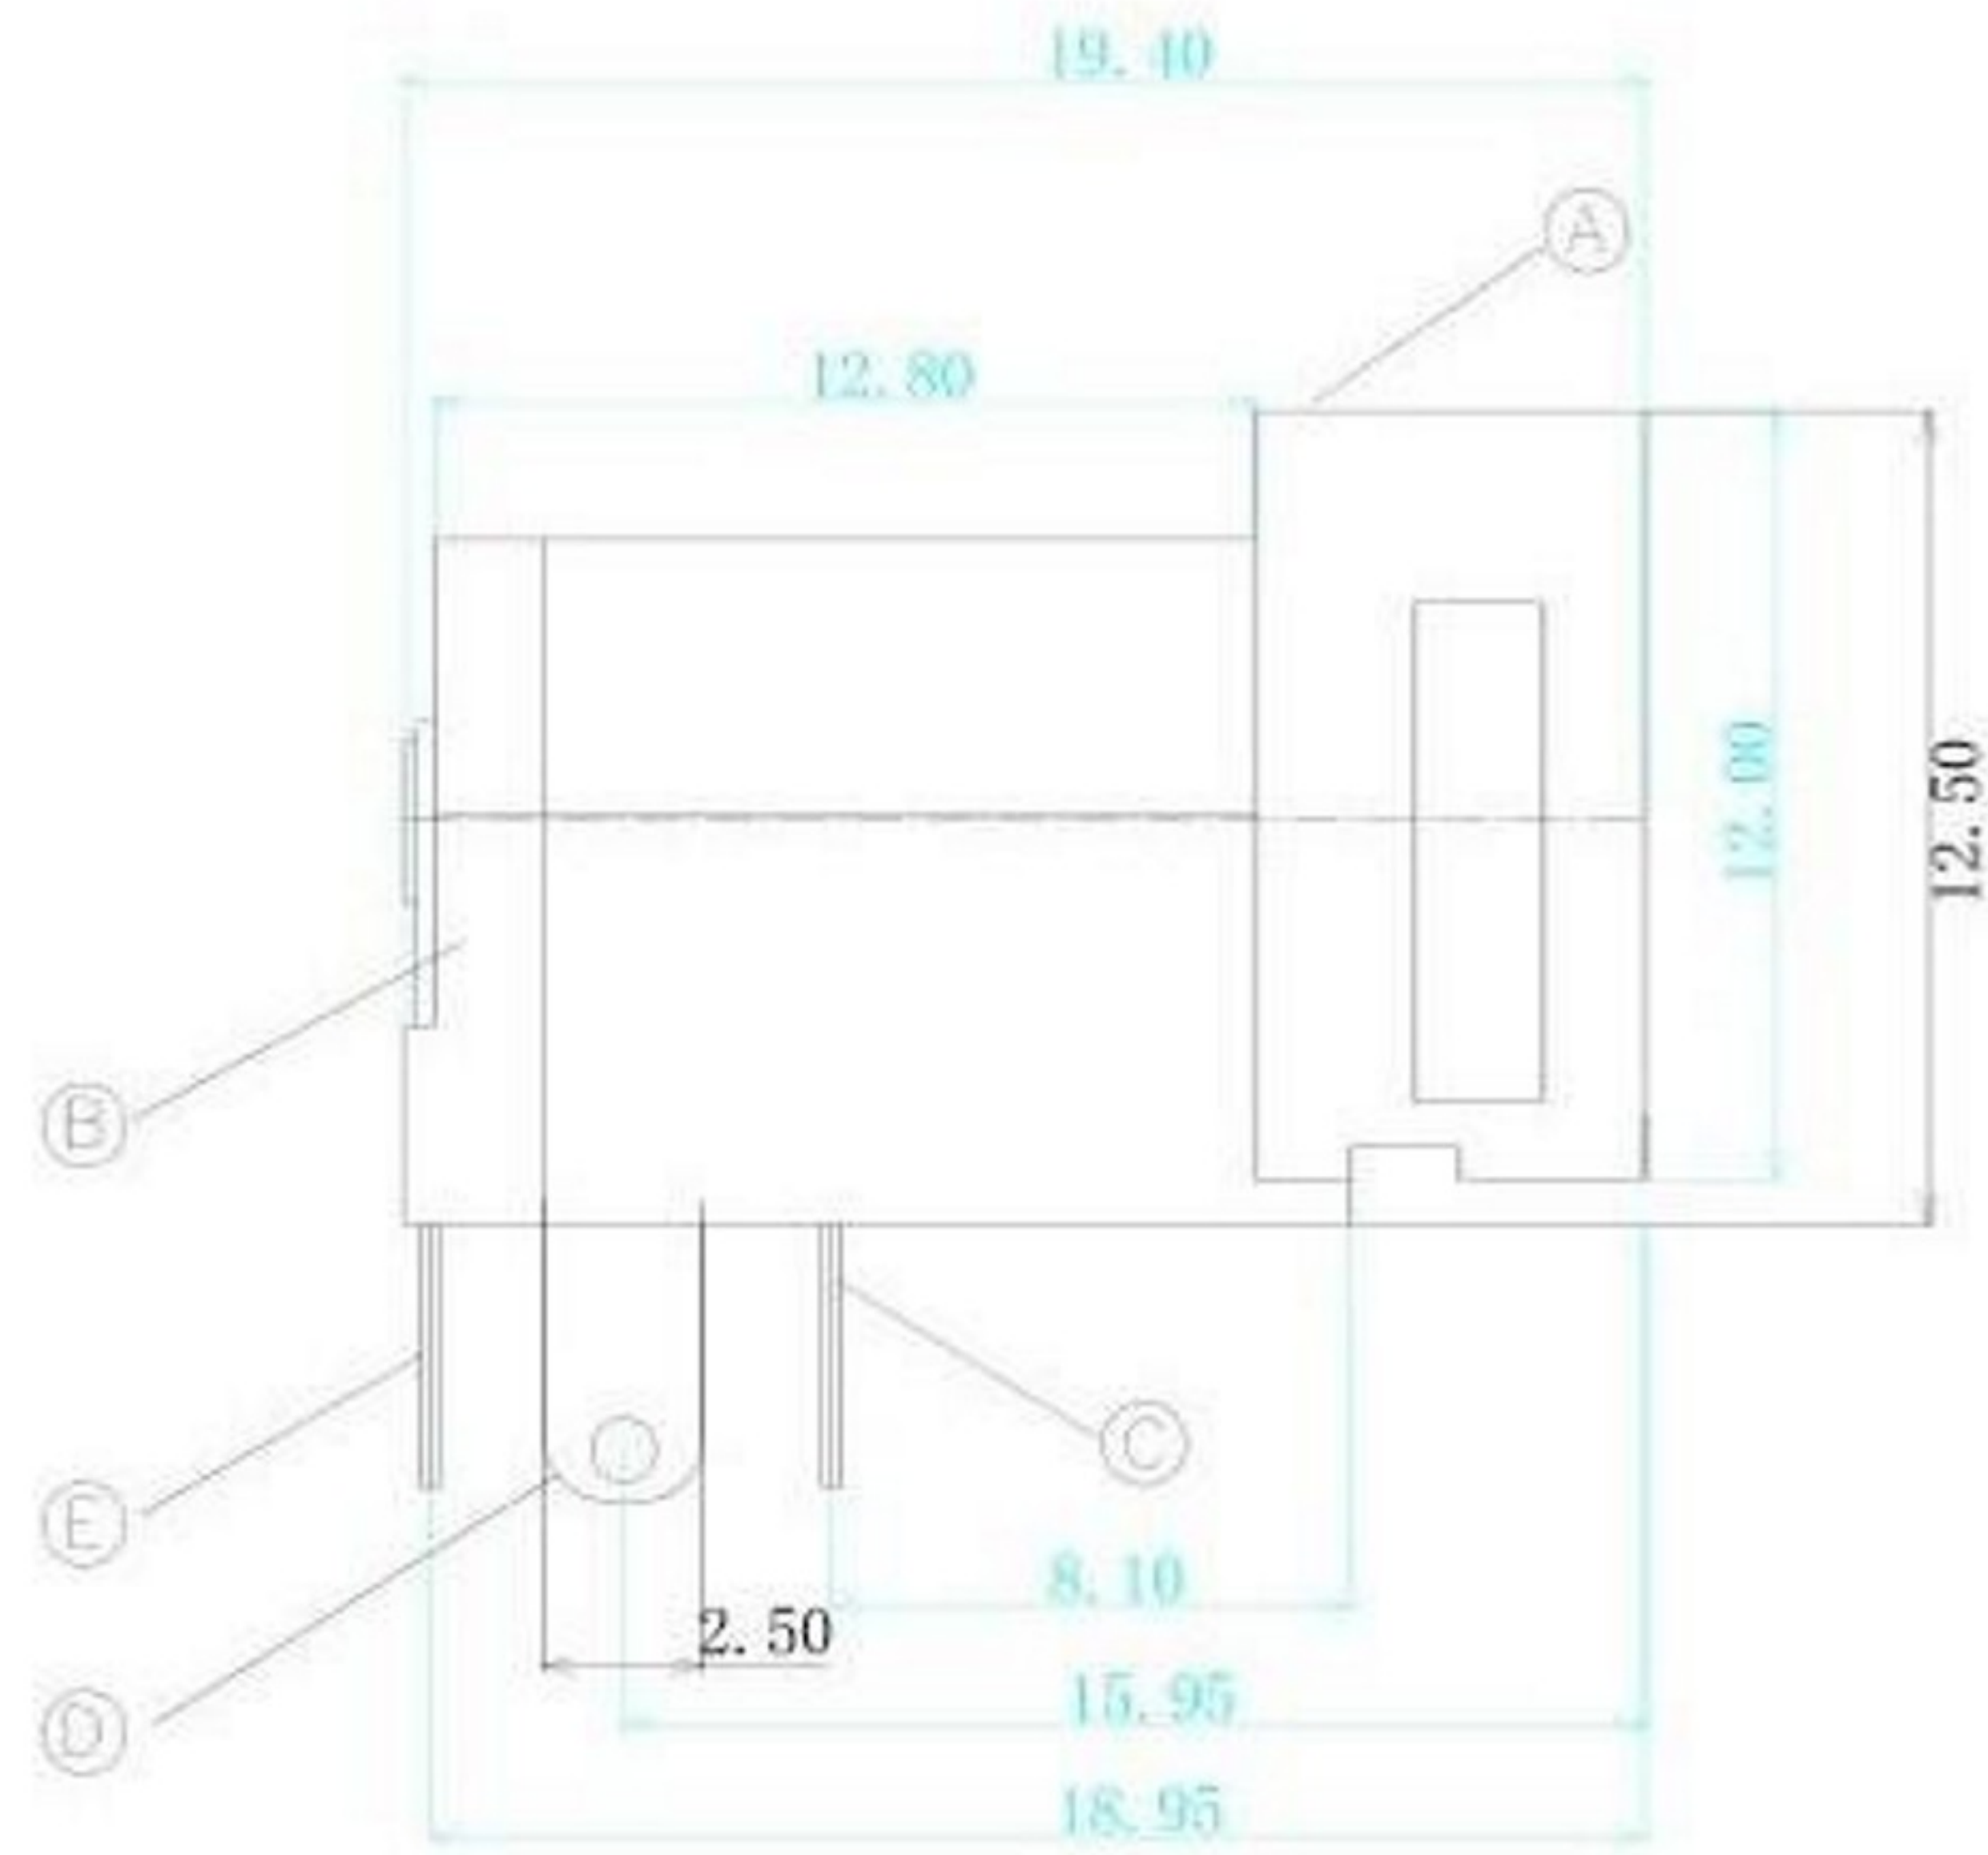

- NOTES:
1. CONTACT CURRENT RATING: 12V 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 1000Ω MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 3.00Kgf MAX.;
 7. CONNECTOR UNMATING FORCES: 0.30Kgf MIN.;

TABLE A:

ITEM	PART NO.
TYPE 1	CENTER PIN 1.65
TYPE 2	CENTER PIN 2.00
TYPE 3	
TYPE 4	CENTER PIN 2.50

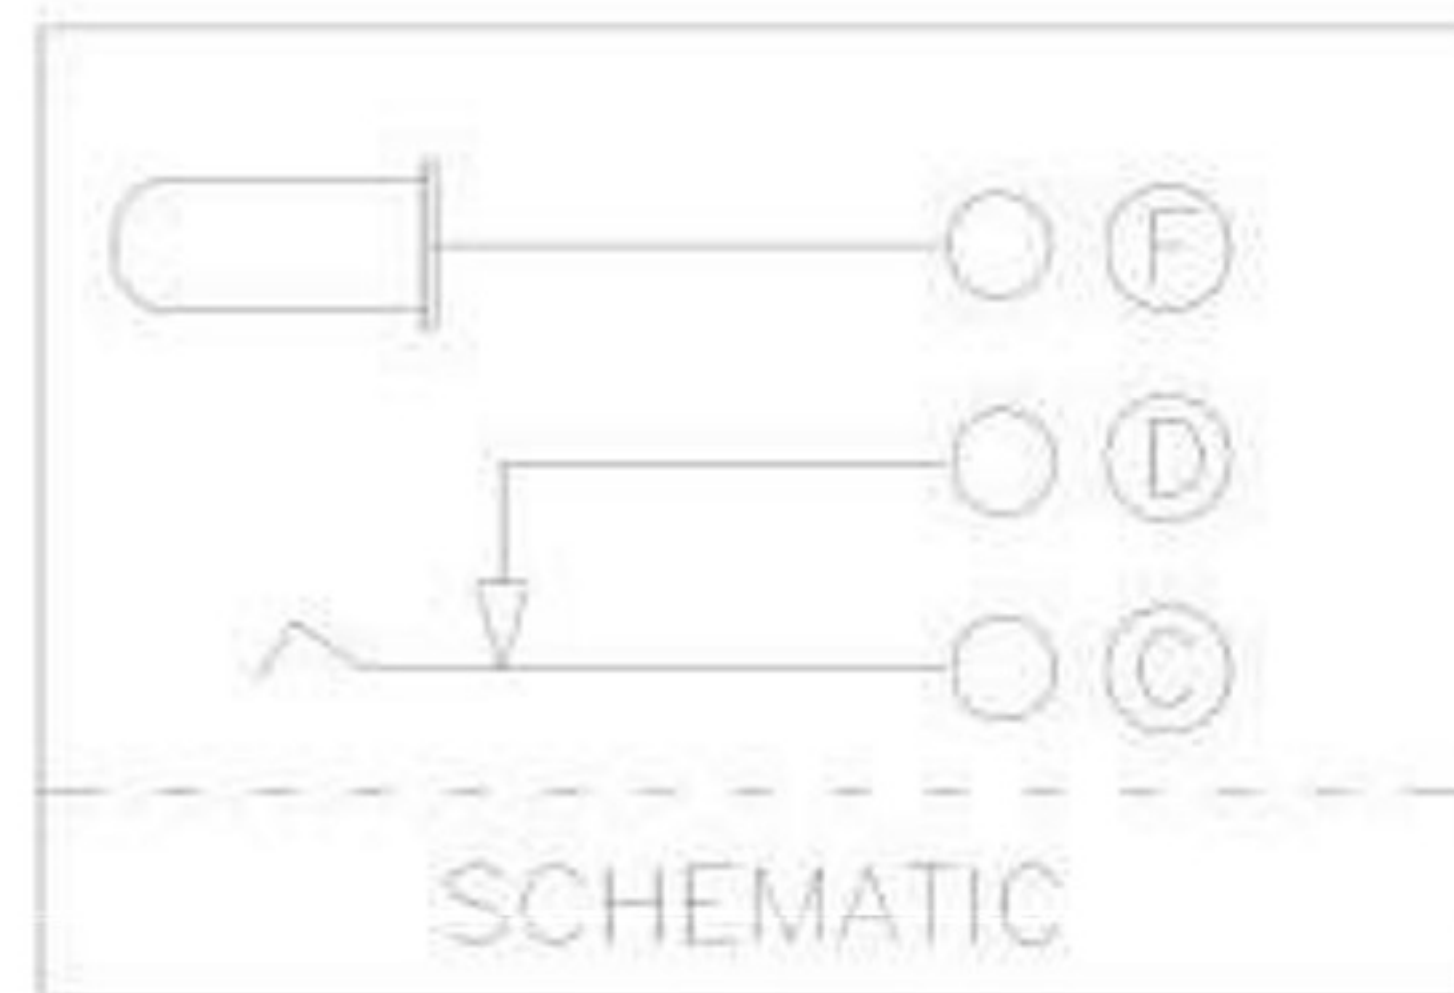

ITEM	DESCRIPTIONs	MATERIAL	PLATING	Q'TY	NOTE
F	CENTER PIN	BRASS	Ni50~120u"	1	
E	CONTACT 3	COPPER ALLOY	CuSn	1	
D	CONTACT 2	COPPER ALLOY	CuSn	1	
C	CONTACT 1	COPPER ALLOY	CuSn	1	
B	COVER	PBT		1	BLACK
A	HOUSING	PBT		1	BLACK

UNIT: MM	TYPE: DC JACK	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
DESIGNER BY:	CHECK BY:	APPROVED BY:	TOLERANCE: ±0.3	ANGLES: ±2°
			SCALE: FULL	VER: 2

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.