
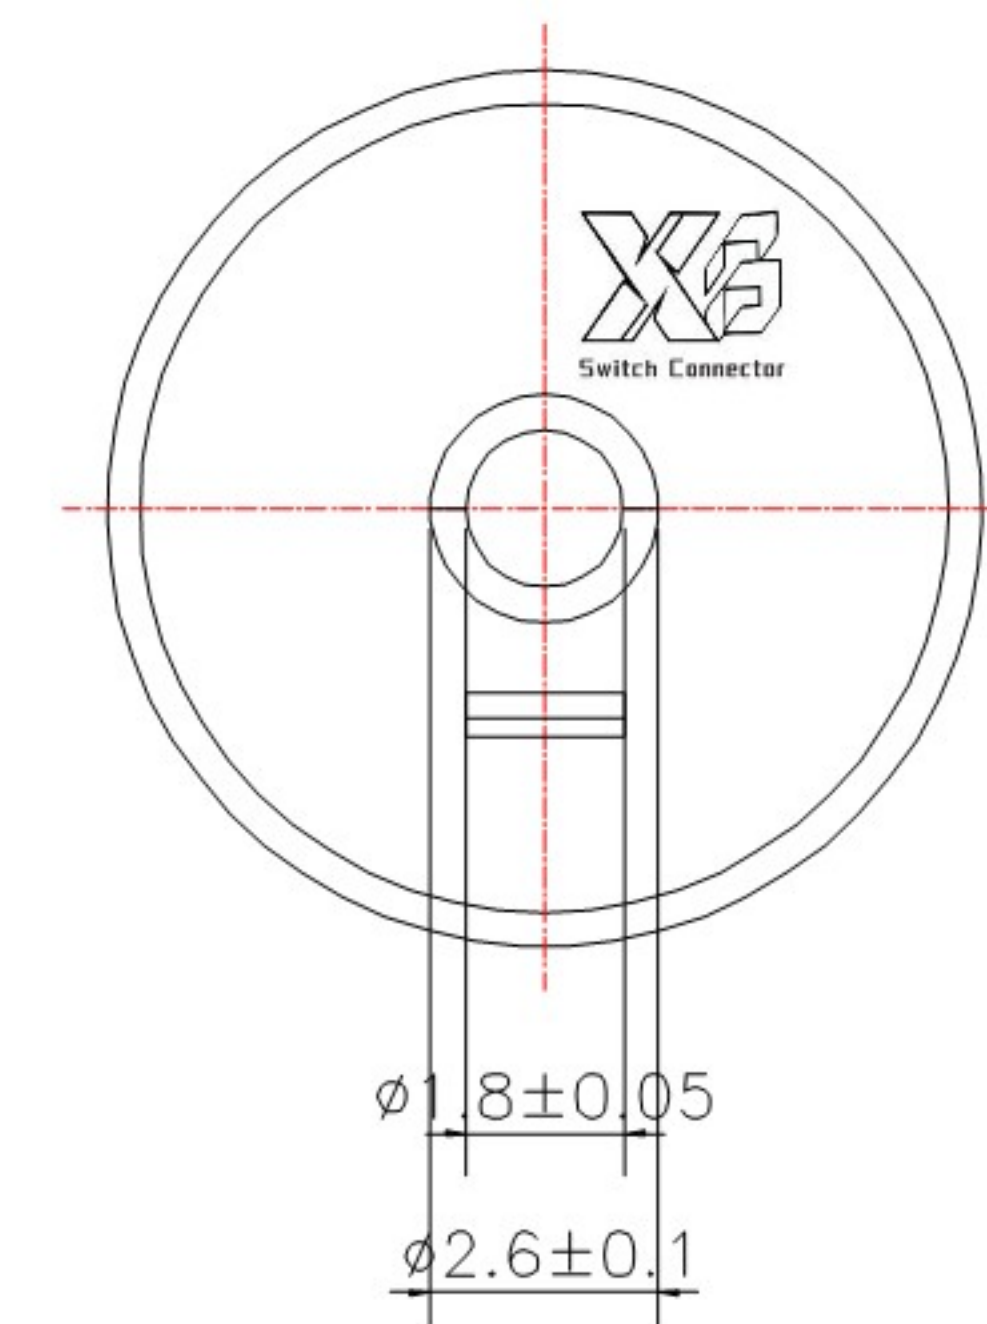


版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

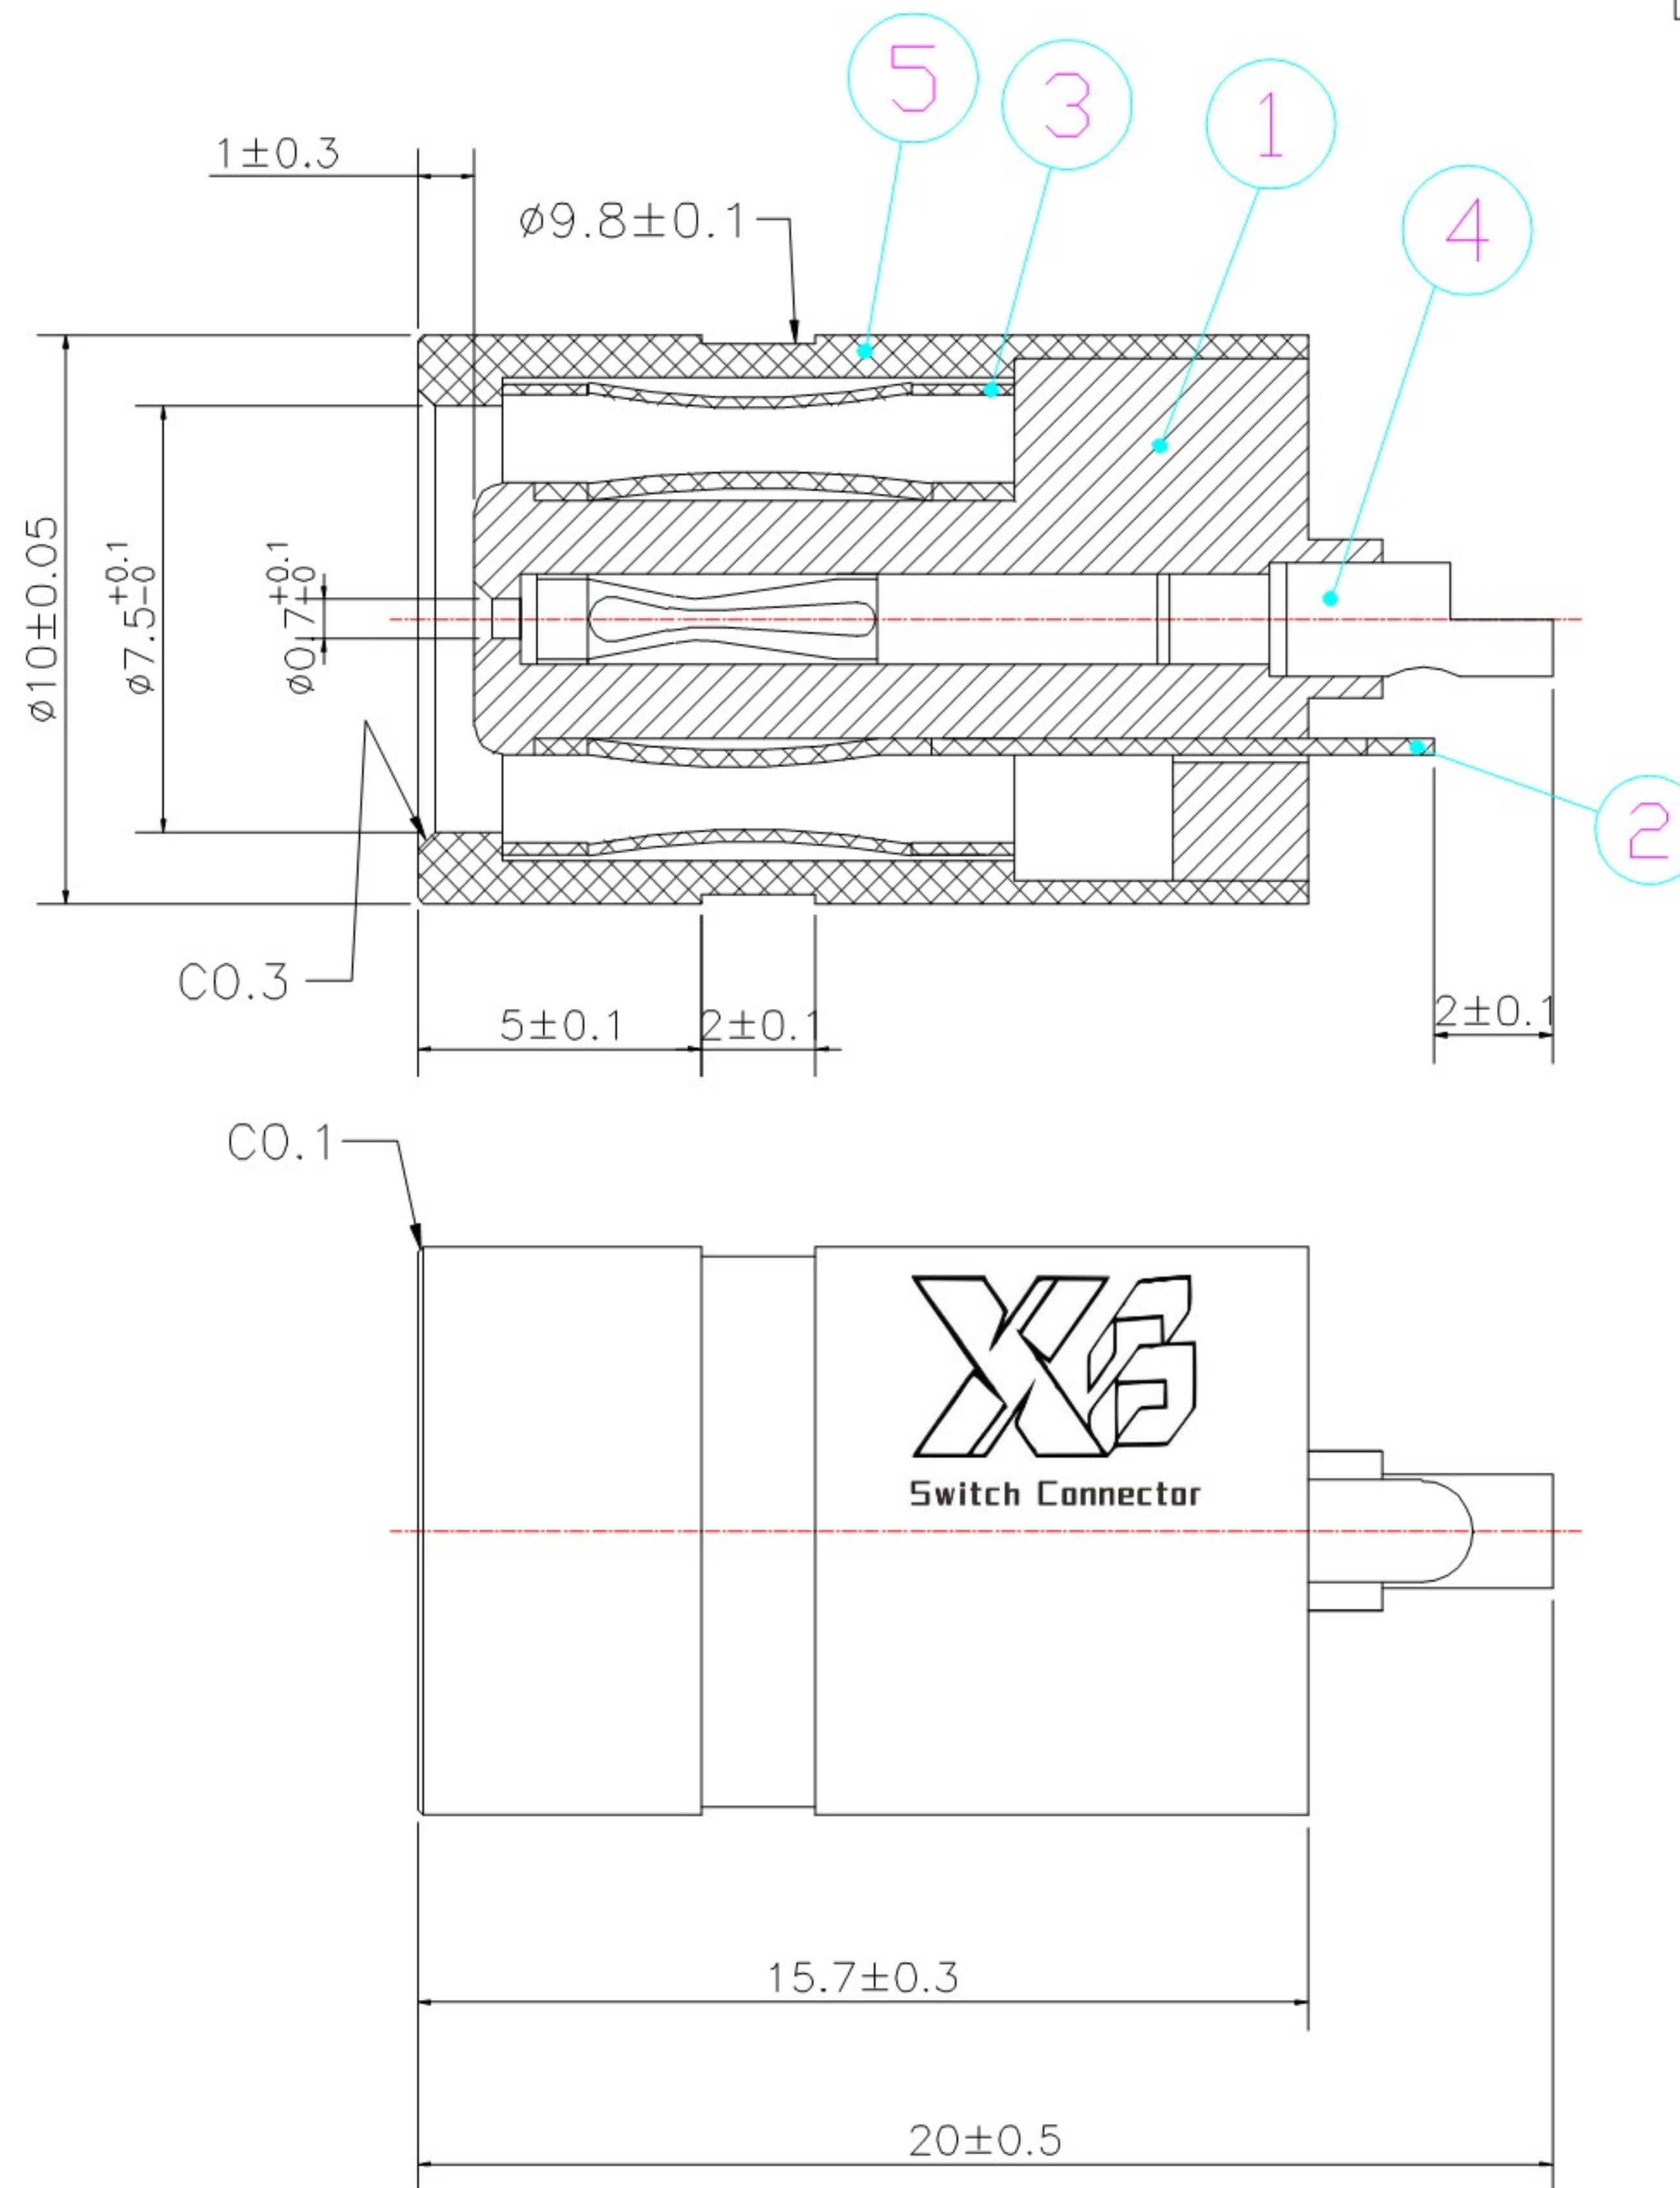

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3 x.x:±0.1 .xx:±0.05	6								
视 图 Third angle projection			5	10*15.7*7.5管	C3604	Ni 1um-3um	June	杨义邦	李莹峰	规 格 DESCRIPTION:	DC JACK Ø7.4*Ø0.6*20
			4	7406端子	C5191	Ni 1um-3um				品 名 P/N:	74P06J10
			3	7406大弹圈	C5191	Ni 1um-3um				图 号 DRAWN NO:	CP-08-0035
2	7406灯笼弹圈		C5191	Ni 1um-3um							
1	PLASTIC		PBT	BLACK							
NO.	PART	MATERIAL	PLATING								