
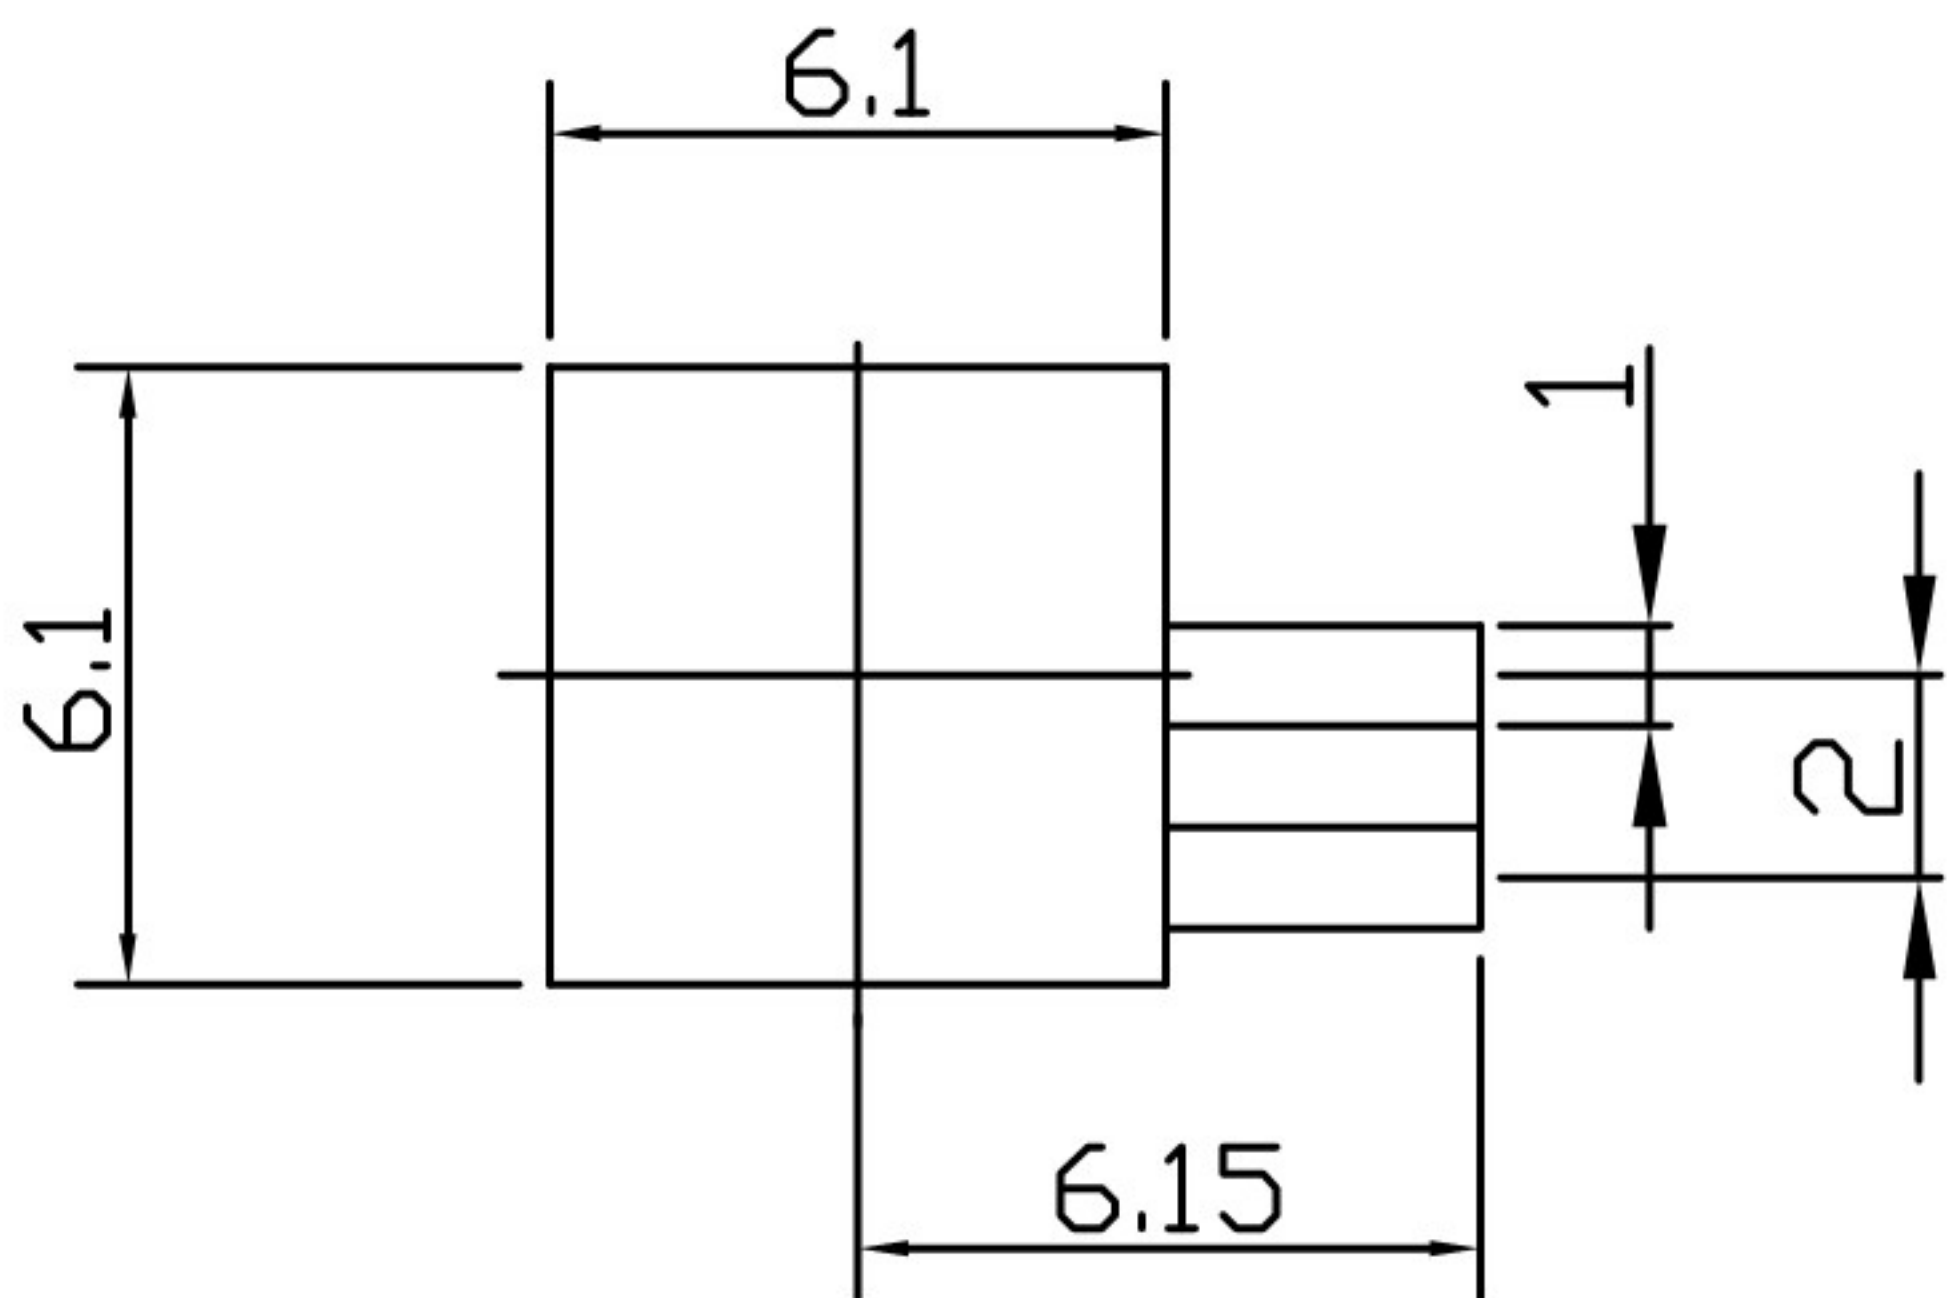
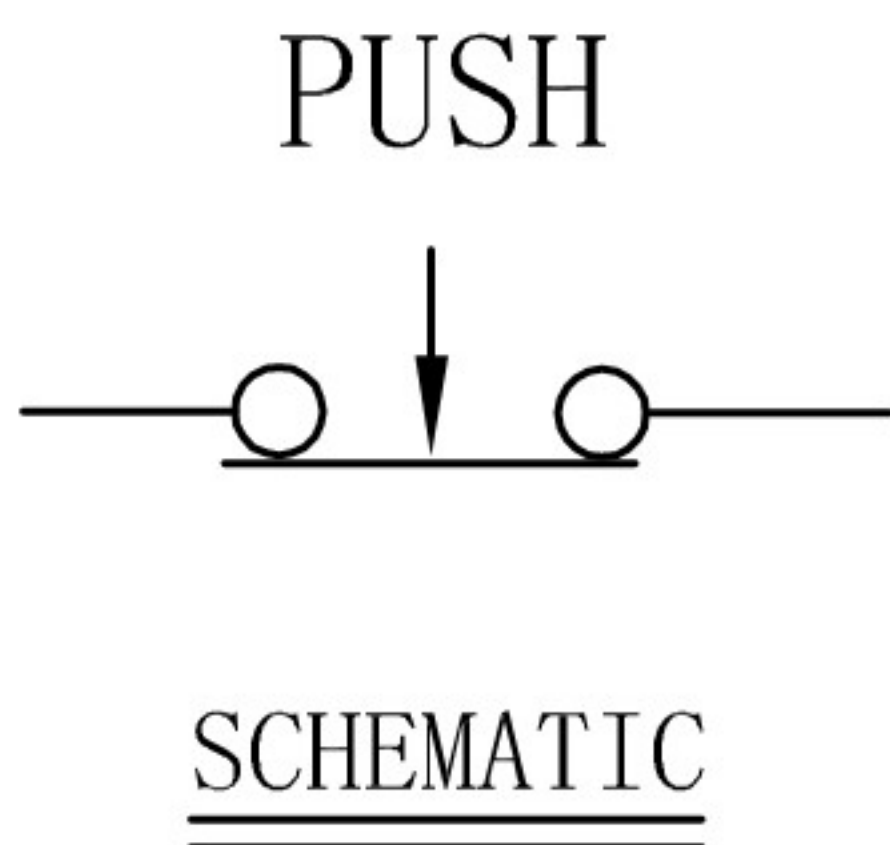
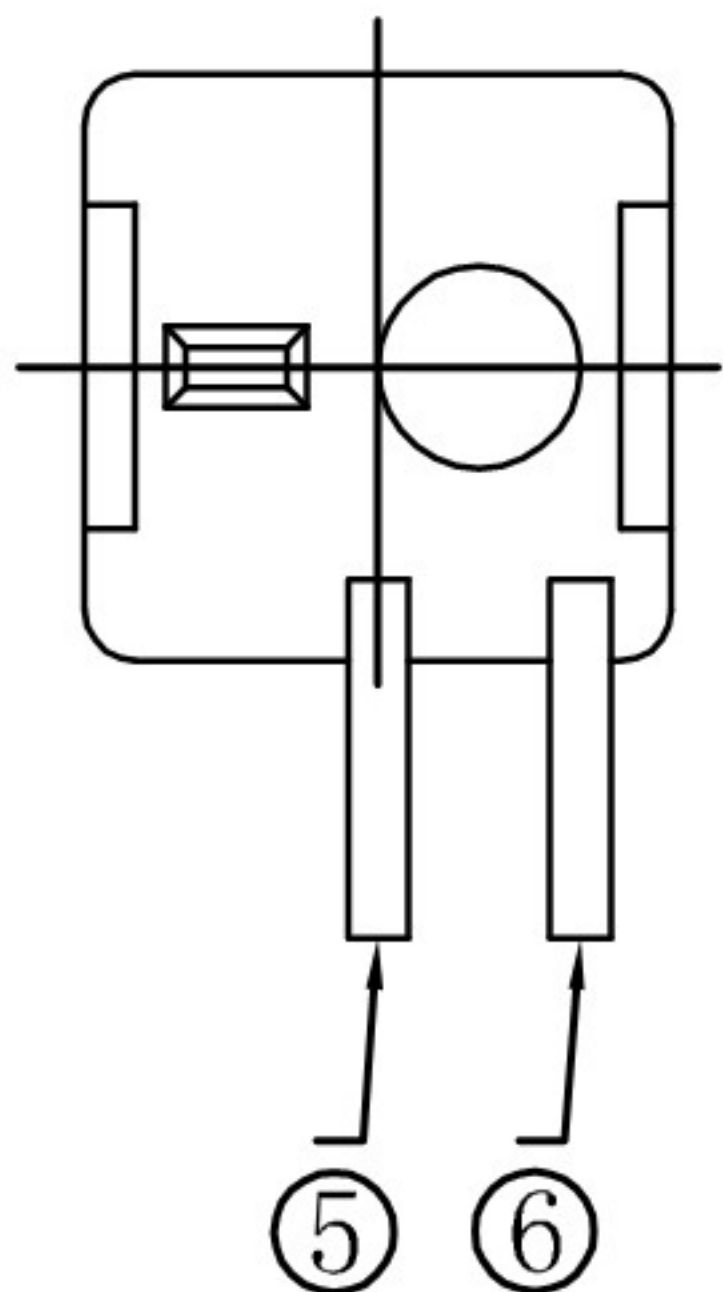
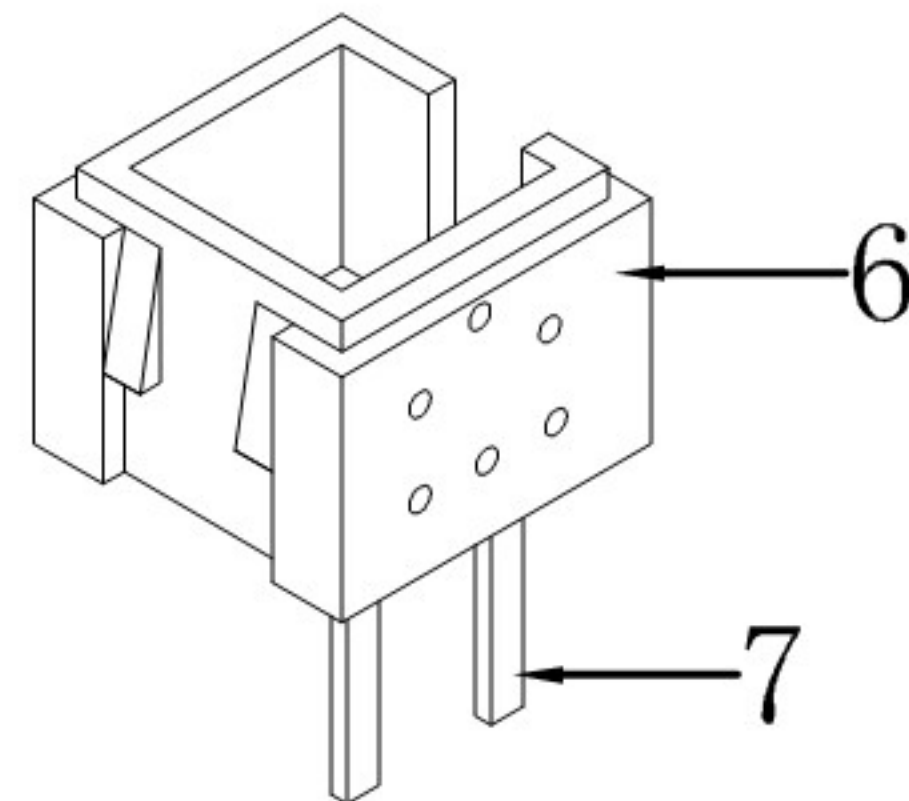
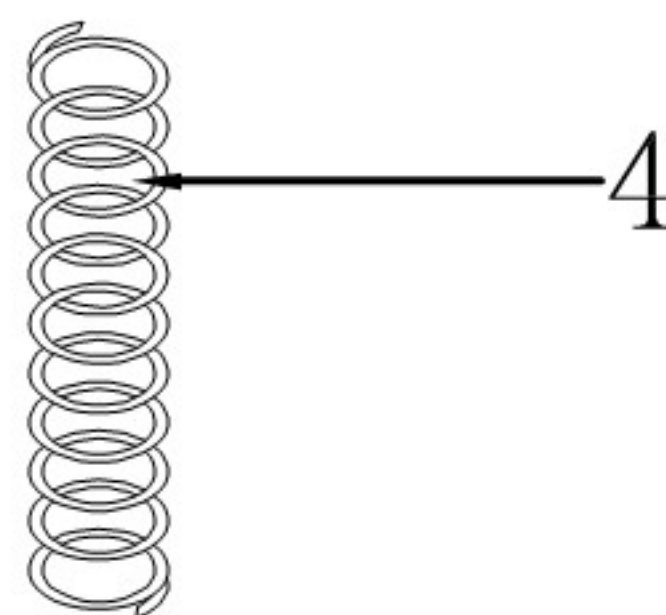
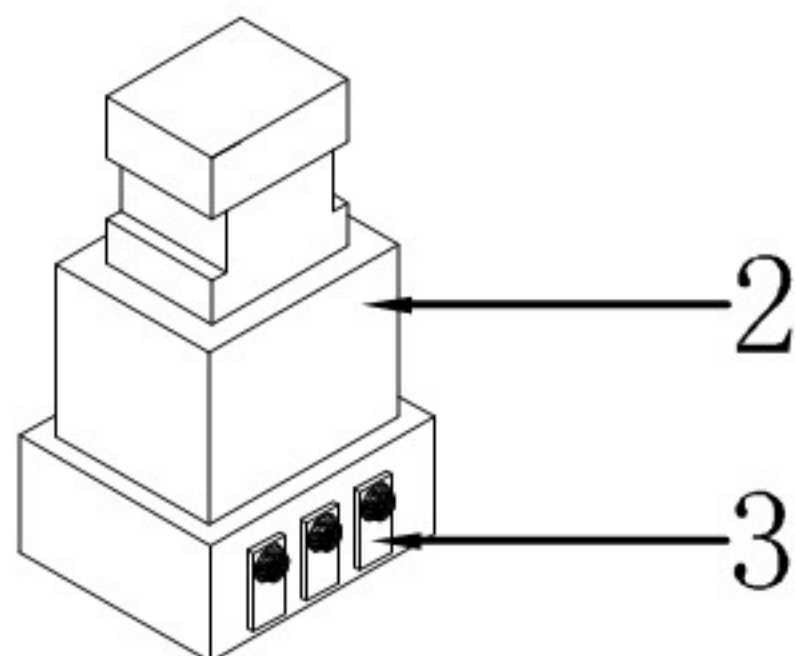
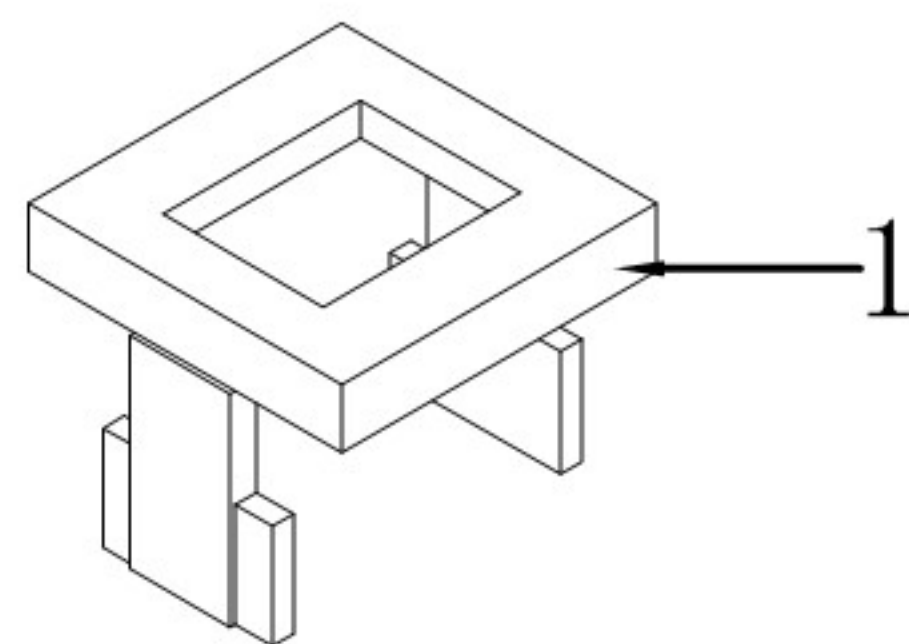
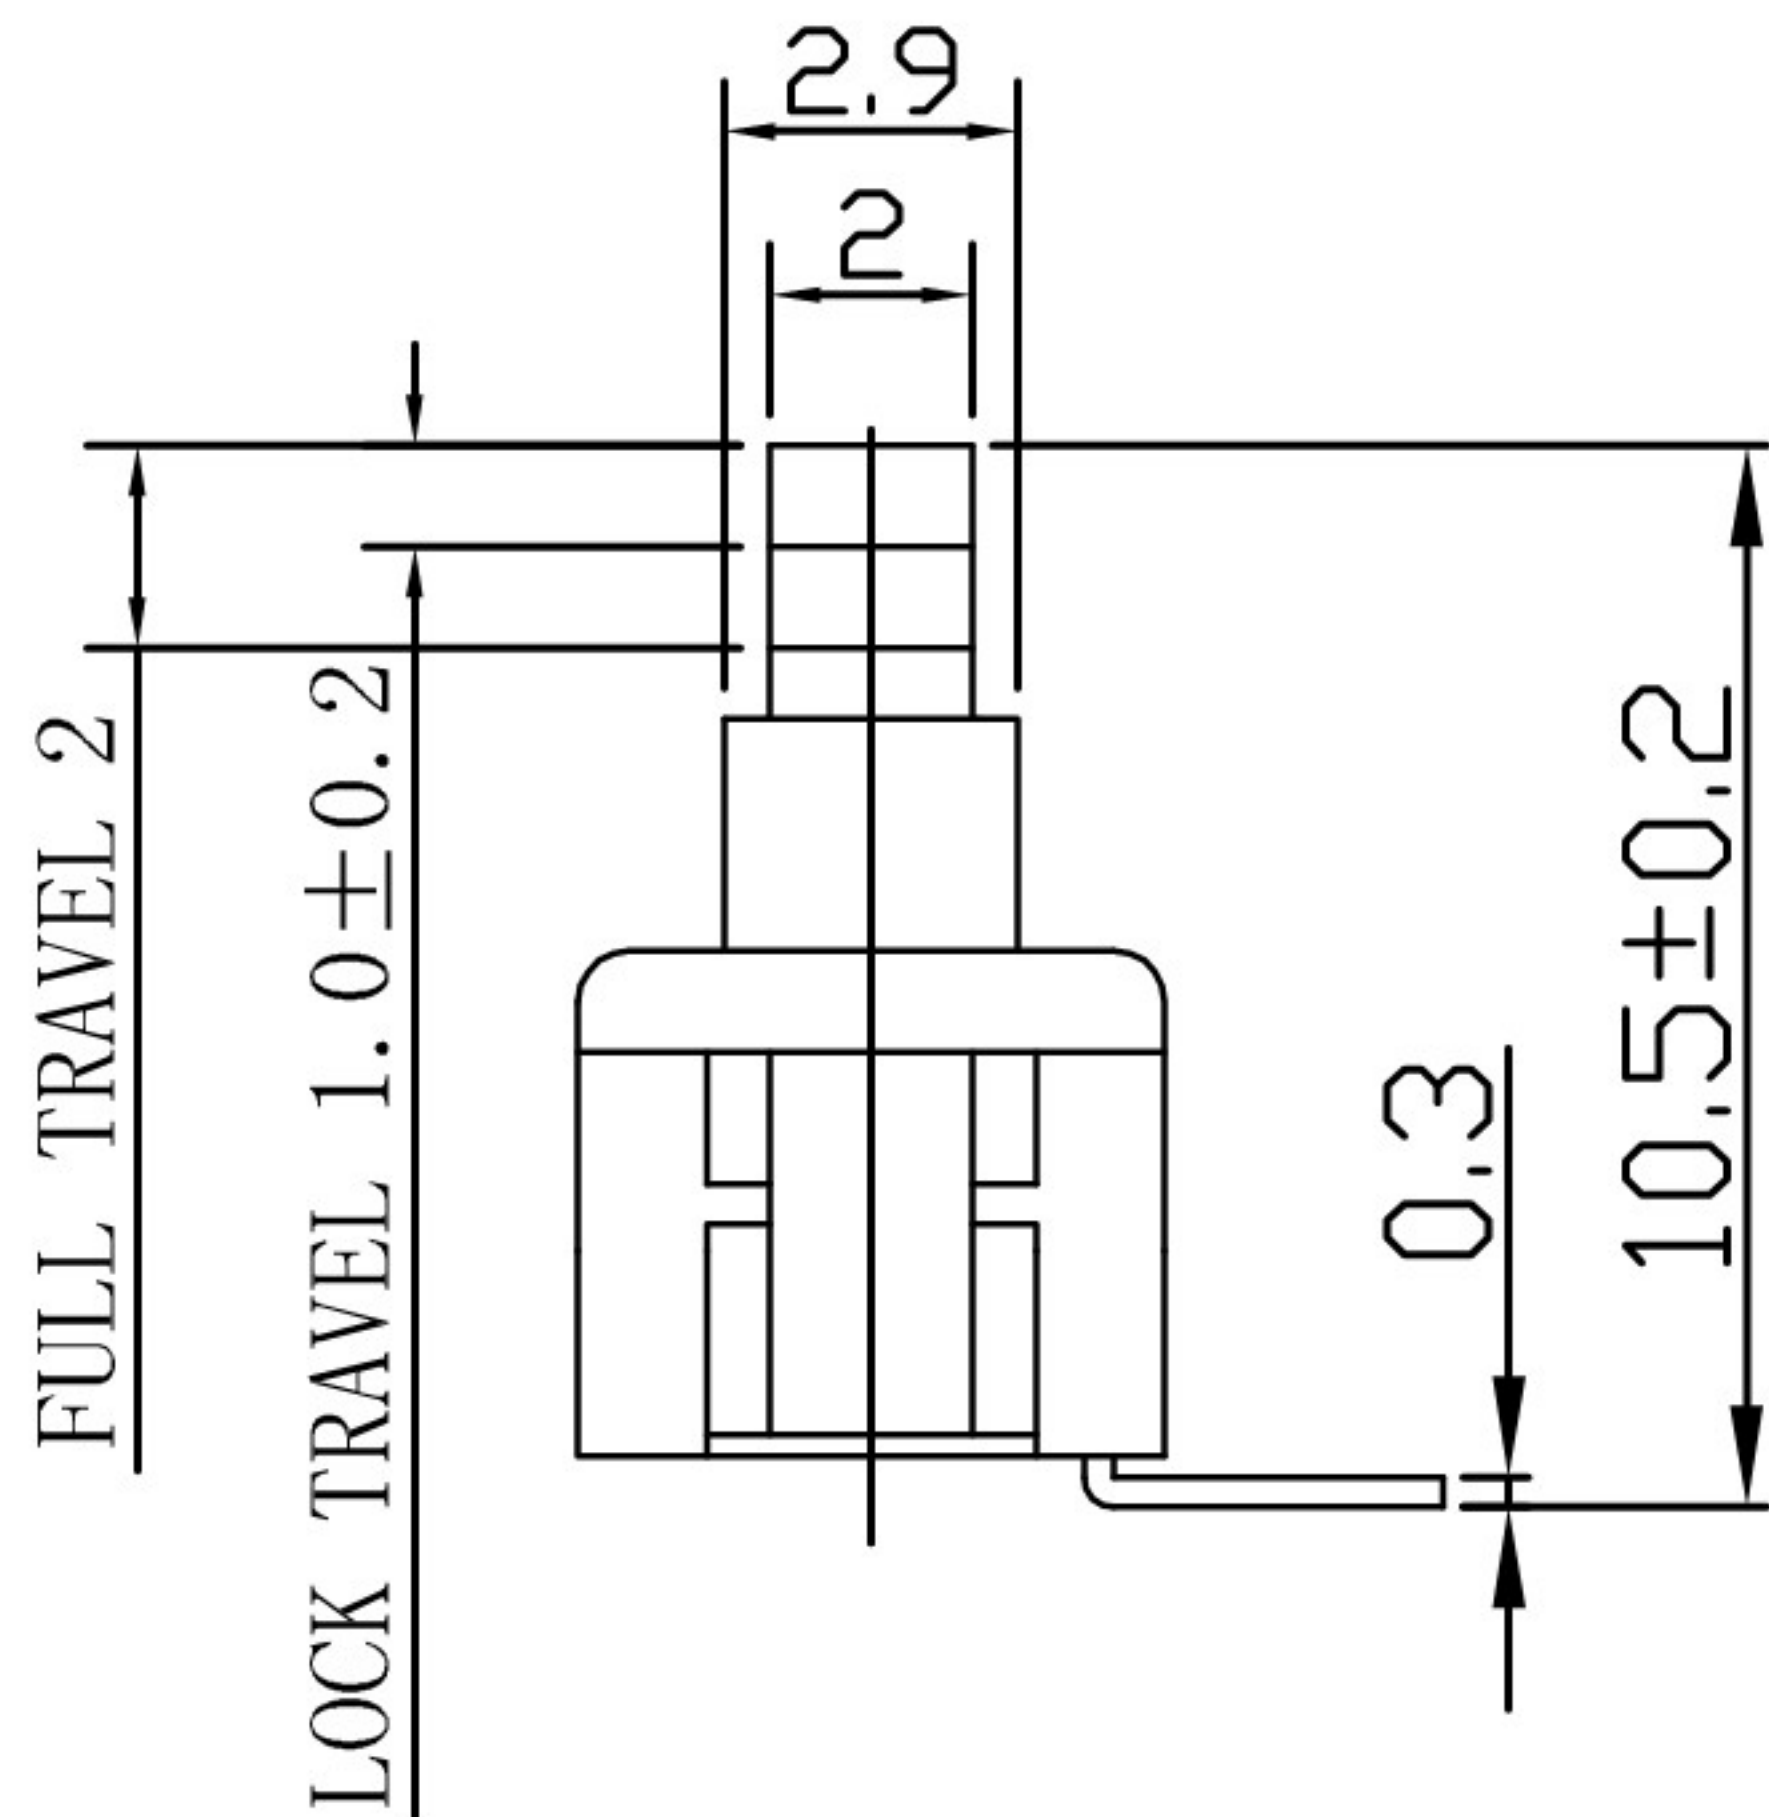
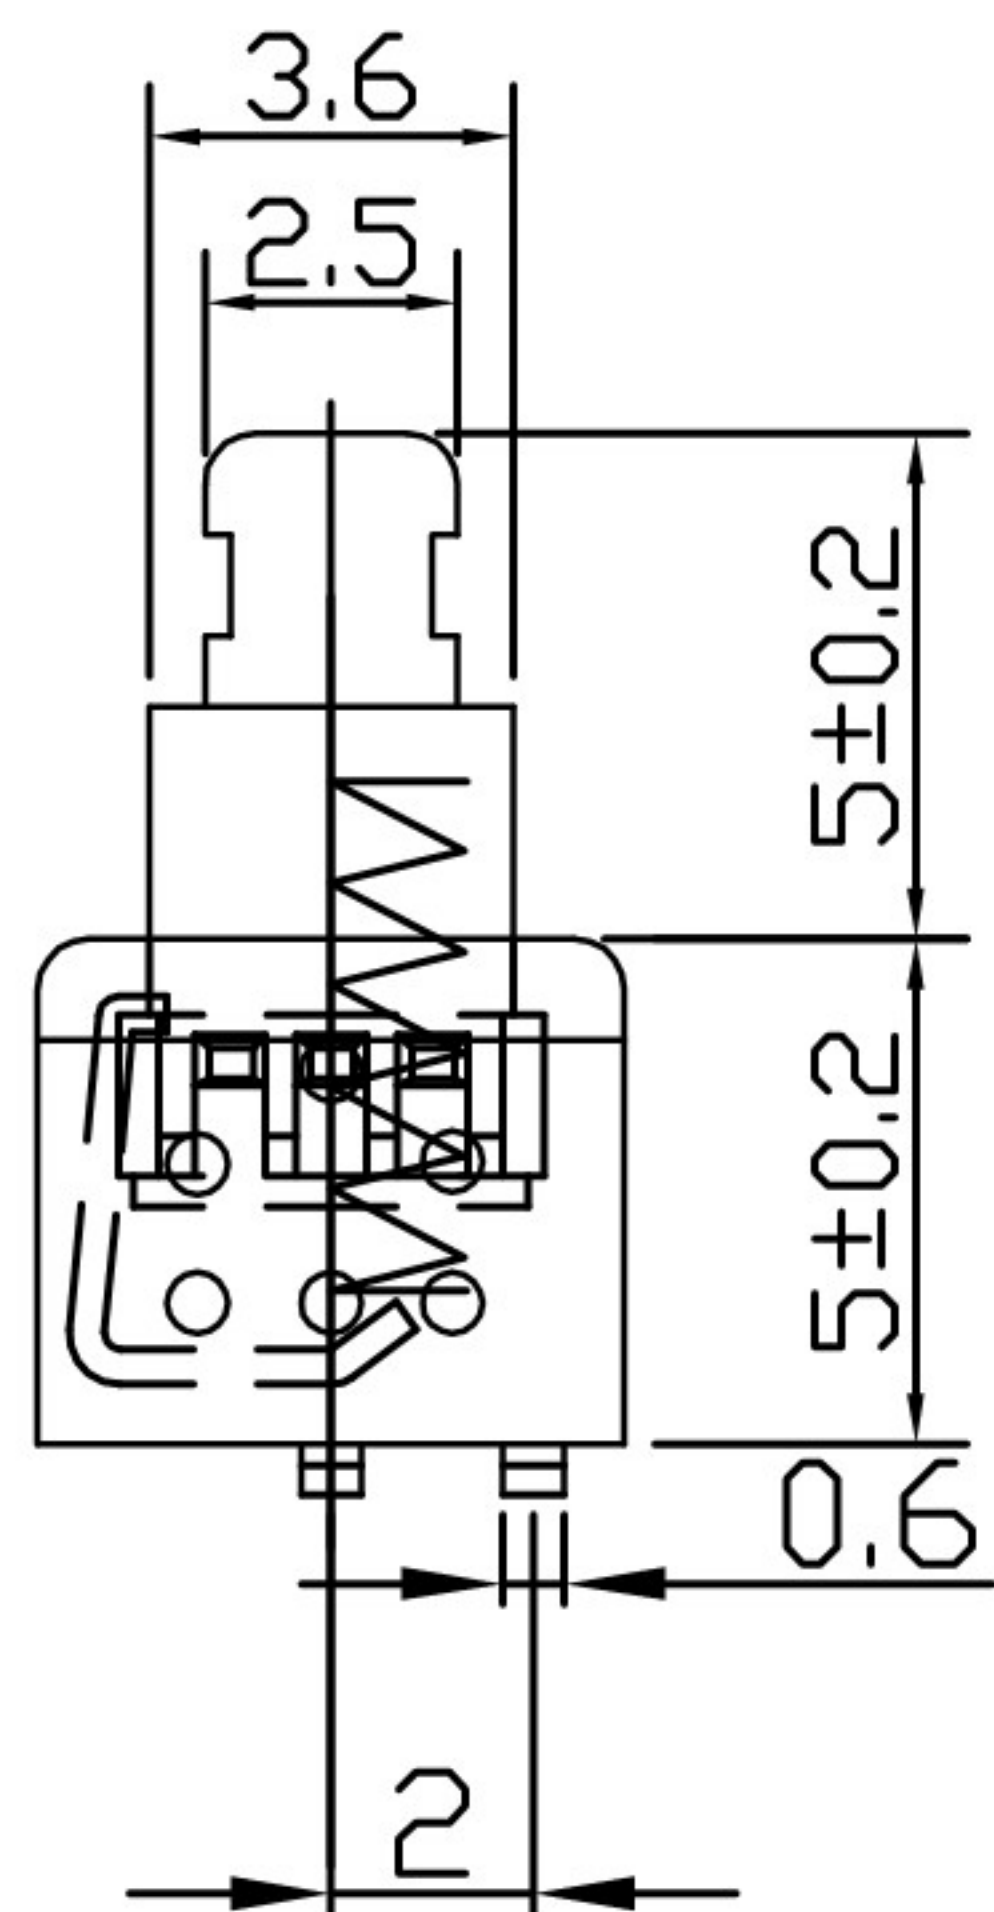


REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

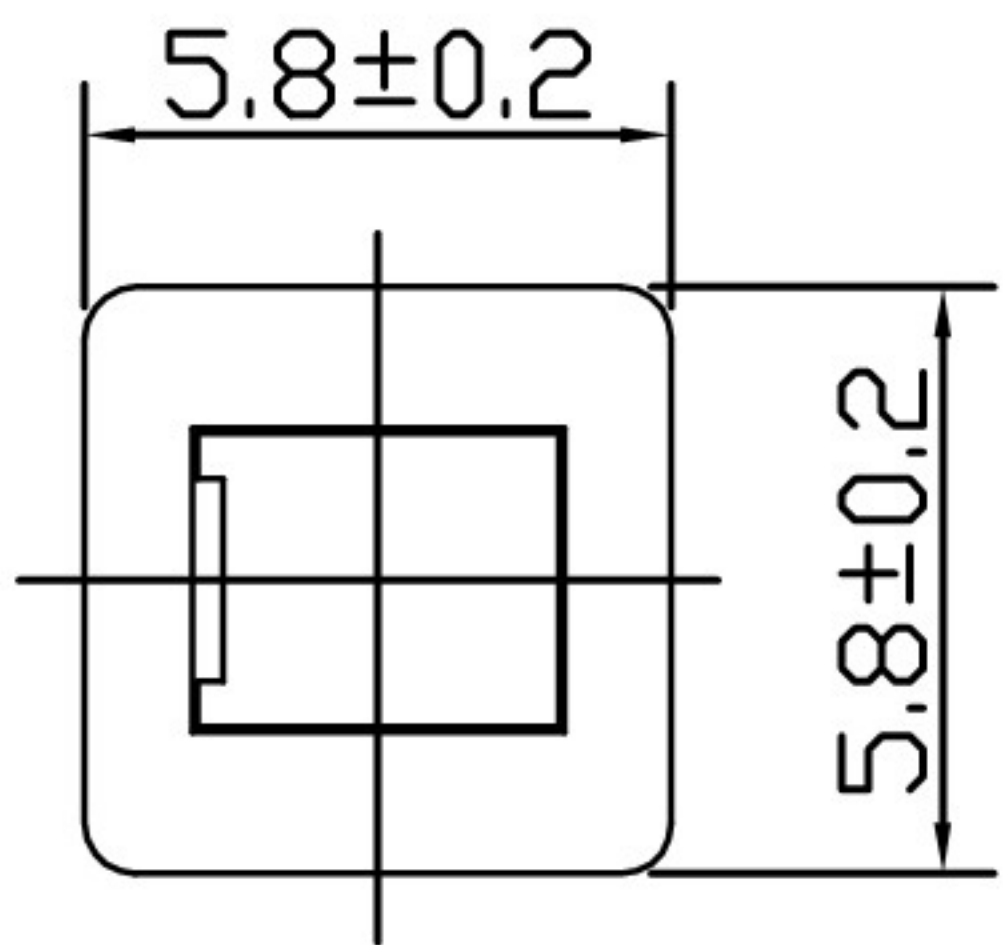

P. C. B LAYOUT

ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

8				
7	TERMINAL	BRASS	2	Ag PLATED
6	CASE	PPA	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

		东莞市溪榜电子有限公司			
Switch Connector		DONG GUAN XI BANG ELECTRONICS CO., LTD.			
GENERAL TOLERANCE未指的公差		TITLE			
X. ± 0.5	X. ° ± 5°	名称：按键开关			
.X ± 0.3	.X ° ± 2°				
.XX ± 0.2	.XX ° ± 1°	PART NO. 零件编号		DWG NO. 图纸编号	
.XXX ± 0.1	.XXX ° ± 0.5°	XB-5858-2P-N			
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	SCALE 比例	
		ROBIN		1:1	REV.