
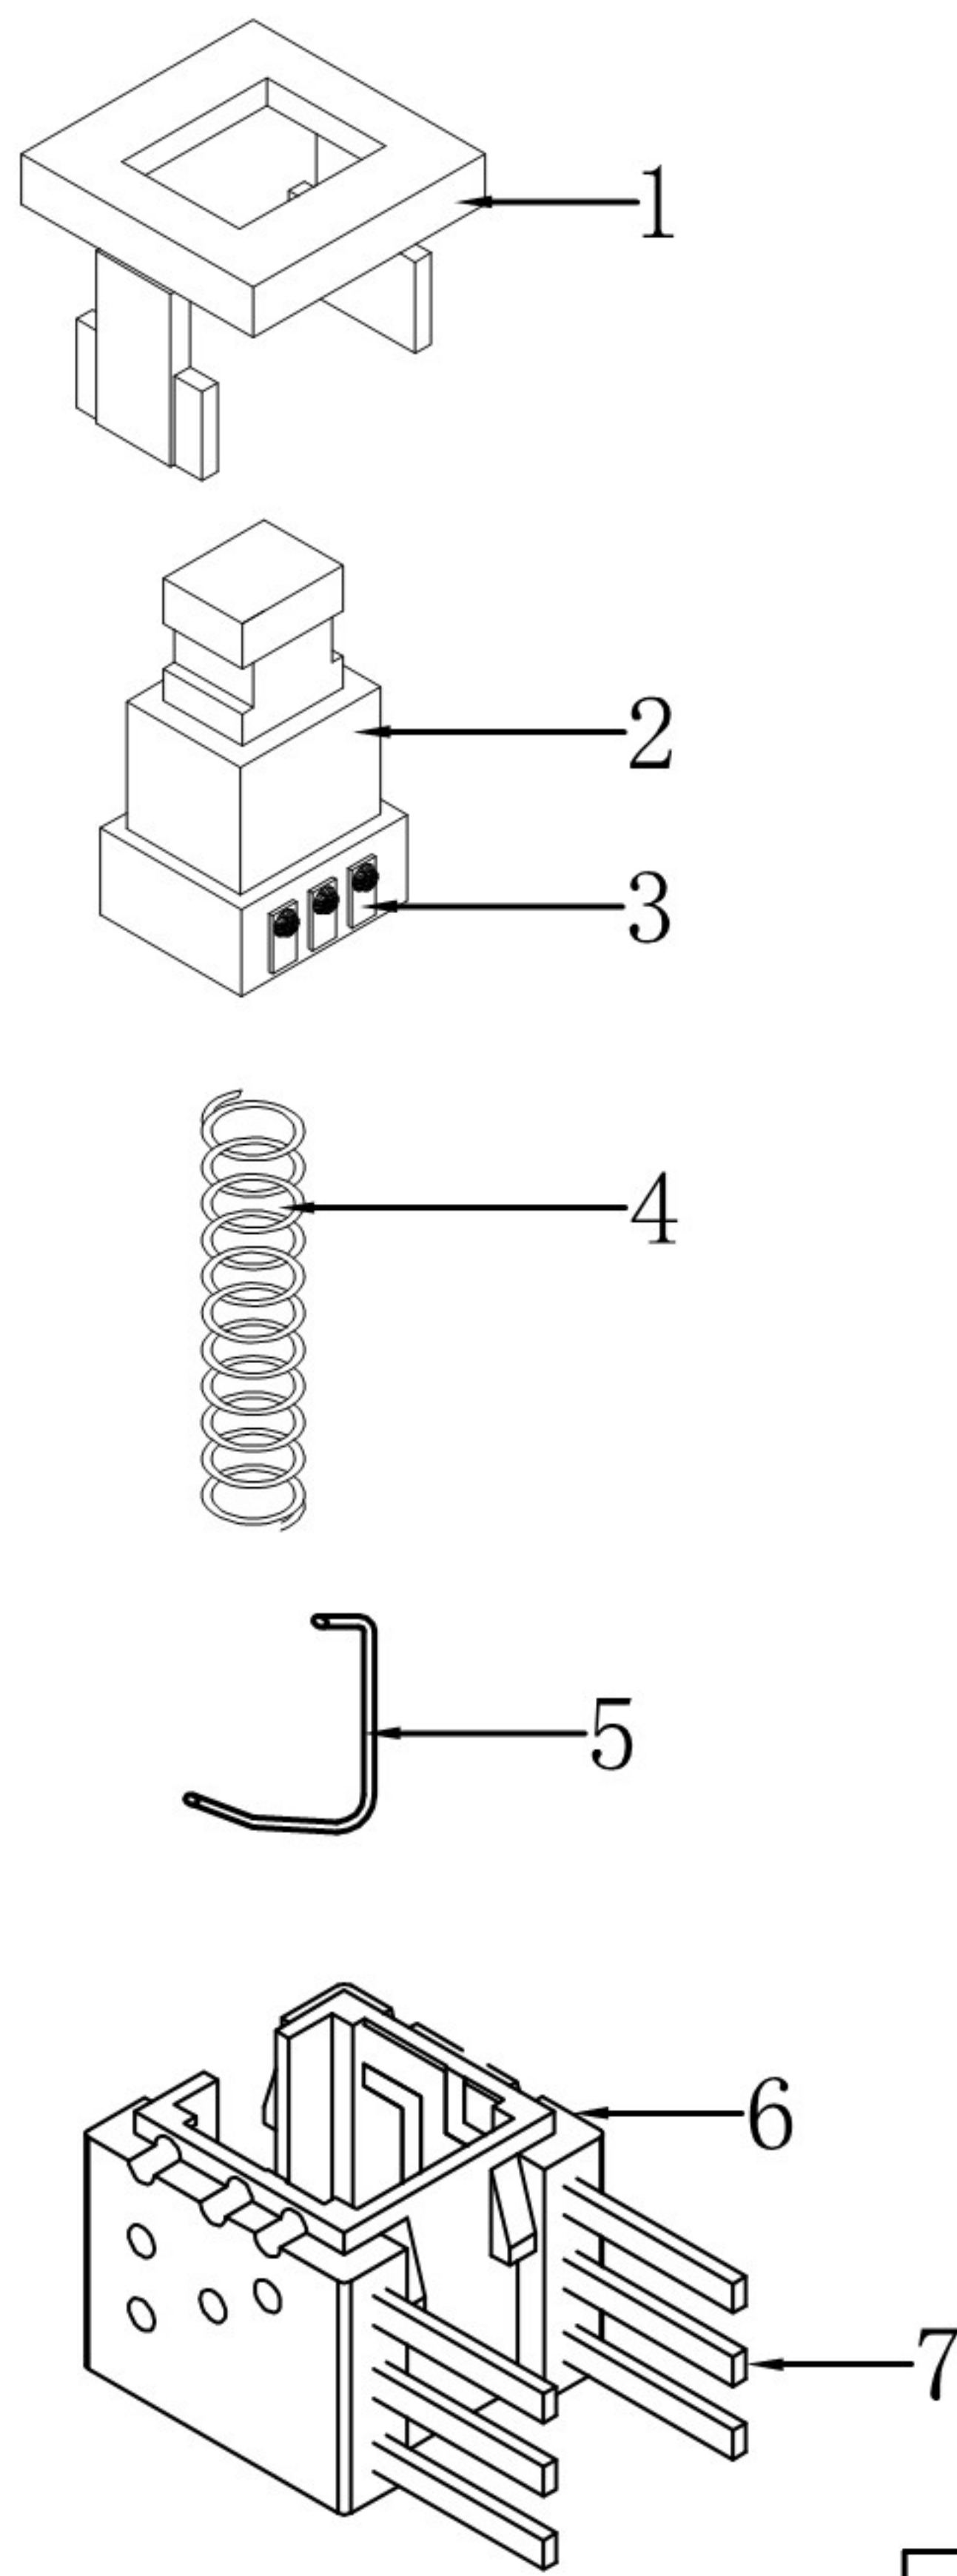
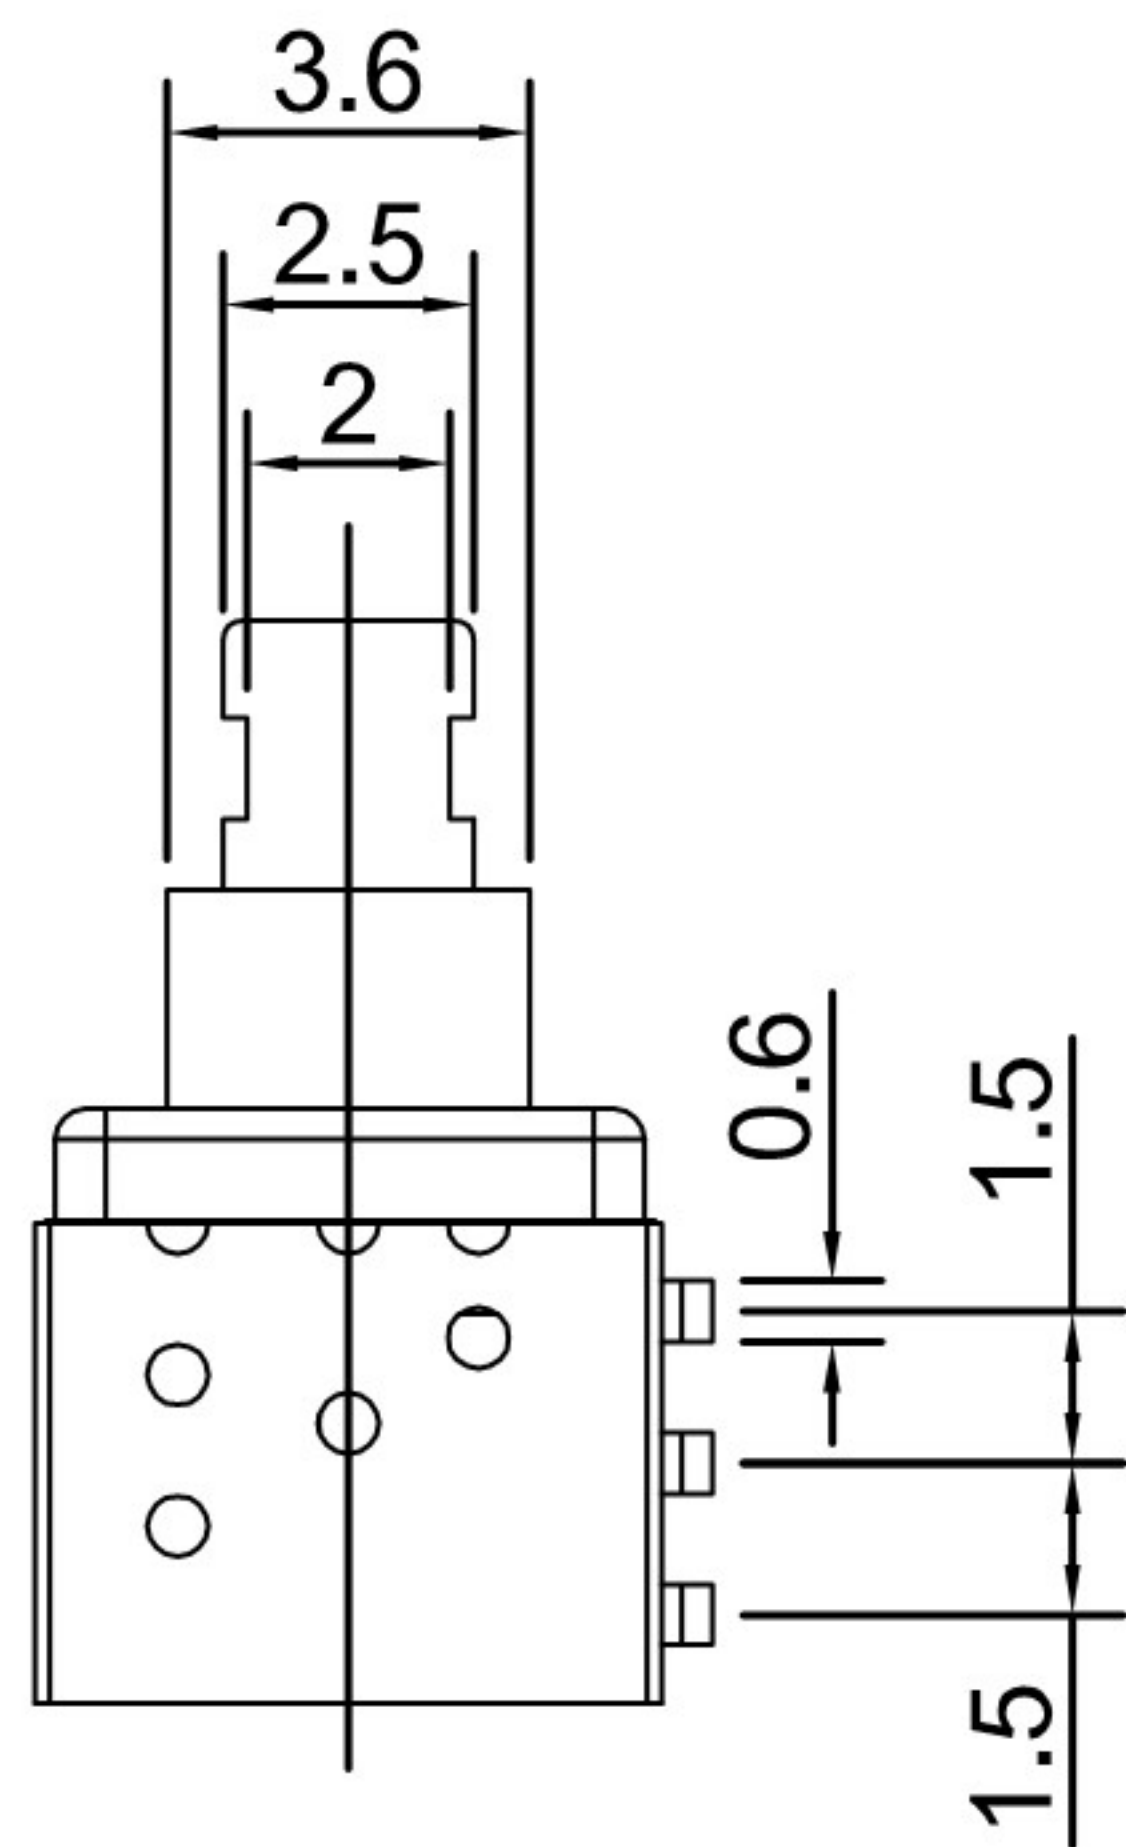
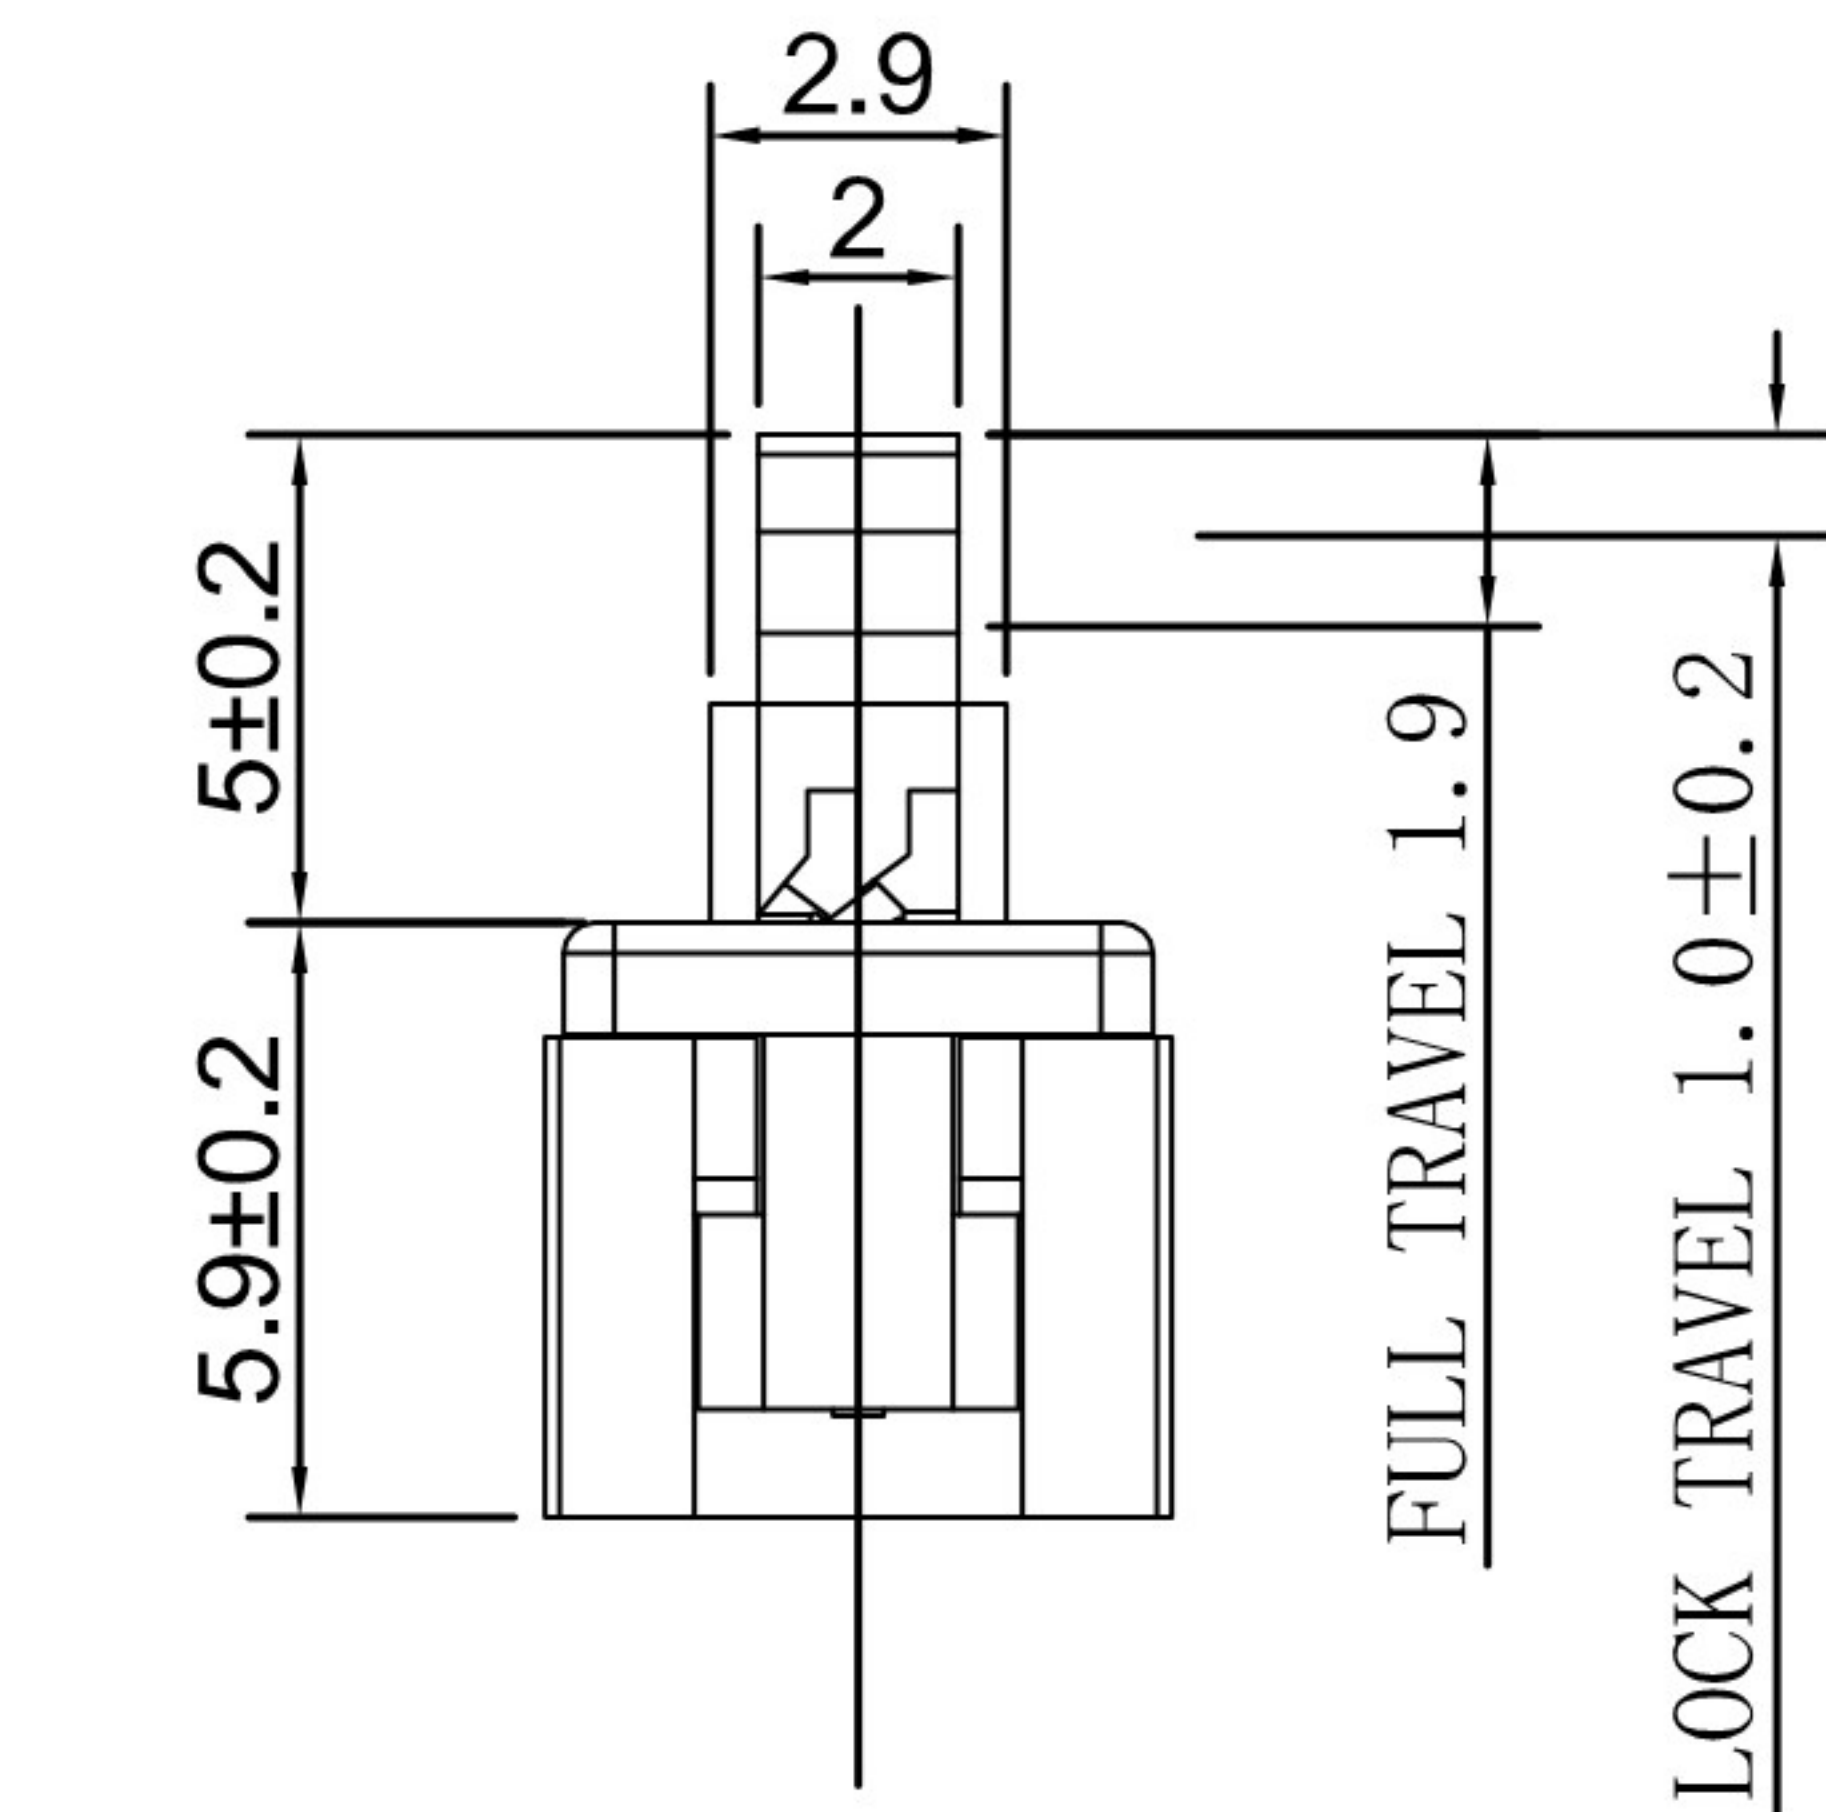


REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名


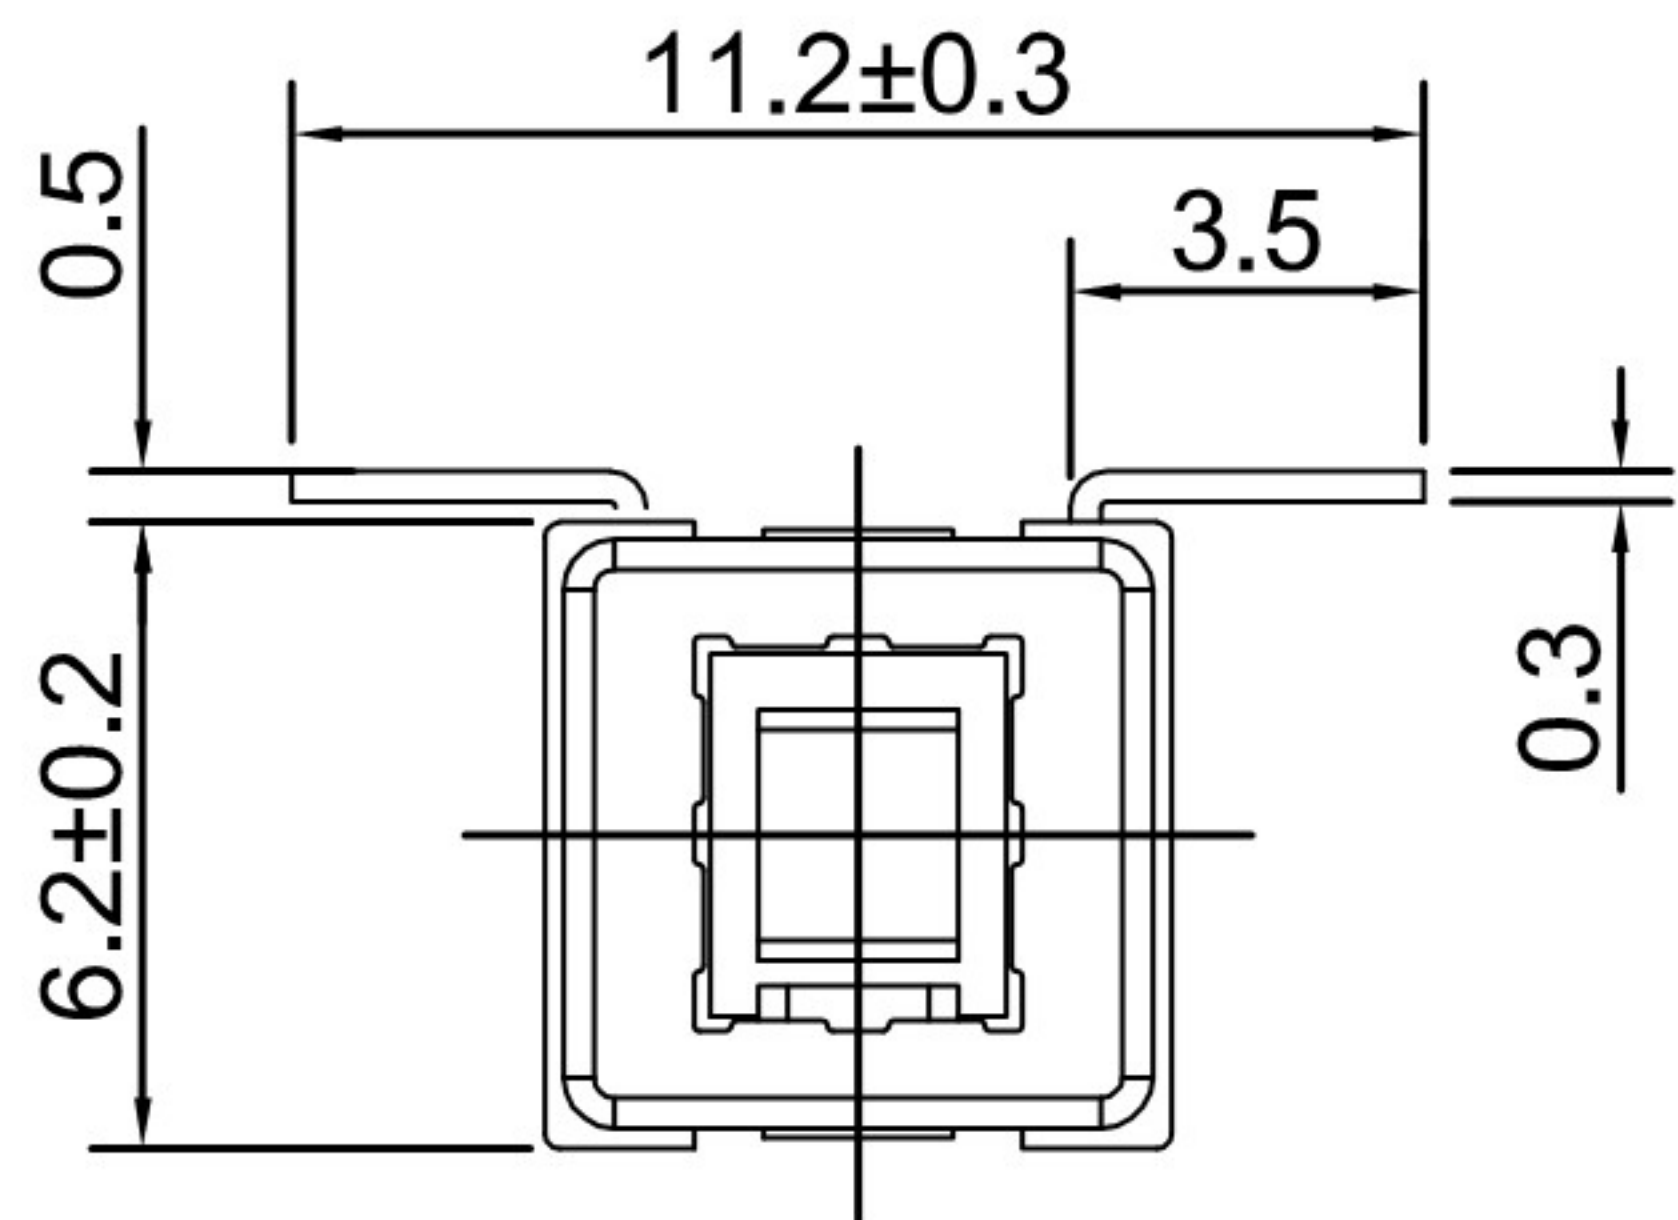


ELECTRICAL CHARACTERISTICS


- 1. RATING: DC 30V 0.5A
- 2. CONTACT RESISTANCE: 100mΩ MAX
- 3. INSULATION RESISTANCE: 100MΩ MIN
- 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- 2. OPERATING FORCE: 180±30gf
- 3. MECHANICAL LIFE: 10,000 cycles

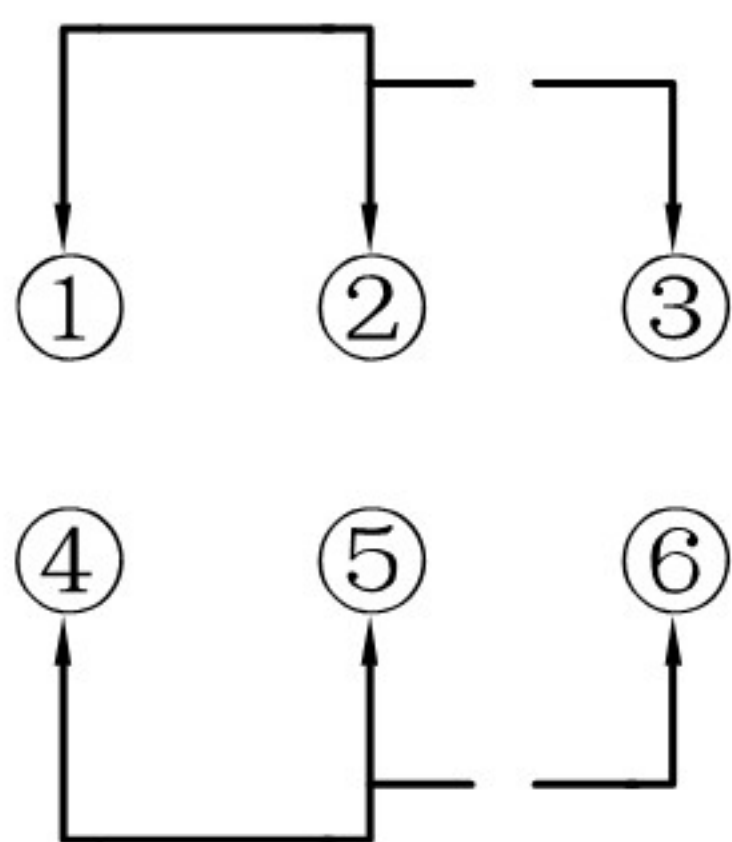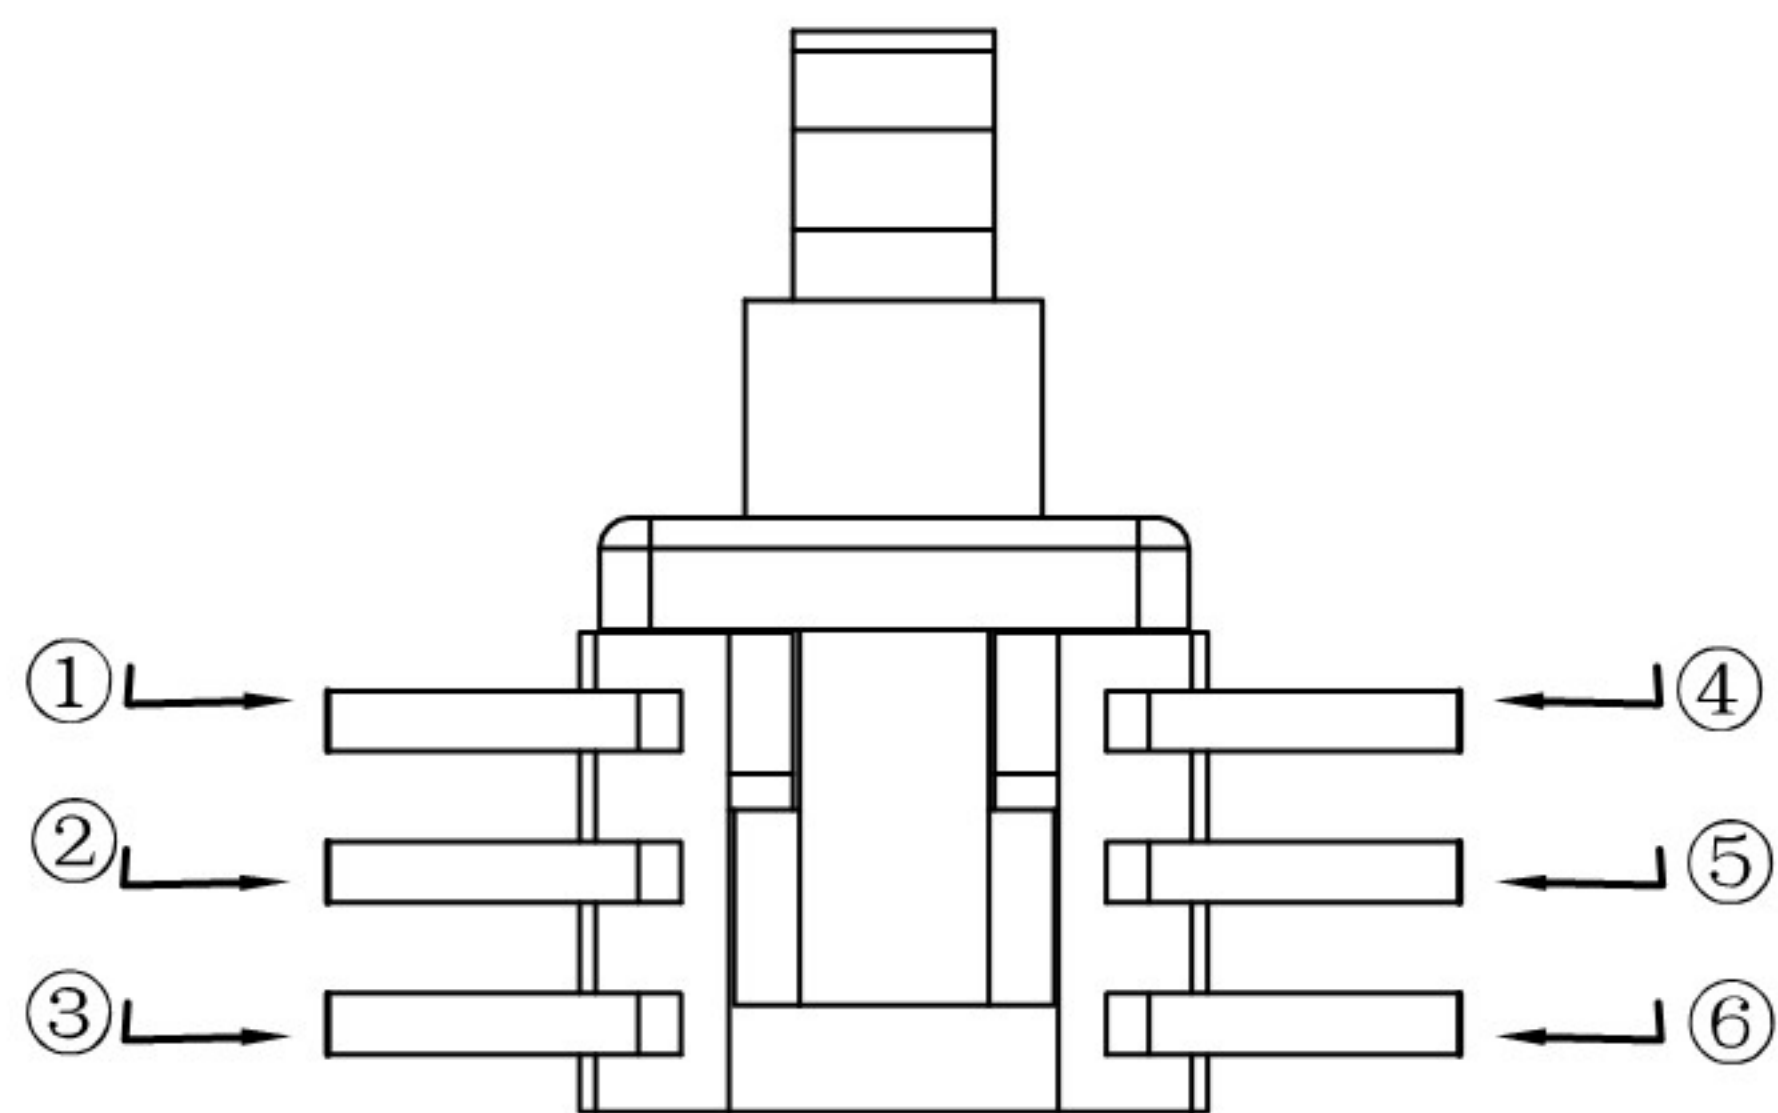

SCHEMATIC

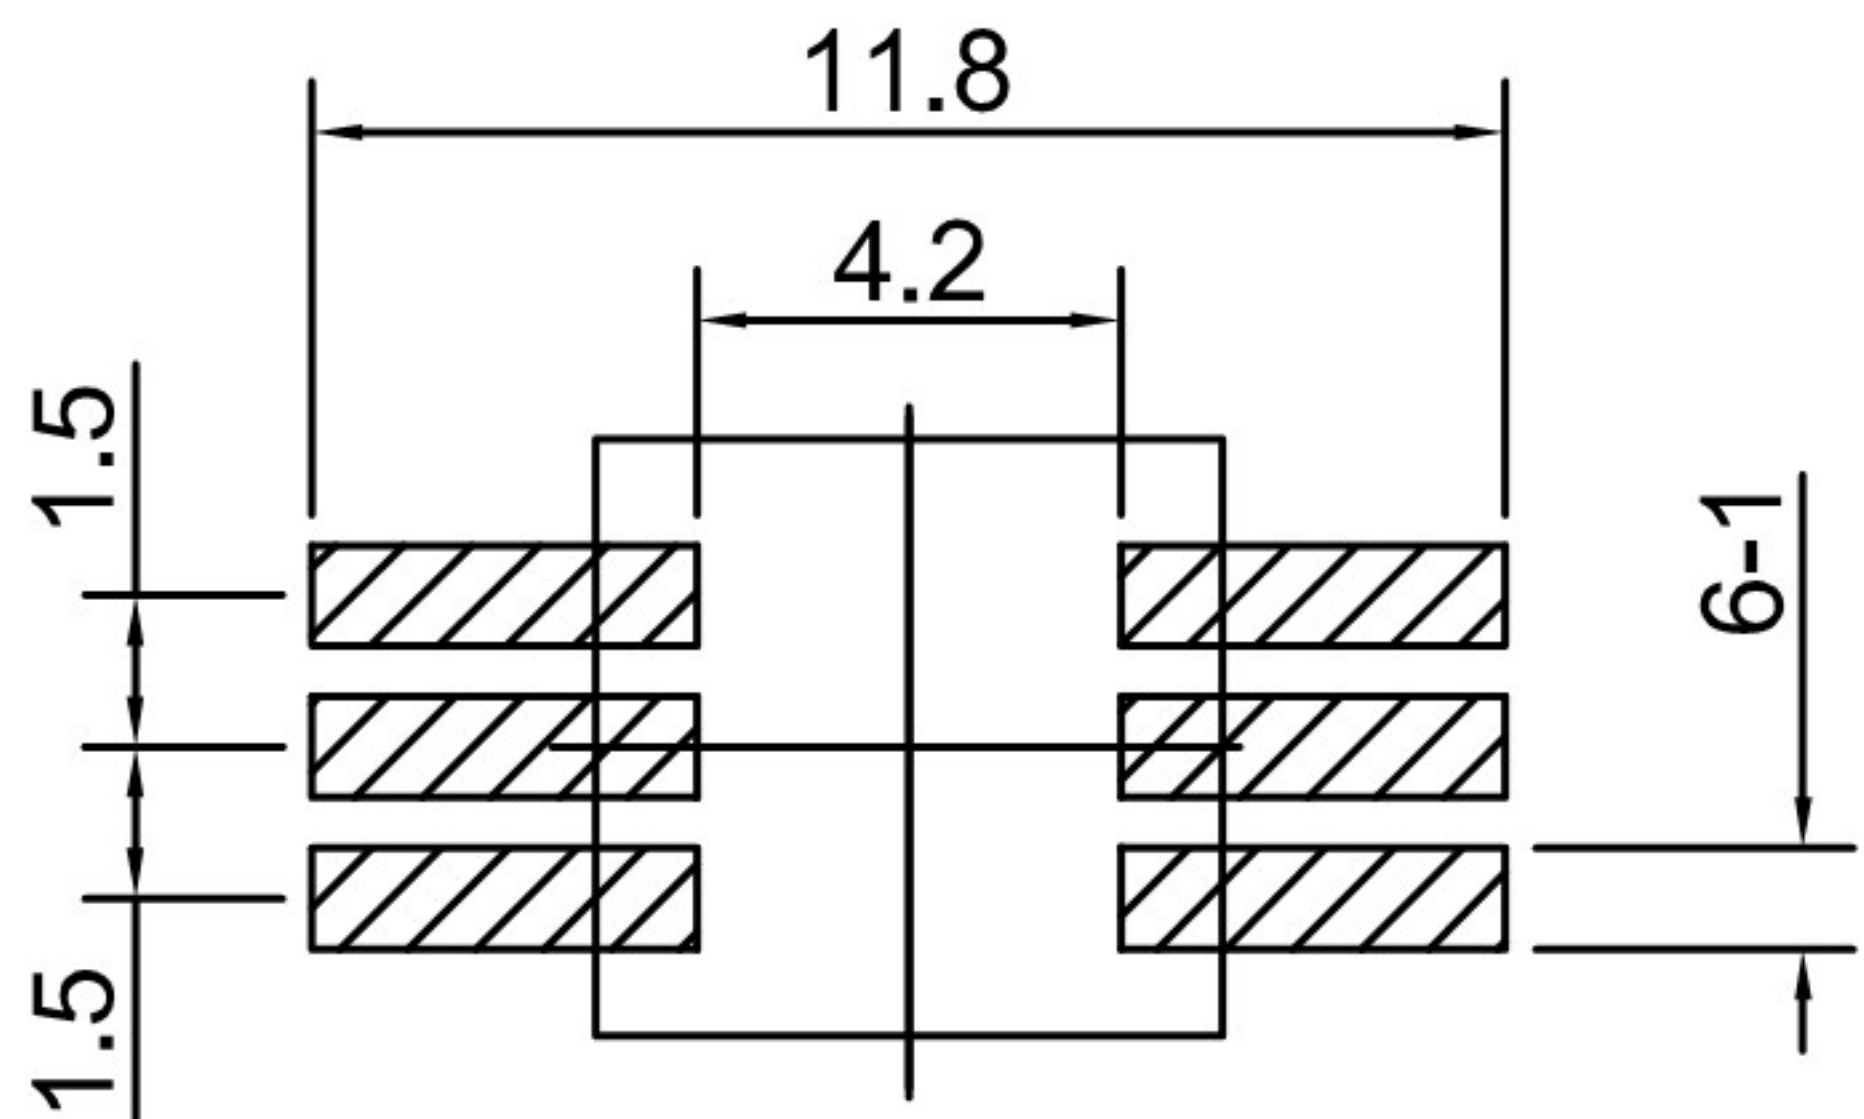

P. C. B LAYOUT

7	TERMINAL	BRASS	6	Ag PLATED
6	CASE	PPA	1	GRAY
5	LOCK PIN	SUS WIRE $\phi 0.35$	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE未指的公差		TITLE		
X. ± 0.5	X. ° ± 5°	名称 XB-5858-M-L		
.X ± 0.3	.X ° ± 2°	PART NO. 零件编号		
.XX ± 0.2	.XX ° ± 1°			
.XXX ± 0.1	.XXX ° ± 0.5°			
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	DWG NO. 图纸编号 XB-5858-M-L
			SCALE 比例 1:1	PROJ. REV.