

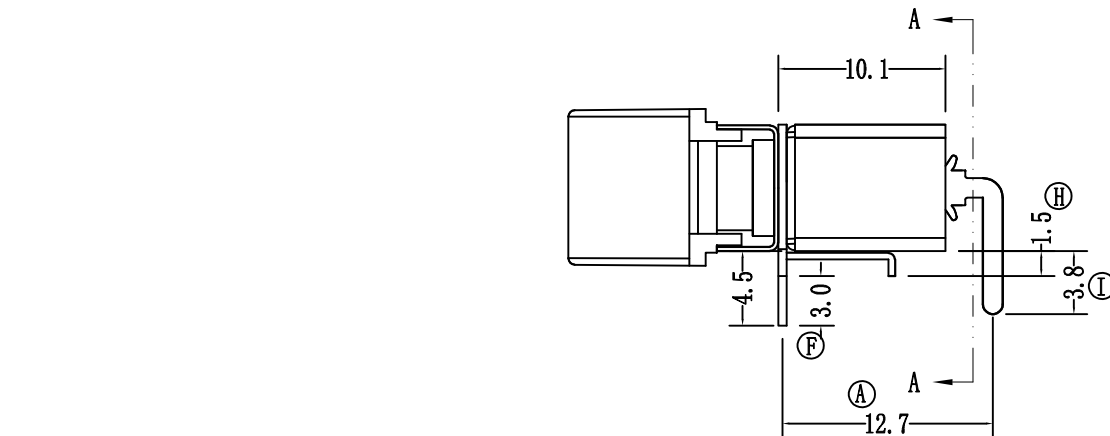


PC安装

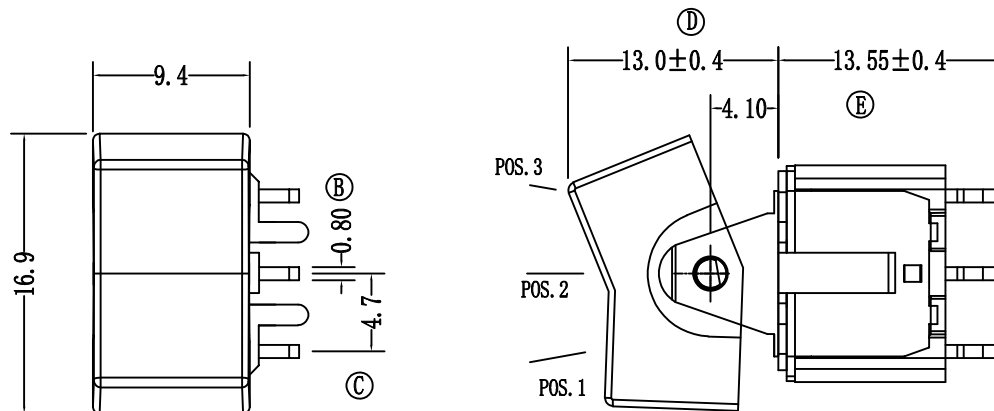

标注: ①-⑩为重点检测尺寸

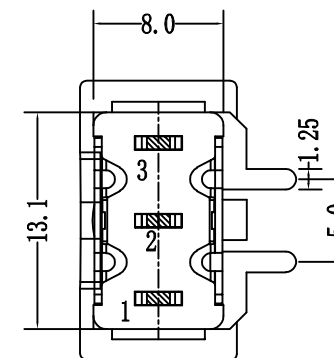

A-A剖面

Technical characteristics

SPECIFICATION: 5 A max. @ 125 VAC.

2 A max. @ 250 VAC.

MECHANICAL LIFE: 40,000 make-and-break cycles.

ELECTRICAL LIFE: 10,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC

100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)

CAP: PA66

HOUSING: Stainless Steel.

ACTUATOR: Alloy, nickel plated.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS

按钮位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model			
NO.	ON	NONE	ON
SCHEMATIC		NONE	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES	.X± 0.4 .XX± 0.25	角度	± 5°	UNIT 单位	mm	SCALE 1:1	
				版本	A0	比例尺	NONE	TITLE 图名	Miniature Rocker And Lever Switch		
				VERSION		SCALE		DWG NO. 料号			
				核准		核对		绘图	WSL	PART NO. 型号	XB-MR-1-102-A03-0006-RS
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			