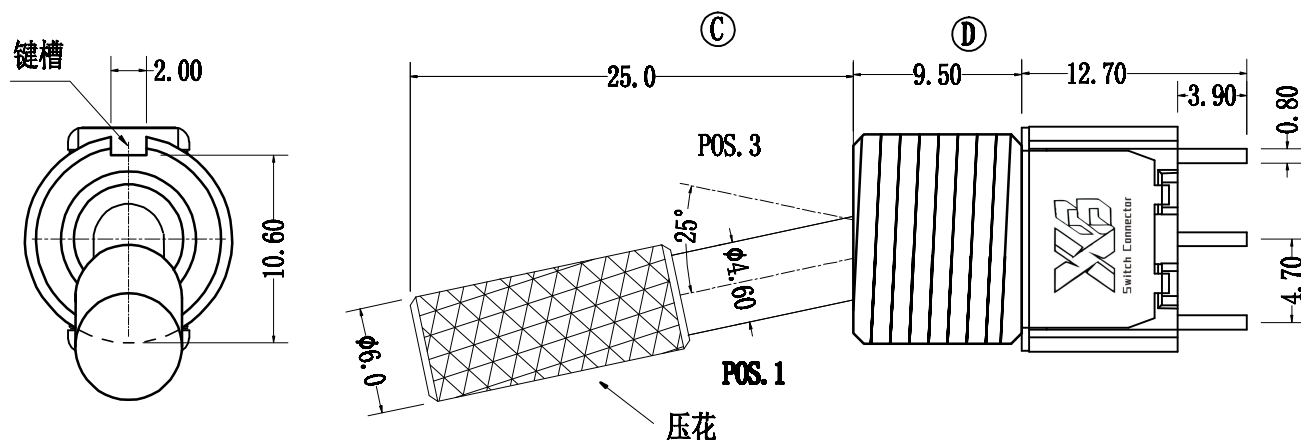
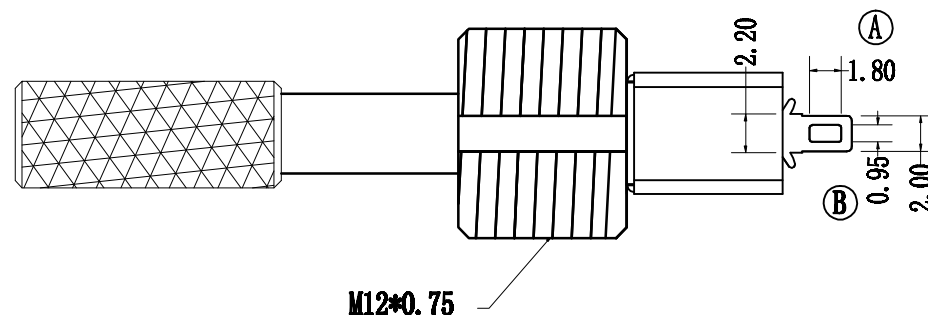


Technical characteristics

SPECIFICATION: 2 A max. @ 28 VDC.
 MECHANICAL LIFE: 40,000 make-and-break cycles.
 CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
 100mA for both silver.
 INSULATION RESISTANCE: 1000 MΩ min.
 DIELECTRIC STRENGTH: 1500 VAC min.
 OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)
 HOUSING: Stainless Steel.
 ACTUATOR: Alloy, Acid Pickling.
 BUSHING: 1215, nickel plated.
 CONTACT/TERMINALS: Copper alloy silver plated.
 RoHS

手柄位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model NO.			
102	ON	NONE	ON
SCHEMATIC		NONE	



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES	.X± 0.4 .XX± 0.25	± 5°	UNIT 单位 mm	SCALE 1:1	
				版本 VERSION	A0	比例尺 SCALE	NONE	2022. 1. 12	TITLE 图名 TOGGLE SWITCH
				核准		核对			DWG NO. 料号
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY 黄泳何	PART NO. 型号 XB-MT-0-102-J102-X000-RS薄