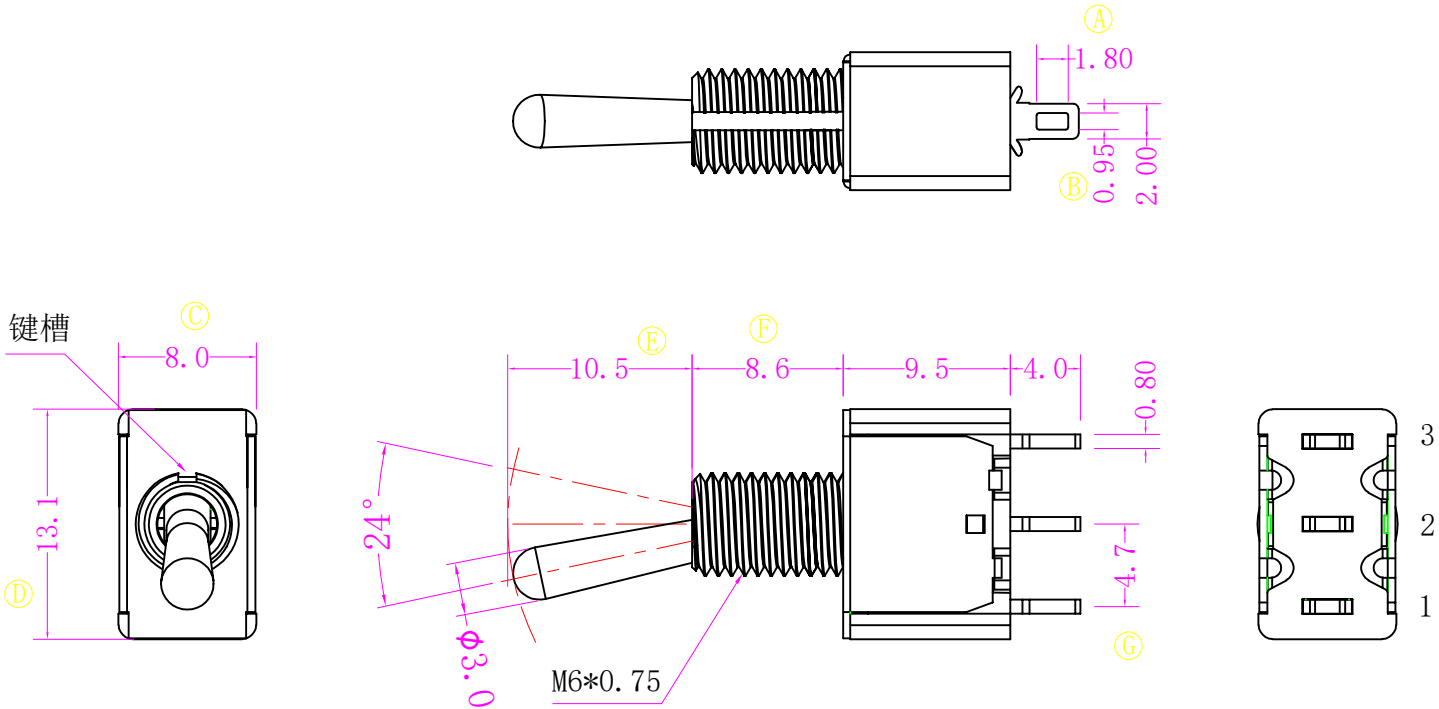


标注：A-G 为重点检测尺寸

Technical characteristics

SPECIFICATION:5 A max. @ 125 VAC.  
2 A max. @ 250 VAC.  
MECHANICAL LIFE:40,000 make-and-break cycles.  
ELECTRICAL LIFE:10,000 make-and-break cycles.  
CONTACT RESISTANCE:20mΩ max.initial @2-4VDC  
100mA for both silver.  
INSULATION RESISTANCE: 1000 MΩ min.  
DIELECTRIC STRENGTH: 1500 VAC min.  
OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)  
HOUSING: Stainless Steel.  
ACTUATOR: Alloy,chrome plated.  
BUSHING: Alloy ,nickel plated.  
CONTACT/TERMINALS: Copper alloy silver plated.  
RoHS

手柄位置及导通端子示意图

|           | POS. 1 | POS. 2 | POS. 3 |
|-----------|--------|--------|--------|
| Model NO. |        |        |        |
| 102       | ON     | NONE   | ON     |
| SCHEMATIC |        | N/A    |        |

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

|         |                         |         |         |               |                   |                |                     |                        |                          |
|---------|-------------------------|---------|---------|---------------|-------------------|----------------|---------------------|------------------------|--------------------------|
|         |                         |         |         | 公差 TOLERANCES | .X± 0.4 .XX± 0.25 | 角度 ± 5°        | UNIT 单位 mm          | SCALE 1:1              |                          |
|         |                         |         |         | 版本 VERSION    | A0                | 比例尺 SCALE NONE | 日期 DATE 2023. 2. 20 | TITLE 图名 TOGGLE SWITCH |                          |
|         |                         |         |         | 核准            |                   | 核对             | 绘图 WSL              | PART NO. 型号            | XB-MT-1-102-A101-M200-RS |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |                   | CHECKED BY     |                     |                        |                          |