


| REV | DESCRIPTION | DESIGNER | DATE |
|-----|-------------|----------|------|
|-----|-------------|----------|------|

| 自由公差 | | |
|---------|------|-------|
| 区分 | 类别 | 公差 |
| 0 | <0.5 | ±0.10 |
| 0.50 | <5 | ±0.15 |
| 5.0 | <10 | ±0.20 |
| 10.0 | <20 | ±0.30 |
| 20.0 | <50 | ±0.40 |
| 未标注R角 | | R0.2 |
| 未标注角度公差 | | ±1' |

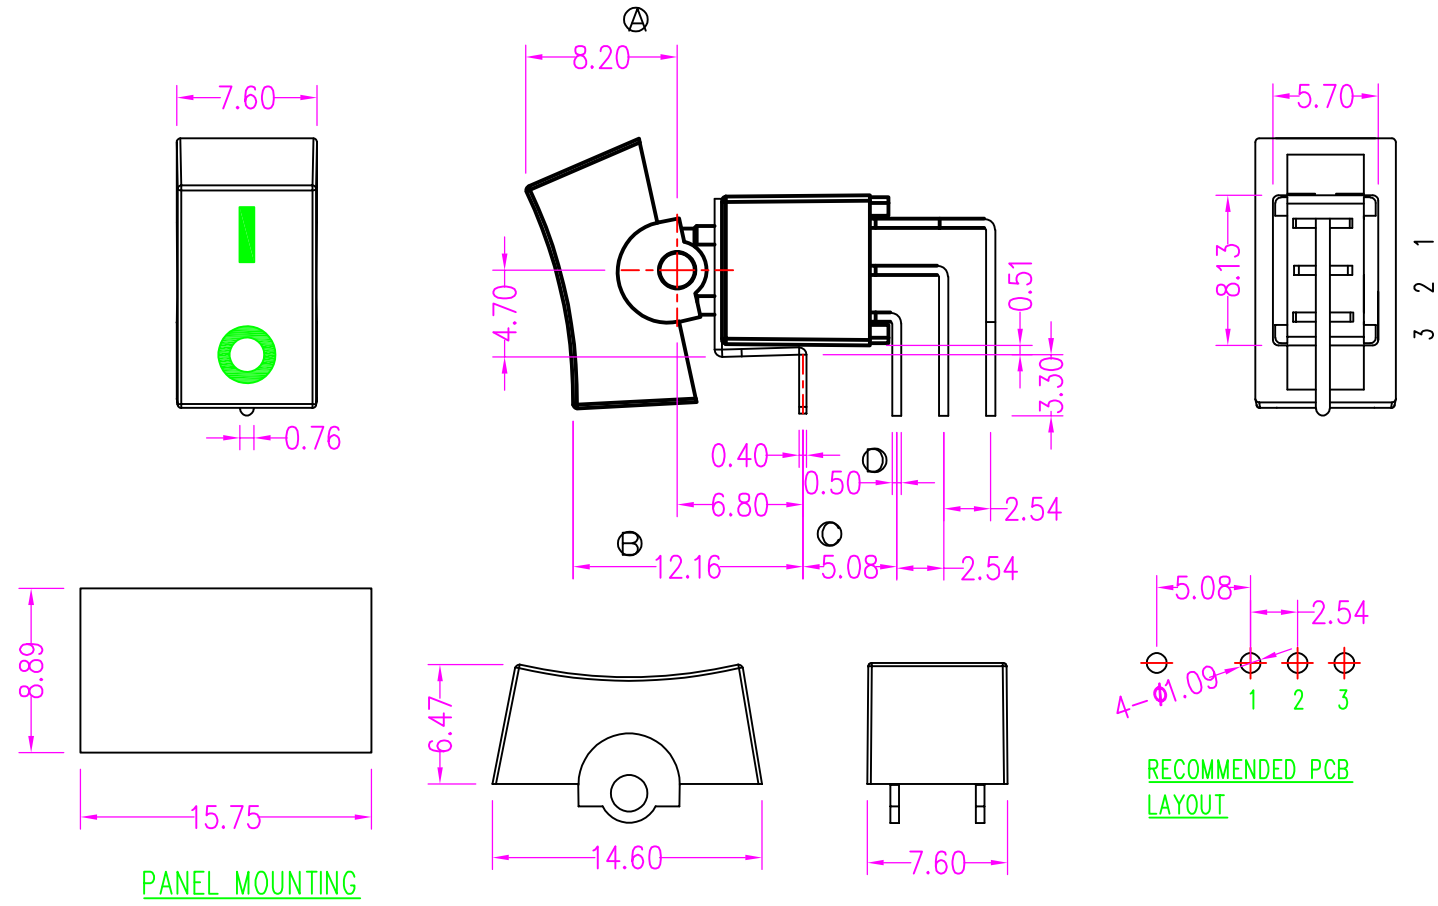

SWITCH FUNCTION

| Model NO. | POS.1 | POS.2 | POS.3 |
|-----------|-------|-------|-------|
| 102 | ON | OFF | ON |
| SCHEMATIC | | | |

SPECIFICATION

1. RATING: 3A 125VAC; 1.5A 250VAC
2. CIRCUIT CRAIT: ON-ON SPDT 3P
3. CONTACT RESISTANCE: 30mΩ Max
4. INSULATION RESISTANCE: DC500V 100MΩ Min
5. WITHSTAND VOLTAGE: AC 1000V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION TEMPERATURE RANGE: -30~+85° C

注: A-D为重点检验尺寸

| NO | NAME | MATERIAL | QTY | FINISHING | NO | NAME | MATERIAL | QTY | FINISHING |
|----|------|----------|-----|-----------|----|------|----------|-----|-----------|
| 1 | 按钮 | PA66 | 1 | 黑色 | 7 | 端子 | H65 | 3 | 镀银 |
| 2 | 外壳 | PA66 | 1 | 红色 | 8 | 切换片 | H65 | 1 | 镀银 |
| 3 | 手柄 | H59 | 1 | 镀镍 | 9 | 底座 | PPA | 1 | 黑色 |
| 4 | 弹簧 | 碳钢 | 1 | 本色 | 10 | | | | |
| 5 | 滑柱 | PA46 | 1 | 黑色 | 11 | | | | |
| 6 | 支架 | H65 | 1 | 镀银 | 12 | | | | |

| | | | |
|-------|-----|------|-----------|
| SCALE | 1:1 | | UNIT: mm |
| CKD | | DWN | 单世佳 |
| APVD | | DATE | 2018-1-27 |

| | |
|-------------------|-----------------------------------|
| SPECIFICATION NO. | |
| TITLE | Miniature Rocker And Lever Switch |
| PART NO. | XB-SA-0-102-A04-0204-WP |
| MATERIAL NO. | |

