
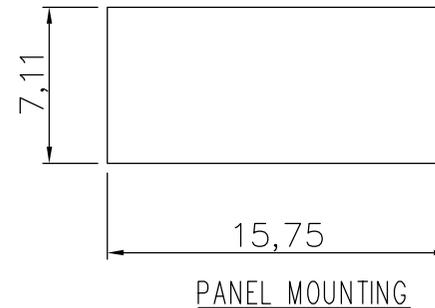
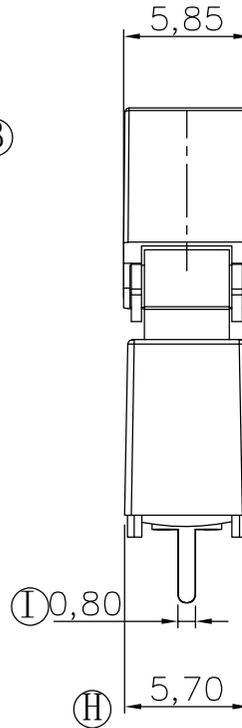
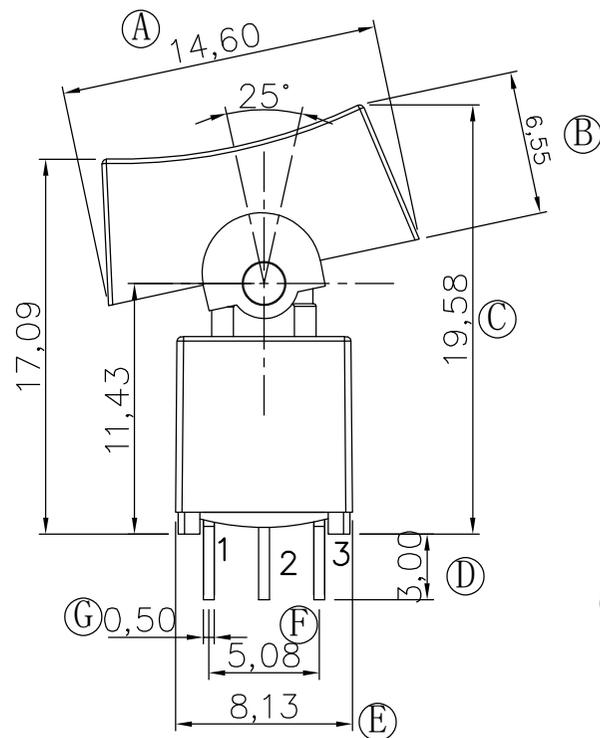


REV	DESCRIPTION	DESIGNER	DATE

自由公差	
区分	公差
0	±0.10
0.50	<5 ±0.15
5.0	<10 ±0.20
10.0	±0.30
20.0	±0.40
50.0	±0.50
未标注R角	R0.2
未标注角度公差	±1'



SPECIFICATION

1. RATING: 3A 120VAC; 1A 250VAC
2. CIRCUIT CRAINT: ON-ON SPDT 3P
3. CONTACT RESISTANCE: 30mΩ Max
4. INSULATION RESISTANCE: DC500V 100MΩ Min
5. WITHSTAND VOLTAGE: AC 1000V 1 Minute
6. LIFE: 10000 cycles at full load;
40000 cycles at without load
7. OPERATION TEMPERATURE RANGE: -30~+85° C

手柄位置及导通端子示意图

Model NO.	POS.1	POS.2	POS.3
123	(ON)	OFF	(ON)
SCHEMATIC		OPEN	

SCALE	1:1		UNIT: mm
CKD		DWN	黄泳何
APVD		DATE	2018-4-16

NO	NAME	MATERIAL	QTY	FINISHING	NO	NAME	MATERIAL	QTY	FINISHING
1	按钮	PA66	1	黑色	7	外壳	PA66	1	红色
2	压簧	碳钢	1	本色	8	基座	PPA	1	红色
3	按柄	黄铜	1	镀镍	9	动触片	黄铜	1	镀银
4	密封胶	环氧树脂	1	灰色	10	中端子	黄铜	1	镀银
5	摆杆	SPCC	1	本色	11	边端子	黄铜	2	镀银
6	滑块	PA46	1	黑色	12				

SPECIFICATION NO.	
TITLE	Sub-Miniature Toggle Switch
PART NO.	XB-SA-0-123-C02-0200-WP
MATERIAL NO.	

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

注: ①-⑩为重点检验尺寸