
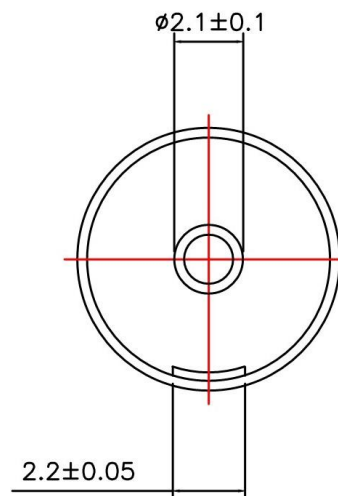
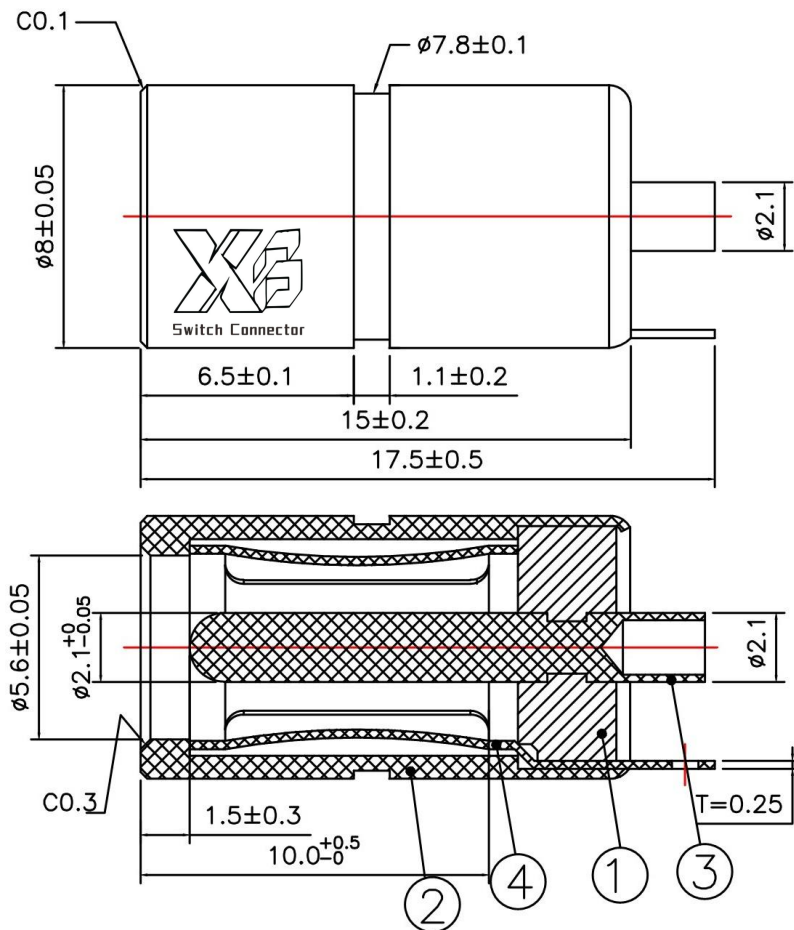



版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20200321
V1.1		5521JL80尾针2.1	5521JL80	June	20220311



Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3—3kgf.
- 4.Salt spray test:72H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
比例 Scale	5:1	xx.:±0.3	6									
视图 Third angle projection		x.x:±0.1	5				 刘伟强	苏伟伦	规格 DESCRIPTION: DC JACK Ø5.5*Ø2.1*17.5			
			4	5521/5*6.6*0.25带尾弹圈	C5191	Ni 40~120µ						
		.xx:±0.05	3	2.08*16实心针	C3604	Ni 40~120µ					 刘伟强	苏伟伦
			2	8*15*6.6管	C3604	Ni 40~120µ						
			1	PLASTIC	PBT+G15BK-V0	BLACK						
			NO.	PART	MATERIAL	PLATING				图号 DRAWN NO:		