



ROHS

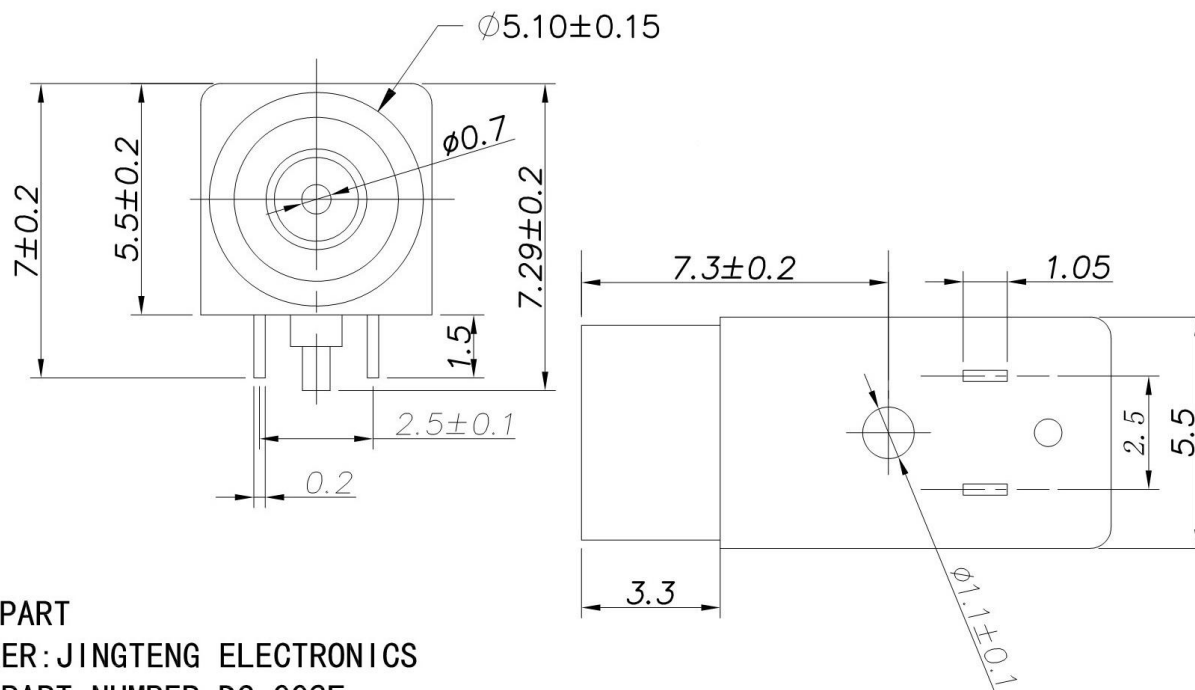


NOTES:

1. SUPPLIED PART
2. MANUFACTURER: JINGTENG ELECTRONICS
3. SUPPLIER PART NUMBER: DC-002F
4. NOMINAL DIMENSIONS PROVIDED BY SUPPLIER. BLOCK TOLERANCE ARE N/A.
5. REFERENCE DIMENSIONS MEASURED FROM PHYSICAL PARTS TO ALLOW CREATION OF 3d MODEL
6. SUPPLIER PROVIDED RATINGS:

CONTACT RESISTANCE: $\leq 0.03 \text{MM} \Omega$
RATED LOAD: 30V DC 0.5A
INSULATION RESISTANCE FORCE: 3N-30N
WITHSTAND VOLTAGE: 500V, AC/MIN
LIFE: 5000 CYCLES
TEMPERATURE: $-40^{\circ} \sim +70^{\circ} \text{C}$



CIRCUIT DIAGRAM

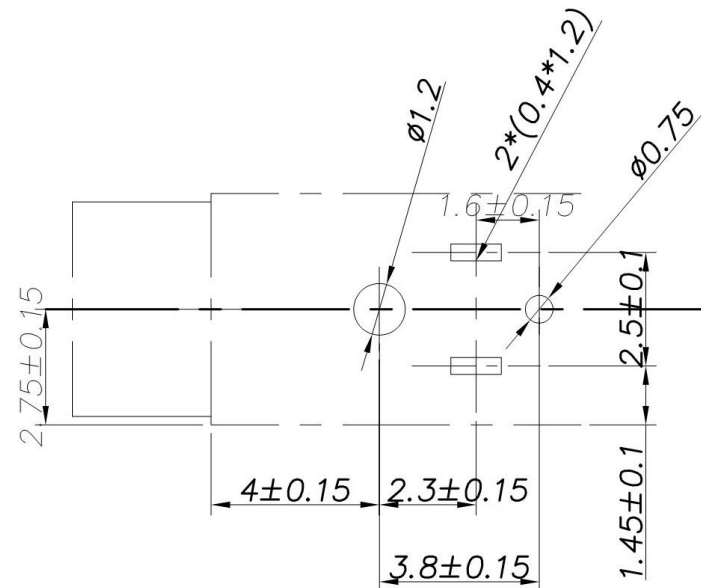

单位 Unit	mm	一般公差 The general tolerance	7	6	5	4	3	2	1	NO.
比例 Scale	5:1	.xx.: ± 0.3								
视图 Third angle projection		.x.x: ± 0.1								
		.xx: ± 0.05								

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	DC JACK
品名 P/N:	XB-DC-002F
图号 DRAWN NO:	