


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

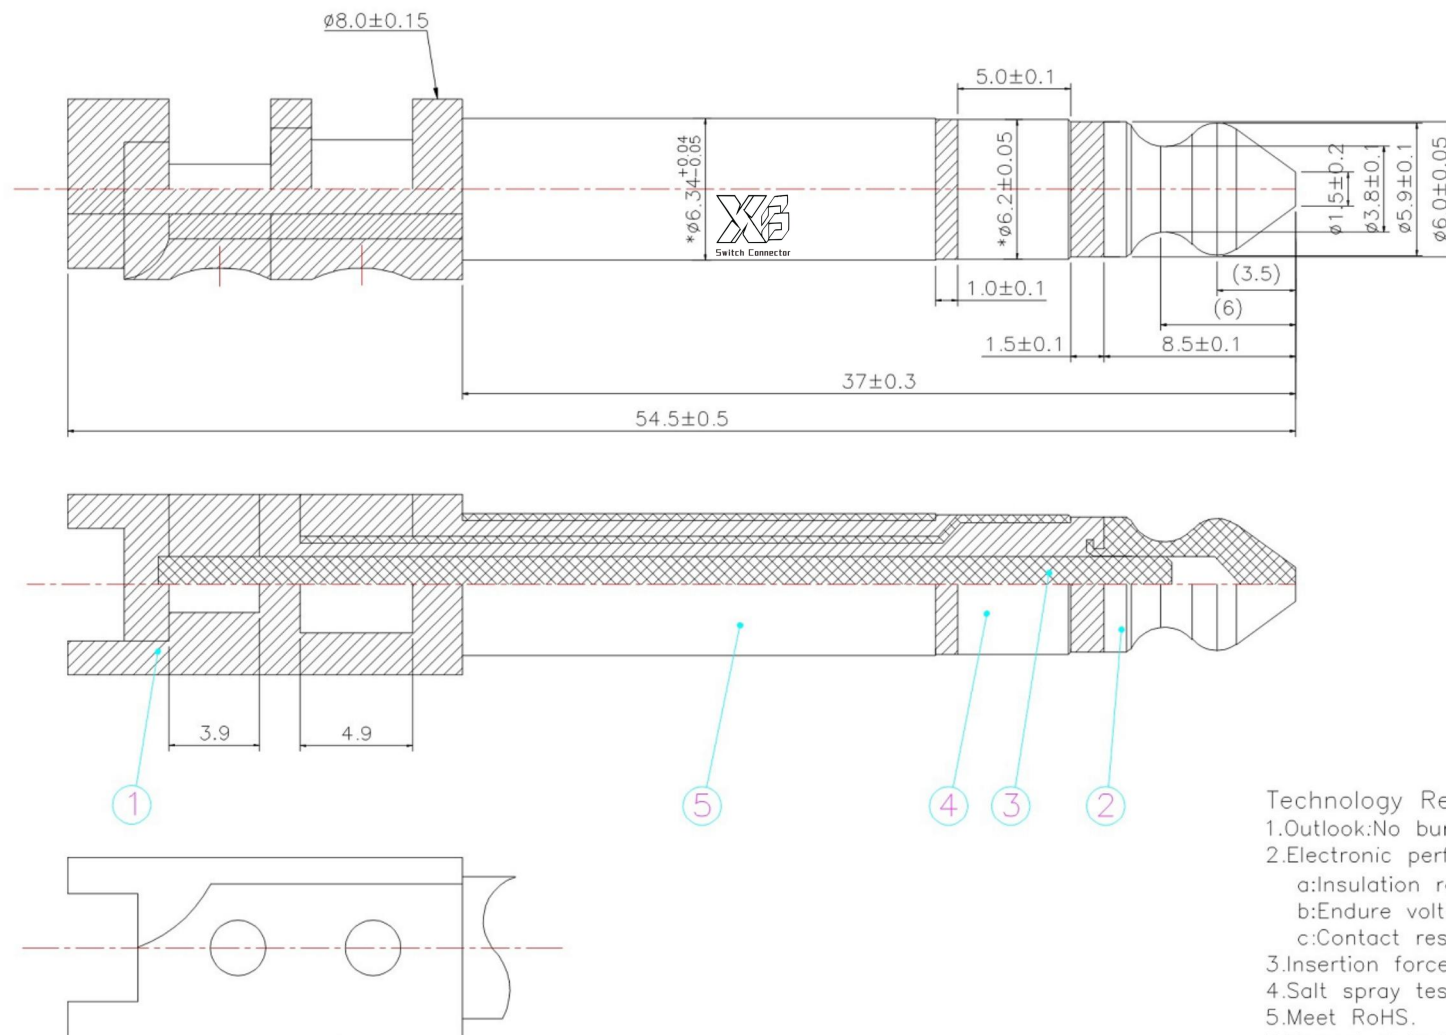

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3–3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

							UNLESS OTHERWISE SPECIFIED TOLERANCES		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
							DECIMALS:		ANGLES:		DWG NO.		Q/XM-CP-RD-XXXX		PART NAME:	
											DESIGN:		Kai		PHONE JACK	
							DIM		TOL		DIM		TOL		PART NO.	
							X.		±0.35		X.		±2°		2018.06.14	
							X.X		±0.30		X.X		±1°		2018.06.14	
							X.XX		±0.20		X.XX		—		2018.06.14	
							X.XXX		±0.10		X.XXX		—		2018.06.14	
															REV.	
															UNIT:	
															SHEET:	
															1/1	

序号	产品编号	产品名称	数量	材料	规格	电镀
4		盖脚	1	磷铜	0.25T	镀银
3		弹片脚	1	镀青铜	0.2T	镀银
2		中脚	3	磷铜	0.2T	镀银
1		底座	1	PPA		黑色

主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-XXXX	PART NAME:
DESIGN:	Kai	PHONE JACK
CHECK:	Lucky	PART NO.
APPROVED	Lucky	XB-P63300540
REV.	A	UNIT:
		mm
		SHEET:
		1/1