



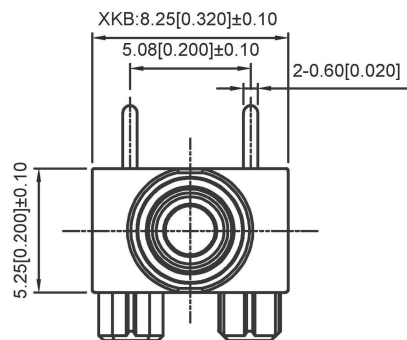


Circuit diagram




Technical Parameters

- 1.Electrical Rating: 0.1A 125/250VAC
0.1A/12VDC
- 2.Electrical lifetime:100 000
- 3.Mechanical lifetime:100 000
- 4.Contact Resistance: ≤50mΩ
- 5.Operating force:1.5N MAX
- 6.Free Position:7.6mm MAX
- 7.Operation Position:7.1±0.3mm
- 8.TTP:5.1mm Min
- 9.Withstand Voltage:Feet and Feet 500V/5S/5mA
Feet and Shell 1500/5S/5mA
- 10.Insulation Resistance:≥100MΩ(Test Voltage 500VDC)
- 11.Proof Tracking Index(PTI):175V

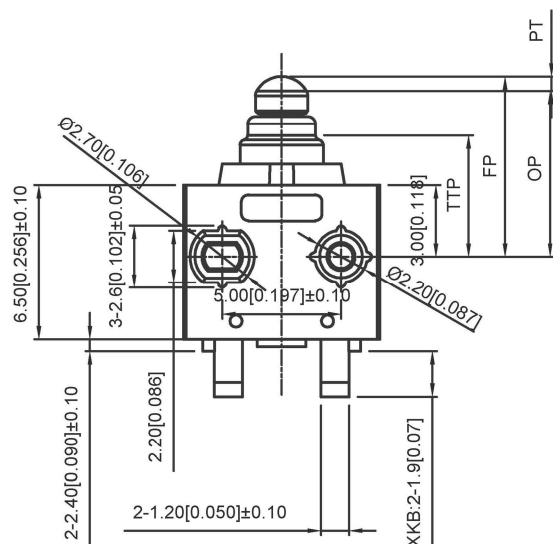

Waterproof grade:IP67

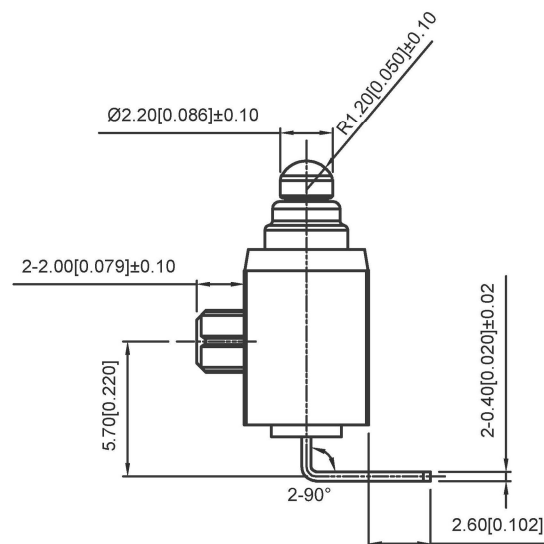

1	Rubber shell	PA66
2	seal ring	Silica gel
3	base	Brass+PA66
4	According to sincerity	POM
5	Contact moving plate	C5191+AgNi10
6	Strut	SUS301-H

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: The micro switch		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.: DF1-CZ-3		
APPD		SIZE: A4			
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISIC
				1/1	A0