
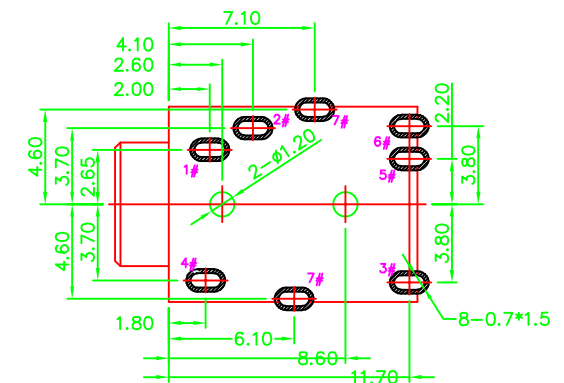

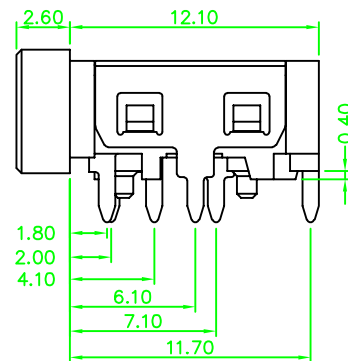
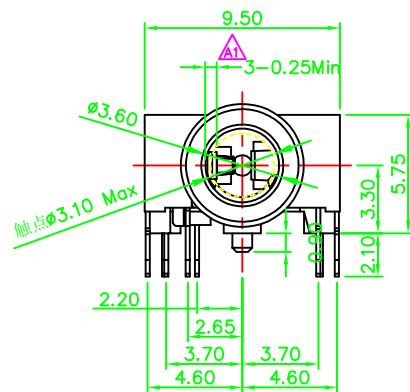

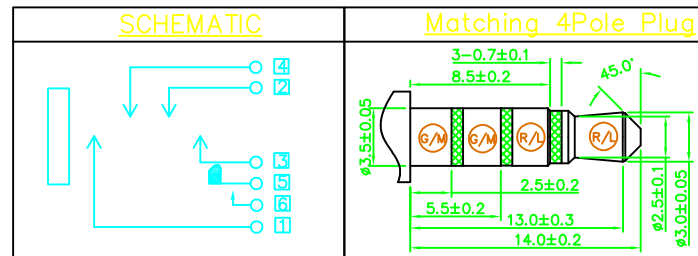



SYMBOL	REVISION	APPROVAL	DATE
A		梁佳锋	2021.02.10

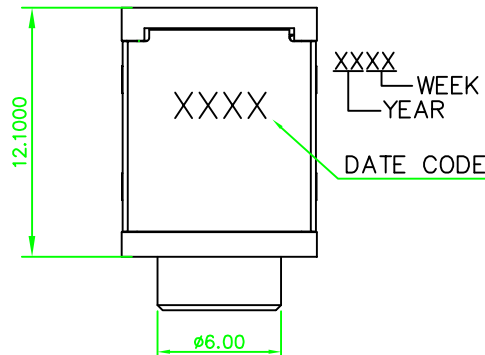

P.C.B LAYOUT TOP VIEW

SPECIFICATION


1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

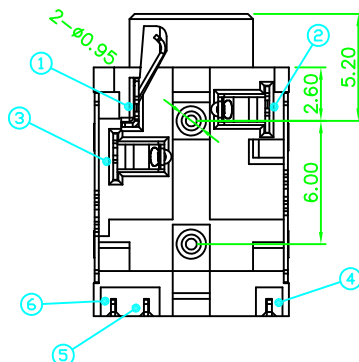

9	HOUSING	1	PA9T	BLACK
8	INSULATOR	1	PA9T	BLACK
7	SHELL	1	SUS301 T=0.20mm	Ni-PLATING
6	TERMINAL-6	1	COPPER ALLOY T=0.20mm	GOLD FLASH ALL. OVER Ni40U"
5	TERMINAL-5	1	COPPER ALLOY T=0.20mm	
4	TERMINAL-4	1	COPPER ALLOY T=0.25mm	
3	TERMINAL-3	1	COPPER ALLOY T=0.20mm	
2	TERMINAL-2	1	COPPER ALLOY T=0.20mm	
1	TERMINAL-1	1	COPPER ALLOY T=0.20mm	PLATING
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED
DIMENSION ARE IN CENTIMETER
TOLERANCE ARE :
FRACTION DECIMALS ANGLES

.X	± 0.3	X'	± 5'
.XX	± 0.2	.X'	± 3'
.XXX	± 0.1	.XX'	± 1'



SCALE 1:1 UNIT mm SIZE A4



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

APPROVALS	DATE	TITLE
DRAWN 梁佳锋	2021/02/10	3.5mm 4PORT AUDIO JACK
CHECKED	2021/02/10	PART NO.
APPROVED 梁佳锋	2021/02/10	XB-J2325R330BE100