

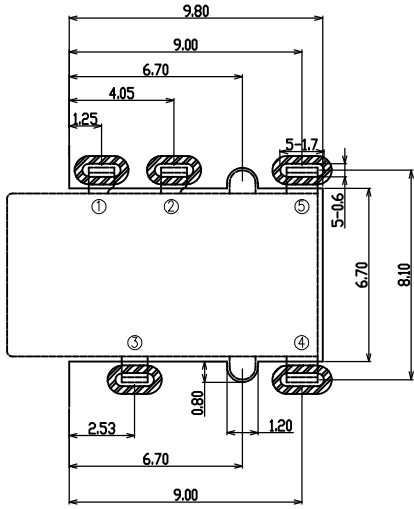

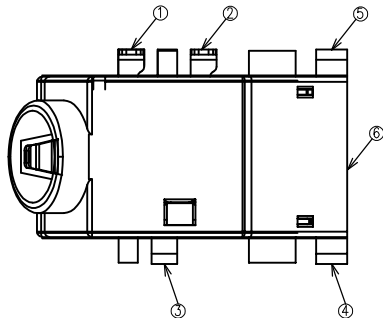
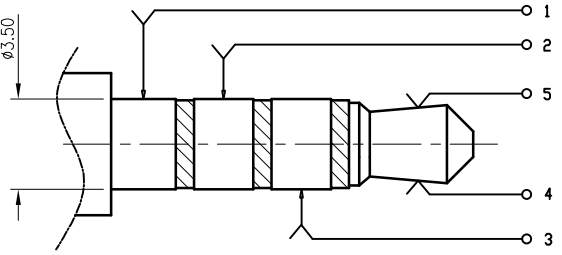
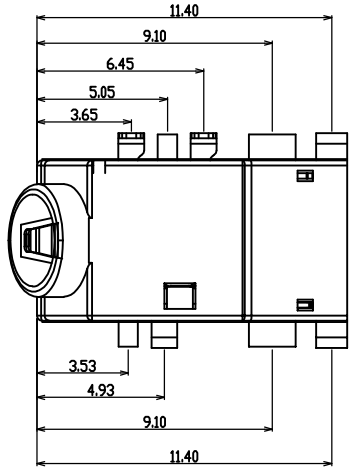
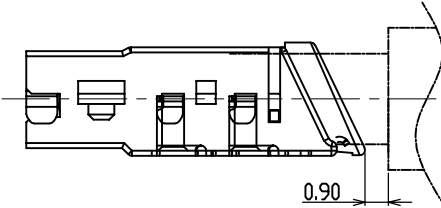


REVISIONS							
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN	CHECKED	APPROVED
A	N/A		INITIAL RELEASE				



PCB LAYOUT TOP VIEW

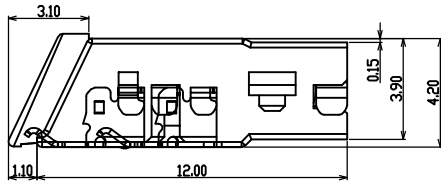

PULG SCHEMATIC

- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 1000Ω MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

⑥	HOUSING	1	HIGHT TEMPERATURE PLASTIC		Black
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGULAR ±3°		DESIGN WZH CHECKED WZH APPROVED LJF		DATE 2012/08/2 DATE DATE		TITLE: XB-J3026R05YX043	
PART NO.		DRAWING NO.		REV.: A		SCALE: 1:1		UNIT: mm	
				SIZE: A4		SHEET: 1/1			

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.