


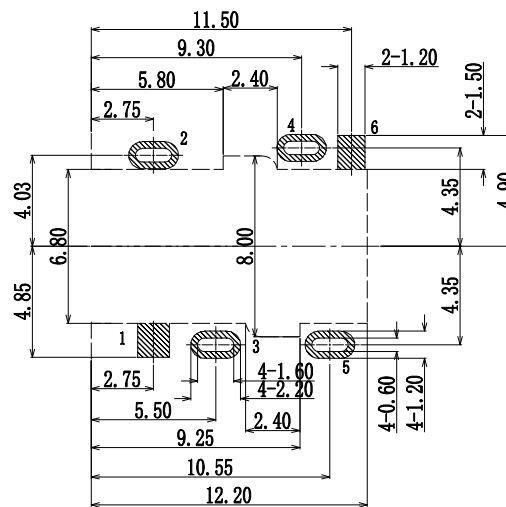
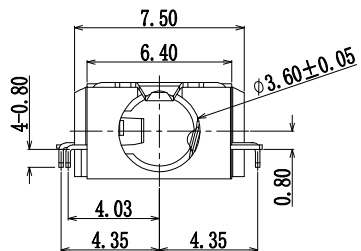



RoHS Compliant

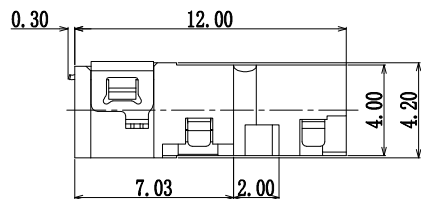


3D VIEW

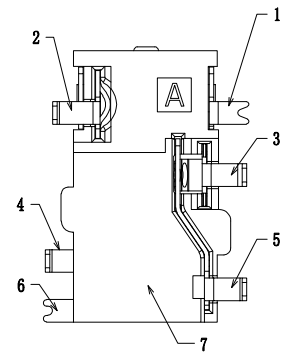

P.C.B LAYOUT
TOP VIEW

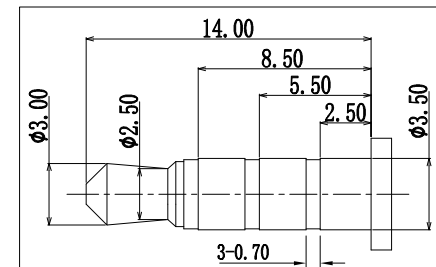


($\varnothing 3.50\text{mm}$ 4 POLE PLUG DETAIL DRAWING)

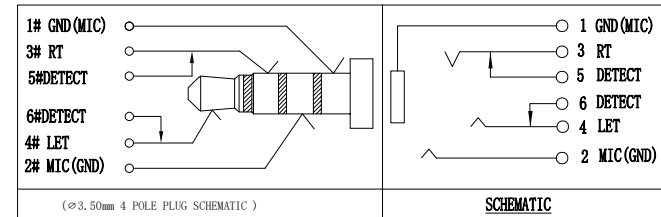

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: $50\text{ m}\Omega$ MAX.;
3. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

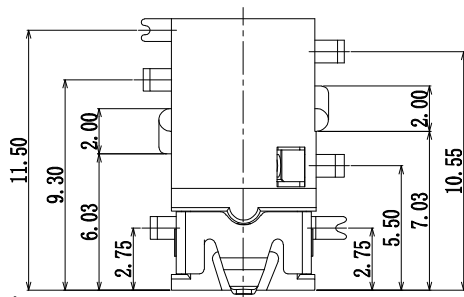

7	HOUSING	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
6	CONTACT 6#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
5	CONTACT 5#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
4	CONTACT 4#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	CONTACT 3#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON SOLDER AREA	T=0.20mm
2	CONTACT 2#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	CONTACT 1#	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH ON OVERALL;	T=0.20mm
NO.	DESCRIPTION	MATERIAL	REMARK

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X. xxx	± 0.10
X. xx	± 0.20
X. x	± 0.30
X.	± 0.50

ANGULAR:

X. xx	$\pm 1^\circ$
X. x	$\pm 3^\circ$
X.	$\pm 5^\circ$



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONI CS CO., LTD.

TITLE: PHONE JACK

P/N: XB-J313VT06G1XB001

客户图

MODEL: _____

DRAW NO.: _____

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/1

					DESIGN	ZB	2019.6.08	
					CHECK	ZB	2019.6.08	
					APPROVAL	YCW	2019.6.08	
N/A	A	NEW DRAWING			2019.6.08	ZB		
ECN NO.	REV.	DESCRIPTION			DATE	CHANGE		