
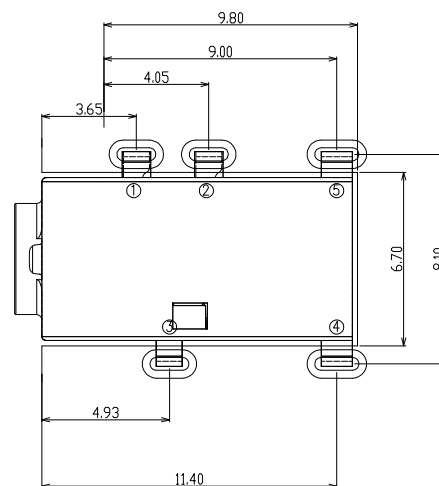
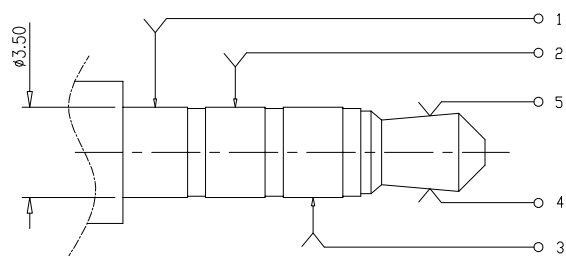

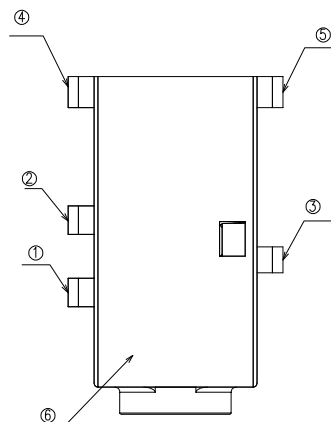


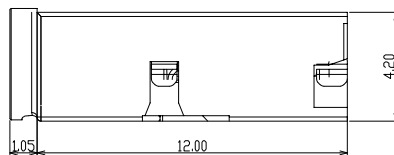

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

⑥	HOUSING	1	HIGHT TEMPERATURE PLASTIC		Black
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARKS

X.xx	$\pm 1^\circ$
X.x	$\pm 3^\circ$
X.	$\pm 5^\circ$

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

客户图

DRAW NO.: _____

mm

	1:1
--	-----

	A4
--	----

1/1

PCB LAYOUT TOP VIEW

					DESIGN	zhangbin	2018. 10. 16	
					CHECK	yangchengwu	2018. 10. 16	
N/A	X	初版发行	2018. 10. 16	zhangbin	APPROVAL	yangchengwu	2018. 10. 16	
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE				