
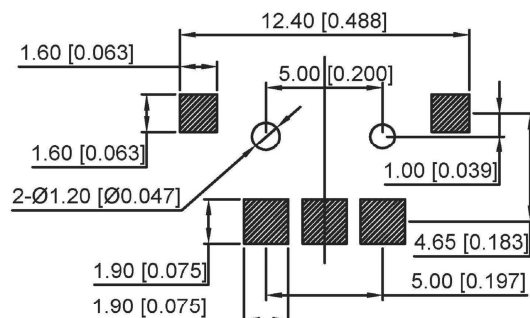
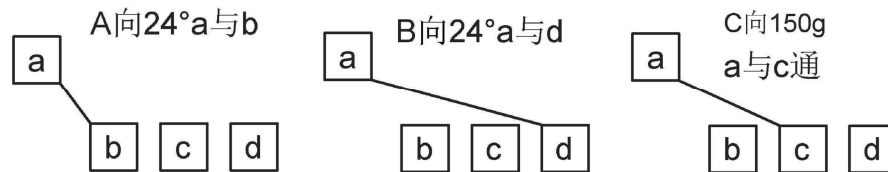


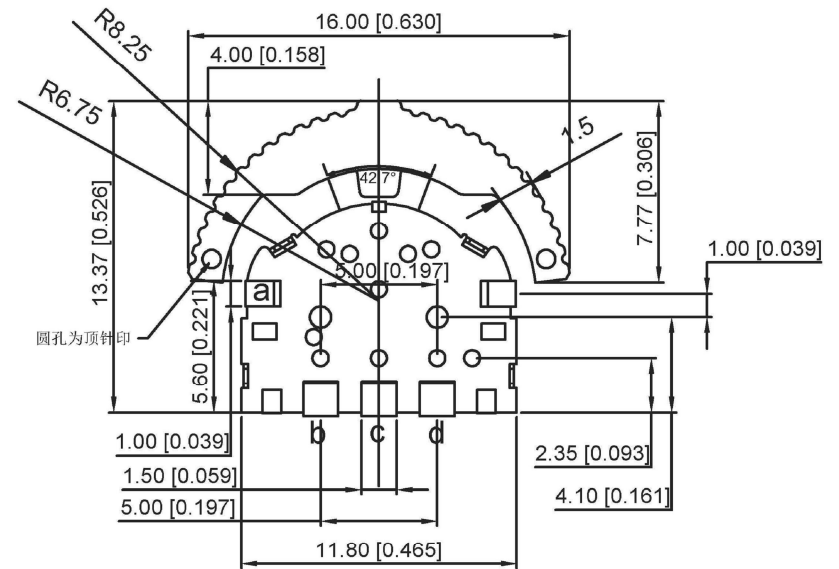

- 1.Rating: DC 5V 10mA
- 2.Contact Resistance:100mΩMAX
- 3.Insulation Resistance:100mΩMIN
- 4.Soldering Temper: 260±5°/5s
- 5.Mechanical Life: 100,000 cycles
- 6.Ever Portion 80±50gf
- 7.Push Portion 205±80gf
- 8.Travel:-24° 0° +24°

		—				—
		—				—
⑤	Terminal	—	5	Phosphor Bronze	Plating silver	—
④	Base	—	1	Lcp		—
③	Spring	—	1	Sus	Natural	—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Ppa		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: MULTI-FUNCTIONAL SWITCH			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4<L ≤ 16	±0.3		APPD		SIZE: A4	TM-2011A			
				16<L ≤ 63	±0.4								
				L > 63	±0.5								
		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES						WEIGHT	SHEET	REVISI
www.alpsr.com www.gdxdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD					1/1	A0	