


TER	ANG	(20°)	(15°)	(15°)	(20°)
①					
②					
③					

CCW ————— CW

CODE TABLE








Circuit Diagram

NOTE:

Operating Force.

lever portion 100 ± 30 gf

Push portion 205 ± 50 gf

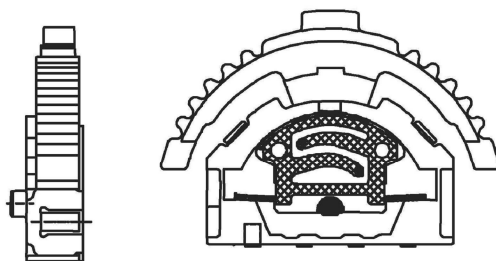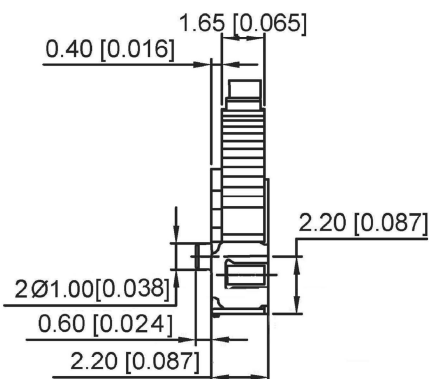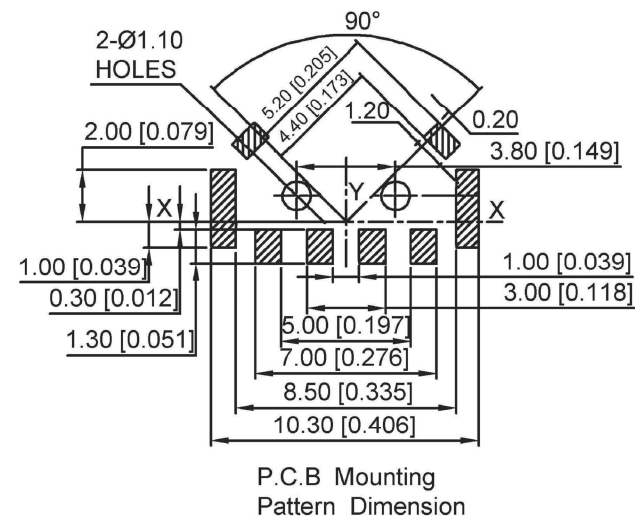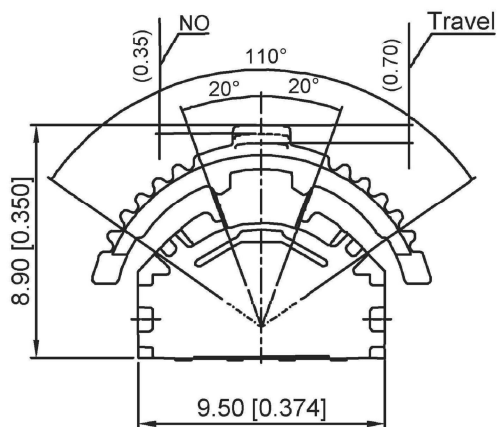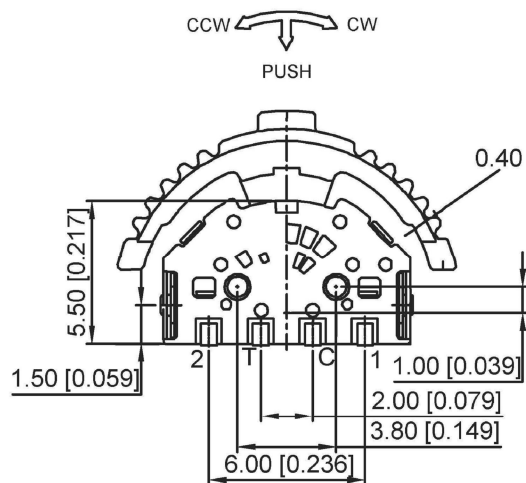

ITEM	PAPT	NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑥	Terminal	—	4	Brass(0.15t)	Plating silver	—	—
⑤	Contact	—	1	F.ag/Brass	Plating silver	—	—
④	Base	—	1	Nylon	—	—	—
③	Spring	—	1	Sus	Natural	—	—
②	Cover	—	1	Sus	Natural	—	—
①	Keystake	—	1	Nylon	—	—	—

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
				UNSPECIFIED TOLERANCES	
	DATE	REVISED	APPROVED		



DSND		SCALE: N/A	MODEL TYPE: MULTI-FUNCTIONAL SWITCH
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	TM-2024A
		WEIGHT	SHEET
		1/1	REVISIT
			A0