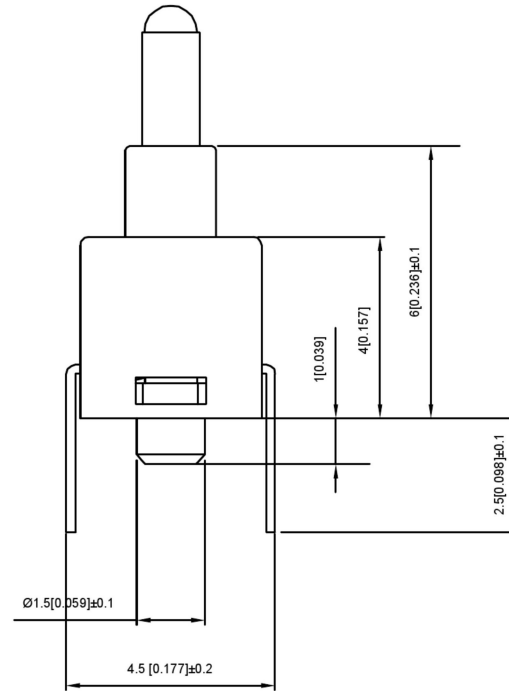
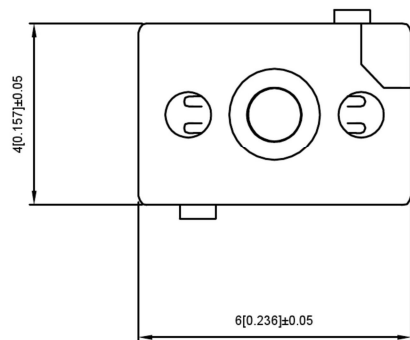
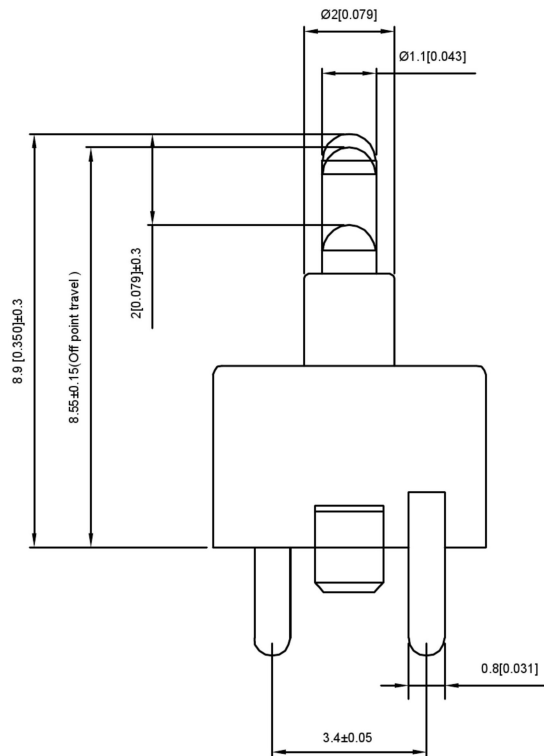


Specifications

CONTACT RATING:0.1A 30 VDC

MECHANICAL ELECTRICAL LIFE:50,000 cycles

CONTACT RESISTANCE:150Ωmax. initial

INSULATION RESISTANCE:100Ωmin. 100VDC

OPERATING TEMPERATURE:-20℃to+70℃

DIELECTRIC STRENGTH:100 volts AC 60 HZ

PACKAGING: Bulk

⑥	Spring		1	Sus	Natural	
⑤	Contact Spring	—	1	Phosphor Bronze	Plating silver	—
④	Terminal	—	2	Phosphor Bronze	Plating silver	—
③	Base	—	1	Nylon		—
②	Cover	—	1	Nylon		—
①	Keystake	—	1	Nylon		—
ITEM	PART NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: DETECT SWITCH			
							DWN		VIEW: 	PART NO.: TM-W-09			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				