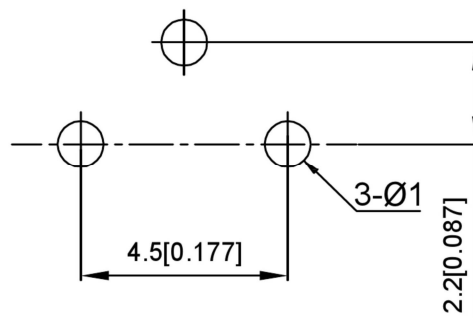
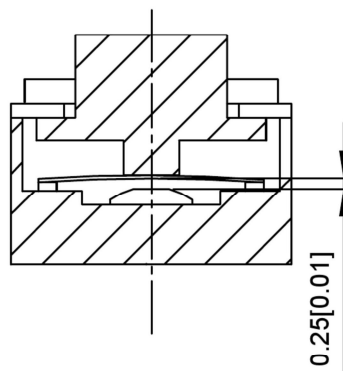
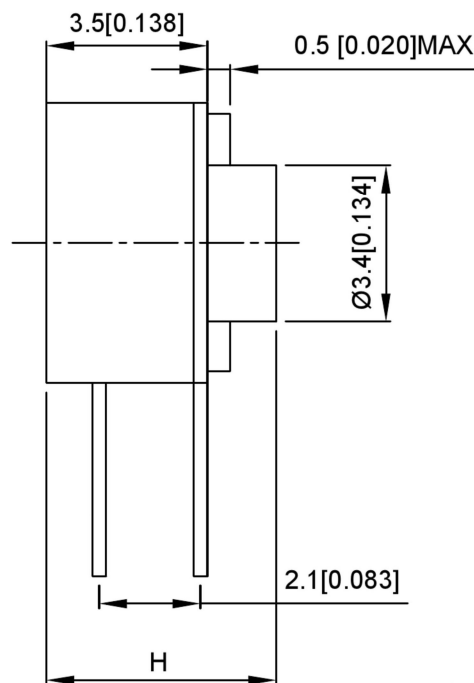
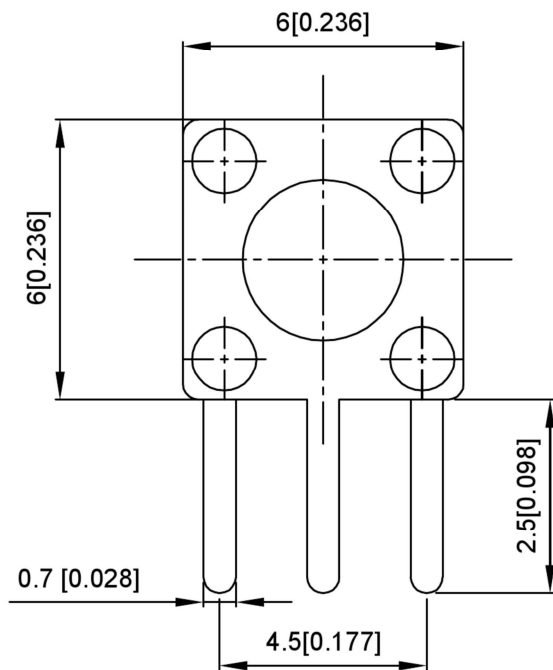


Code-x	H	Code-x	H
A	4.3	O	11.0
B	4.5	P	11.5
C	5.0	Q	12
D	5.5	R	12.5
E	6.0	S	13.0
F	6.5	T	13.5
G	7.0	U	14.0
H	7.5	V	15.0
I	8.0	W	15.5
J	8.5	X	16
K	9.0	Y	16.5
L	9.5	Z	17
M	10.0		
N	10.5		

SPECIFICATION

Contact rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30 °C ~ + 85 °C
 Storage Temp: -30 °C ~ + 80 °C

PAPT NO	TC-1102DE-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x

⑤	Terminal	—	3	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PPA		—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PPA		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				$L \leq 4$	±0.2
				$4 < L \leq 16$	±0.3
				$16 < L \leq 63$	±0.4
	DATE	REVISED	APPROVED	$L > 63$	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		VIEW:	PART NO.: TC-1102DE-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISIT	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD