
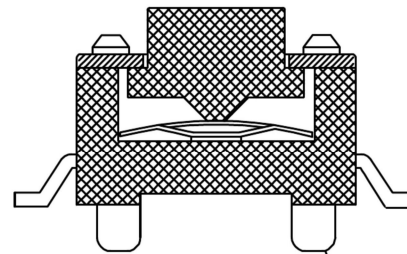



SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1 minute
 Travel: 0.25mm
 Operating Temp: -20°C~+70°C
 Storage Temp: -30°C~+80°C

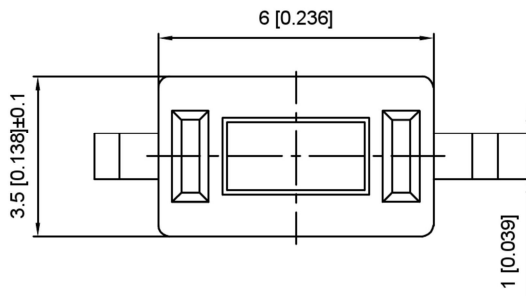

A:With B:without

PAPT NO	TS-1101S-X-X-A-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:A:4.3 B:5.0 C:6.0 D:7.0
Fixed column	A:With B:without
Color	B:black W:white
Pin pitch	A:8.0 B:10.0

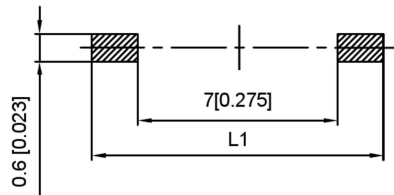

P	L	
A	8.0	
B	10	

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	——
④	Contact	—	1	F.ag/Sus	Natural	——
③	Base	—	1	Lcp		——
②	Cover	—	1	Spcc	Plating Nickel	——
①	Keystake	—	1	Pa46		——
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		VIEW:	PART NO.: TS-1101S-X-X-A-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISIC
			1/1
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD