
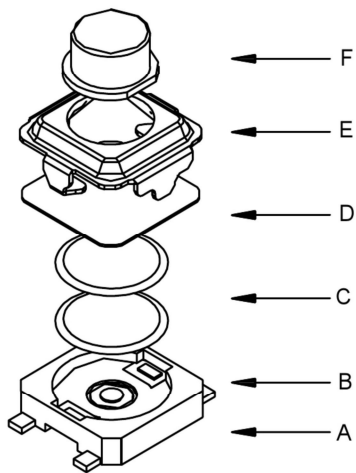
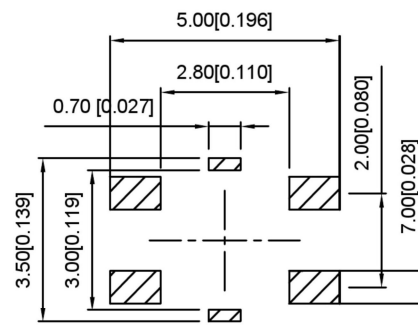



电路图
CIRCUIT DIAGRAM

PAPT NO	TS-1177-X-X-X
Operating Force	B:160gf C:260gf
Height	H:A:1.5 B:2.0
color	B:black W:white

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.2mm
Operating Temp:	-30°C ~ +85°C
Storage Temp:	-30°C ~ +80°C

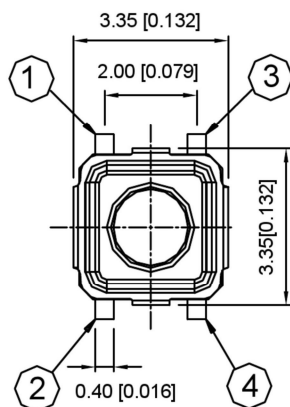

PCB 焊接图

P.C.B WELDING DRAWING

F	Button	LCP	1	Black
E	Panels	SUS	1	
D	Stuff	PI	1	Orange yellow
C	Shrapnel	SUS	2	Silver
B	Noumenon	LCP	1	Black
A	Card	Brass	1	Silver
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLC

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	TACT SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	TS-1177-X-X-X
			DWG NO.: