

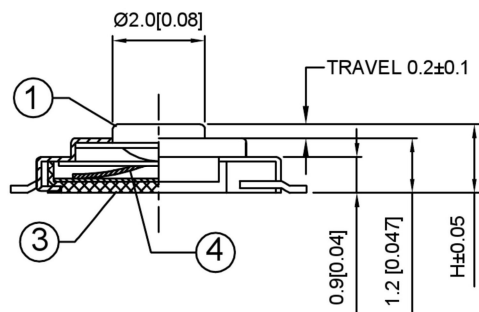



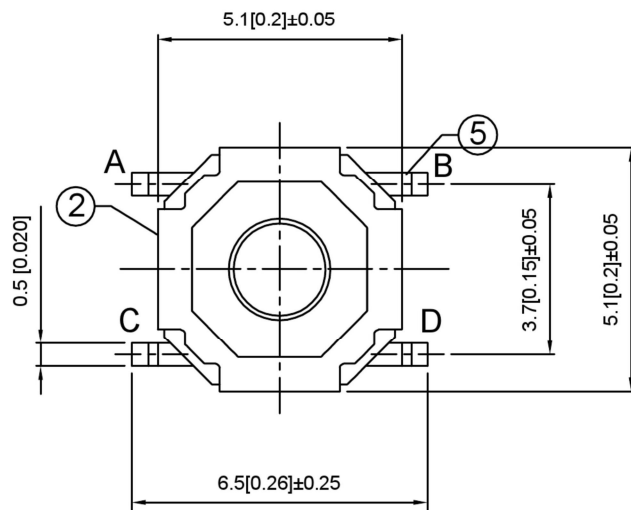

PCB LATOUT
TOP VIEW

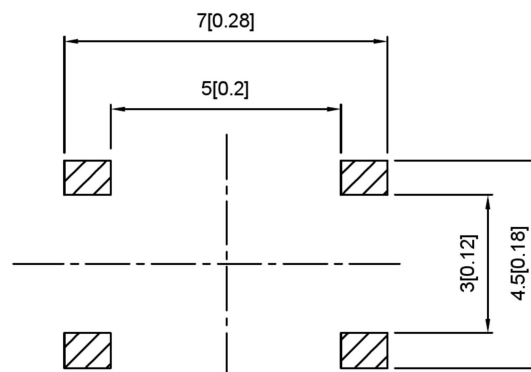

Code-x	H
A	1.5
B	1.6
C	1.7
D	2.0
E	2.5
F	3.0
G	3.5
H	4.0
I	4.5
J	5.0

PAPT NO	TS-1187A-X-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x
Fixed column	A:PA46 B:Brass

SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30℃~+85℃
 Storage Temp: -30℃~+80℃

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Sus	Plating Nickel	—
①	Keystake	—	1	Pa46/Brass	—	—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°
				$L \leq 4$	±0.2
				$4 < L \leq 16$	±0.3
				$16 < L \leq 63$	±0.4
	DATE	REVISED	APPROVED	$L > 63$	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	TACT SWITCH
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	TS-1187A-X-X-X
			DWG NO.:
			WEIGHT
			SHEET
			REVISIC
			1/1
			A0

DONG GUAN XI BANG ELECTRONIC CO., LTD