

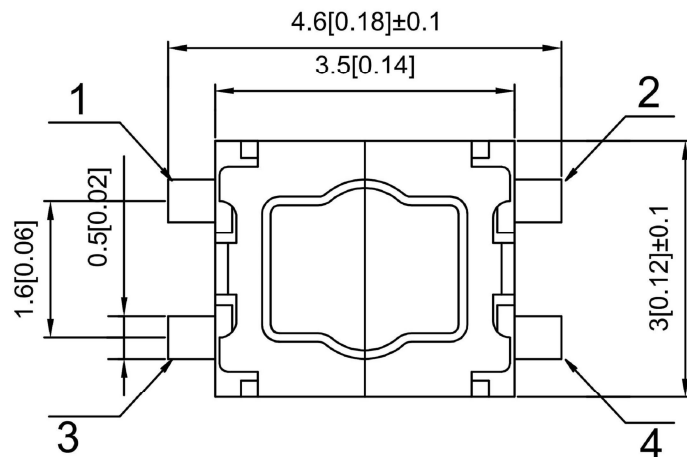




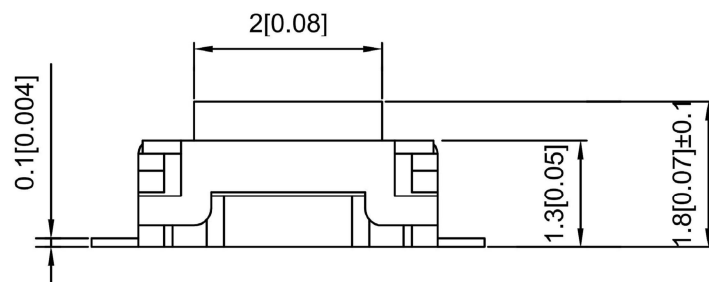


SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃



PAPT NO	TS-1809SM-X
Operating Force	A:100gf B:160gf C:260gf

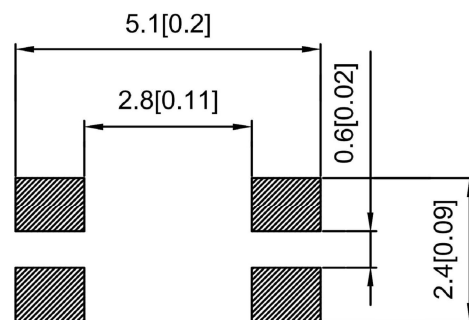

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp	—	—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Pa46	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH			
							DWN		VIEW: 	PART NO.:			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4	TS-1809SM-X			
											WEIGHT	SHEET	REVISIC
												1/1	A0
						DONG GUAN XI BANG ELECTRONIC CO., LTD							