
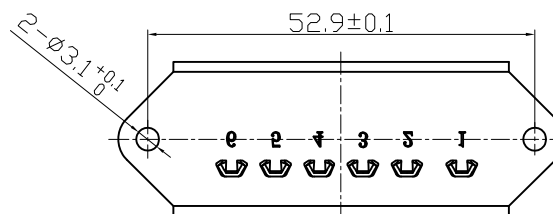
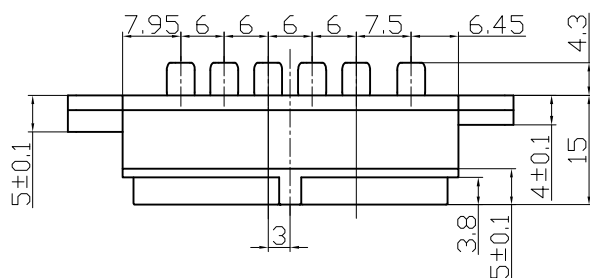

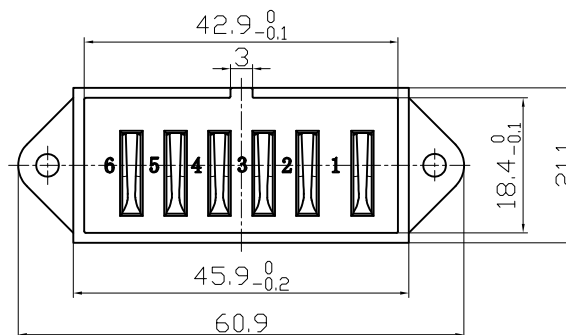


Rohs

受控文件

REV.	DESCRIPTION	DRAW.	DATE.

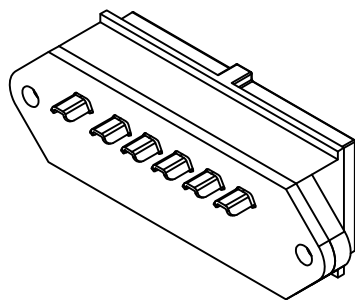

Material:
Insulator : NYLON (UL94V-0)
Contact : Phosphor Bronze
Contact Plated : Nickel
Specification:
Current Rating : 15A
Voltage Rating : 24V
Contact Resistance : 100m Ω
Insulation Resistance : 500M Ω
Dielectric Voltage : 1500V
Operating Temperature : -25°~85°

大电流连接器



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV:	01	料号: XB-B10-M6	TITLE: 刀式电池连接器	DESIGN		DATE	
SIZE:	A4			DRAWING		DATE	
SCALE: 1:1	UNIT: mm	X.	±0.20	CHECK		DATE	
SHEET: 1/1		X.x	±0.15	SCALE	1:1	PAGE	1 OF 1
		X.xx	±0.10				
		ANGULAR	±2°				

PART NO: XB-B10-M6母座