

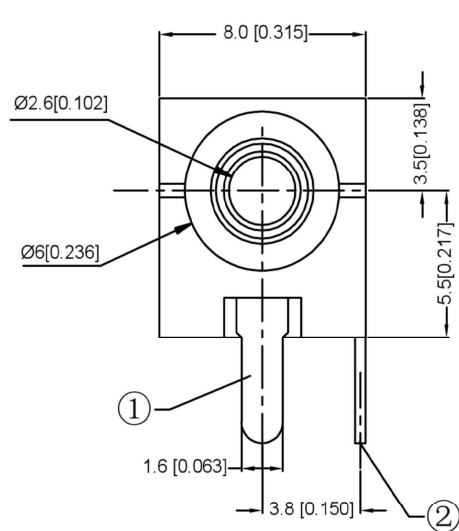
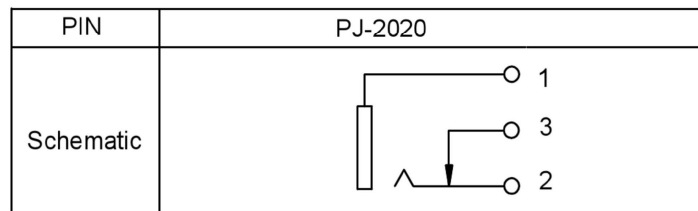


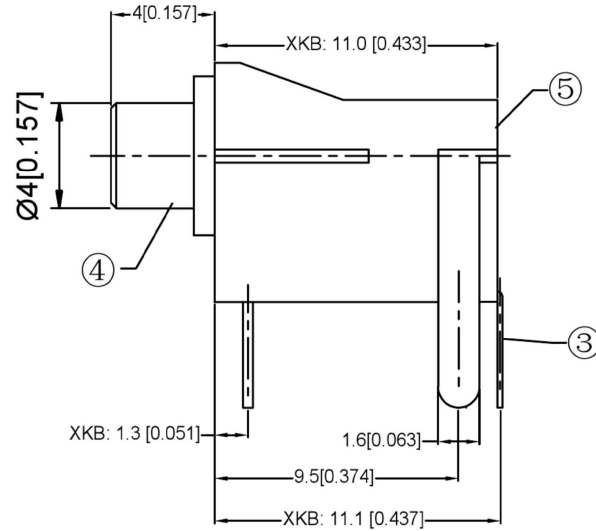

PCB

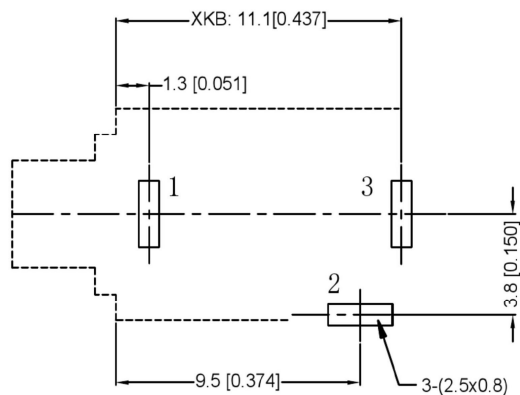

SPECIFICATION

产品规格

1. Rating: DC 30V 0.5A

额定值: DC 30V 0.5A

2. Contact resistance : <0.03 ;

接触电阻: <0.03 ;

3. Insulation resistance: >100MΩ(DC250V)

绝缘电阻: >100MΩ(DC250V)

4. Withstand voltage : 500VAC;

耐受电压: 500VAC;

5. Insertion and extraction force: 3-20N;

插拔力: 3-20N;

6. life test: 5,000 cycles.

寿命试验: 5000次循环.

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PA10T	

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	3.5 PHONE JACK
CHKD		UNIT: mm/in	PART NO.: PJ-2020
APPD		SIZE: A4	DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0