
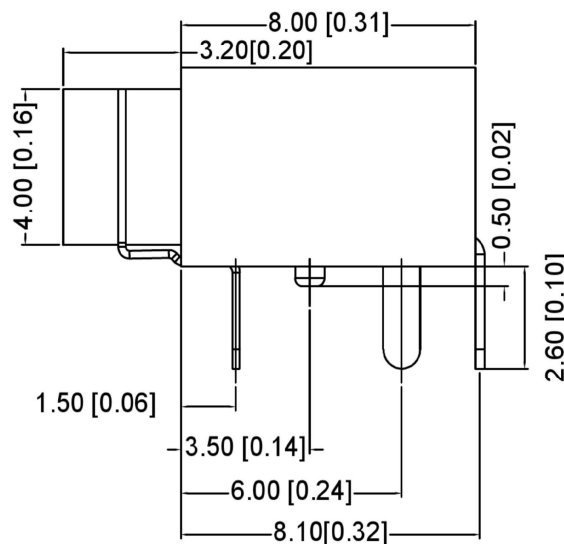


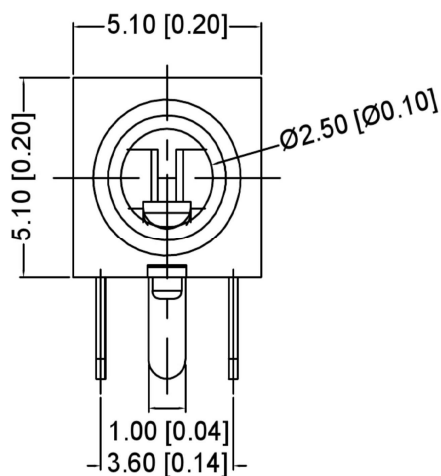

NOTES:

1.ELECTRICALCHARACTERS:

1-1.RATING:DC 30V 0.5A:

1-2.CONTATCT RESISTANCE:<30mΩ;

1-3.INSULATION RESISTANCE:>100MΩ DC500V;




1-4.WITHSTANDING VOLTAGE:AC 500V 1min;

1-5.LIFE:5.000CYCLES:

2.MECHANICALCHARACTERISTICS:

2-1.INSERTION&EXTRACTION FORCE:3~30N:

2-2.OPERATING TEMPERATURE:-30°C~+70°C:

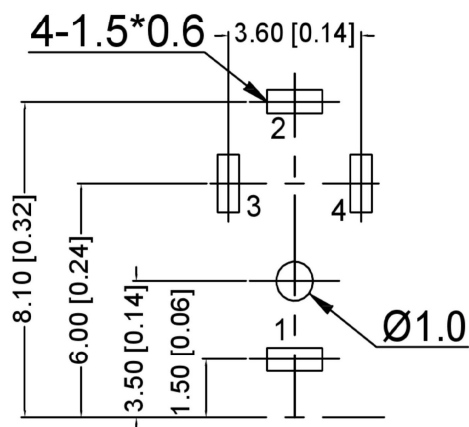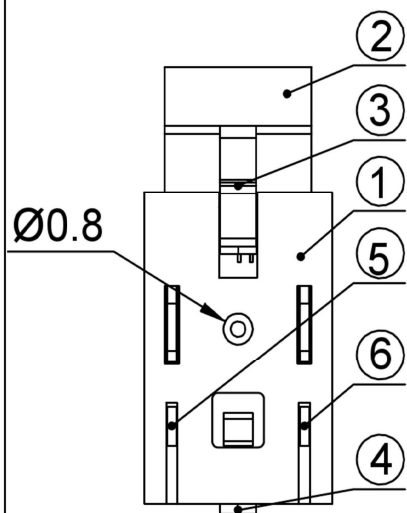

PCB HOLES(TOP VIEW)

GENERAL TOLERANCE:0.1MM

⑤	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
④	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
③	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
②	AXLE SLEEVE	1	H59		CuSn	PLATED
①	HOUSING	1	PA66			BLACK

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGLAR ±5°
				L ≤ 4 ±0.2
				4 < L ≤ 16 ±0.3
				16 < L ≤ 63 ±0.4
				L > 63 ±0.5
www.alpsr.com www.gdxdz.com www.xbswitch.com				



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW: ①	2.5 PHONE JACK
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	PJ-210B
		DWG NO.:
	WEIGHT	SHEET
		1/1
		REVISION
		A0