




P.C.B LAYOUT MOUNTING PATTERN

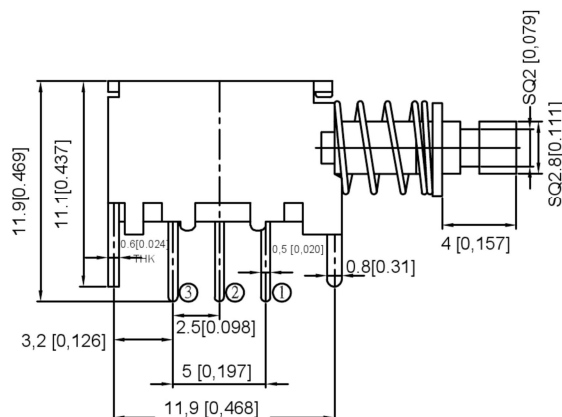

SCHEMATIC (NON-SHORTING)

FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 3.0mm to latch.

SPECIFICATIONS

1.ELECTRICAL

● Contact rating	0.3A, 50VDC
● Contact resistance	50mVMax.
● Insulation resistance	100MVMIn. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

2.MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Operating: -15°C to +55°C Storage: -25°C to +65°C
● Operation force	250±80gf
● Stroke	Lock Stroke: 3.0±0.3mm Full Stroke: 3.5±0.3mm
● Operating life	full load: 1x10 ⁴ cycles no load: 1x10 ⁵ cycles

PAPT NO	
OPERATION	W:NO LOCK Z:LOCK

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑦	Bottom plate	—	1	Phenolic Resin	Natural	—
⑥	Contact	—	1	Phosphor bronze	ag Plated	—
⑤	Terminal	—	3	Brass	Plating silvering	—
④	Spring	—	1	Sus	Natural	—
③	Base	—	1	Spcc	Plating Nickel	—
②	Crochet Needle	—	1	Sus	Natural	—
①	Keystake	—	1	Pa66		—

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxidz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: KEY SWITCH
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISIC	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD