
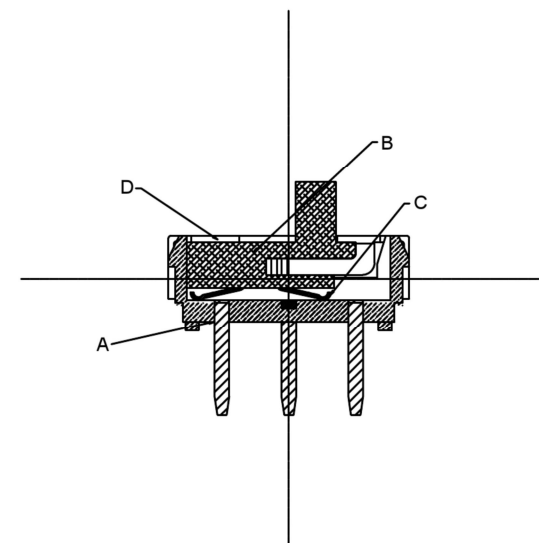
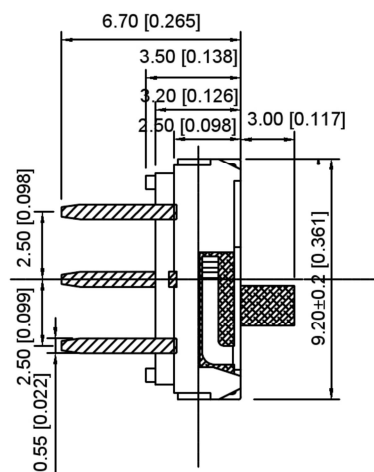
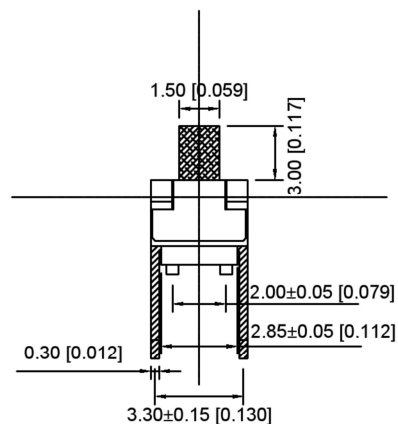
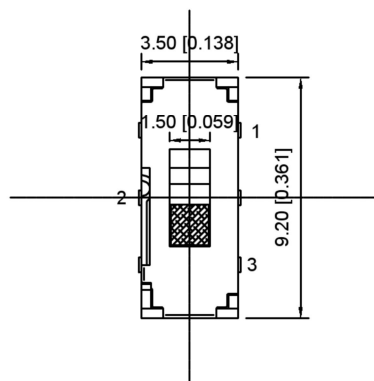



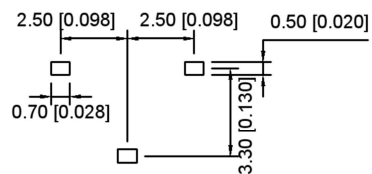

NOTE:

Rating:DC 12V 50mA
Insulation resistance:100mΩ(DC100V)
Withstanding voltage:AC100V/minute
Operating temperature:-10℃~+60℃
Force:200gf±100gf
Lifetime:10000 Cycles

PAPT NO	L
SS-3235D-01-L1	2.0
SS-3235D-01-L2	3.0
SS-3235D-01-L3	4.0
SS-3235D-01-L4	5.0

Lid	1	SUS	Silvery white
Contact spring	2	Phosphor Bronze	Silver plating
Keystake	1	PPA	Black
Base	1	PPA Brass	Black Silver plating
PAPT NAME	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SS-3235D-01-X
CHKD		UNIT: mm/in	DWG NO.: X-SS-3235D-01-X
APPD		SIZE: A4	
		WEIGHT	SHEET
		1/1	REVISIC A0

DONG GUAN XI BANG ELECTRONIC CO., LTD