

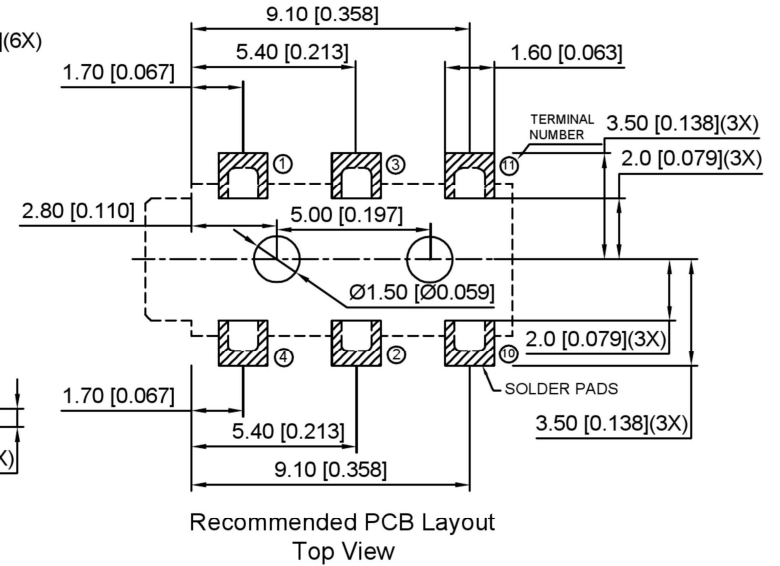
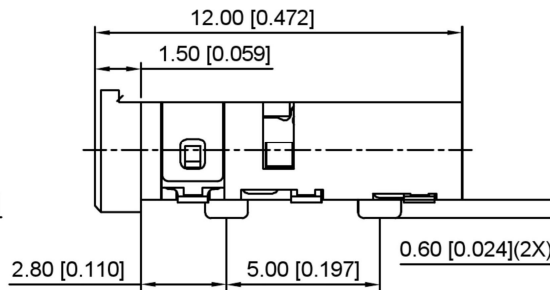
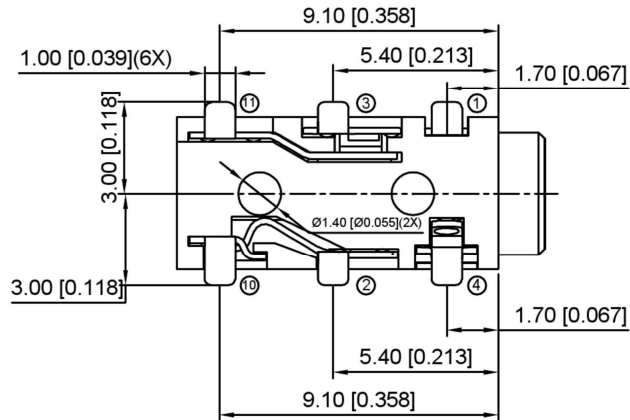

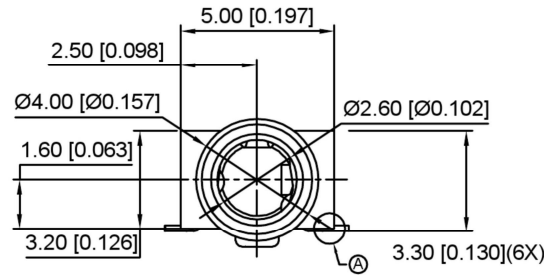


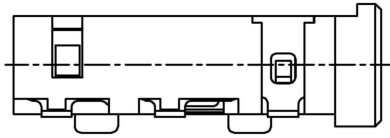

Model No.	PJ-242A-SMT	PJ-242B-SMT	PJ-242C-SMT	PJ-242D-SMT
Schematic				
PIN				
1	sleeve	sleeve	sleeve	sleeve
2	tip	tip	tip	tip
3	ring 1	ring 1	ring 1	ring 1
4	ring 2	ring 2	ring 2	ring 2
10	NP	tip switch	NP	tip switch
11	NP	NP	ring 1 switch	ring 1 switch



	MATERIAL	PLATING
terminal 1	Phosphor Bronze	Gold
terminal 2	Phosphor Bronze	Gold
terminal 3	Phosphor Bronze	Gold
terminal 4	Phosphor Bronze	Gold
terminal 10	Phosphor Bronze	Gold
terminal 11	Phosphor Bronze	Gold
plastic	High Temp. Thermoplastic	

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.:		
				4<L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16<L ≤ 63	±0.4		APPD		SIZE: A4	PJ-242X-SMT		
				L > 63	±0.5							
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0