

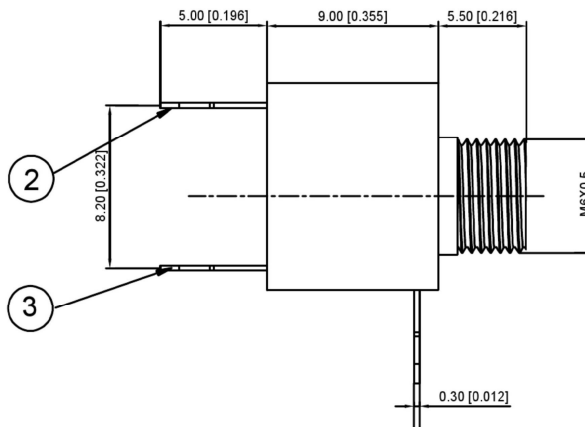
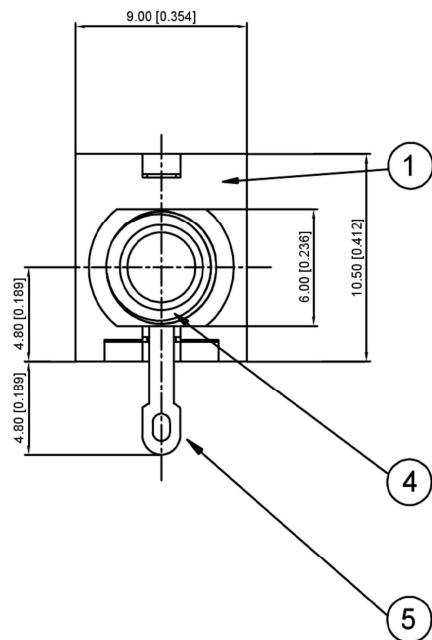




Voltage rating:30V AC/DC
 额定电压:30V AC/DC
 Current rating:0.5A
 额定电流: 0.5A
 Contact resistance: $\leq 30\text{m}\Omega$
 接触电阻: $\leq 30\text{m}\Omega$
 Withstanding voltage: $\geq 500\text{V AC/minute}$
 耐压: $\geq 500\text{VC/分钟}$
 insertion and extraction force : 3-20N
 插拔力: 3-20N
 Temperature range:-30℃--+70℃
 使用温度: -30℃--+70℃
 Life:5000
 寿命: 5000

MODEL NO.	PJ-301M-2-	PJ-301M-3-
DIA	NON-THREAD Ø6.0	
SCHEMATIC		
	B:black Y:yellow	

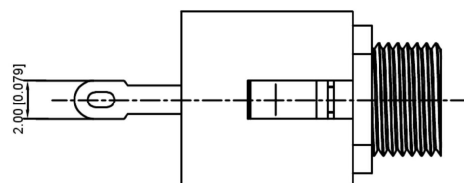

	MATERIAL	PLATING
terminal 2	BRASS	tin
terminal 3	BRASS	tin
terminal 4	Phosphor Bronze	tin
terminal 5	BRASS	
plastic	PA	

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGULAR $\pm 5^\circ$
				$L \leq 4$ ± 0.2
				$4 < L \leq 16$ ± 0.3
				$16 < L \leq 63$ ± 0.4
				$L > 63$ ± 0.5
www.alpsr.com www.gdxdz.com www.xbswitch.com				



DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-301M-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET 1/1
			REVISION A0