
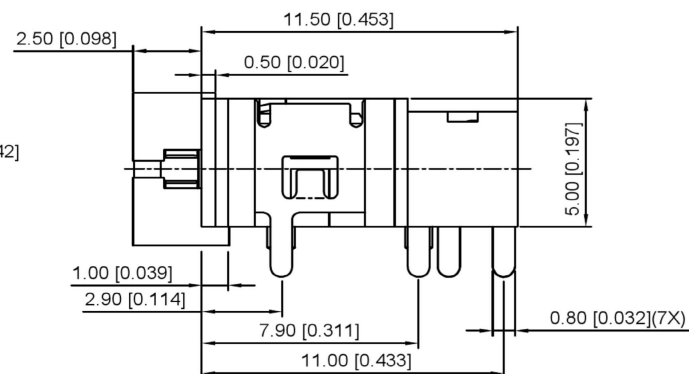

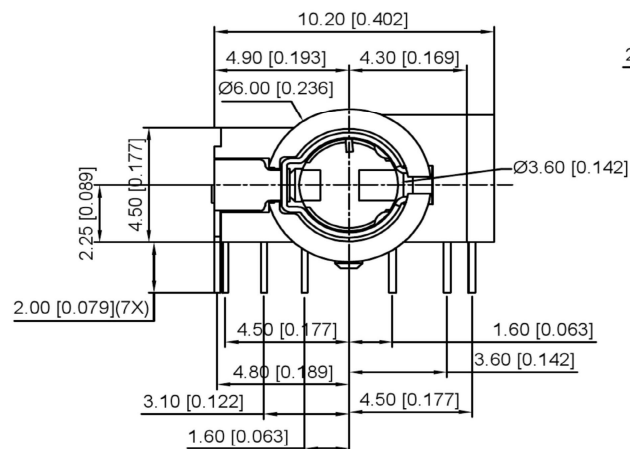
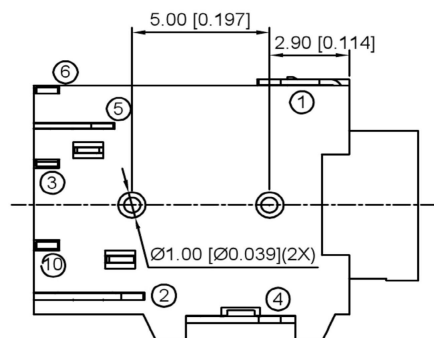


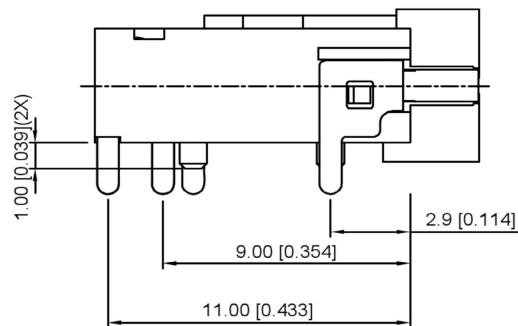


MODEL NO.	PJ-3020	PJ-3021	PJ-3022	PJ-3023
SCHEMATIC				

SPECIFICATION:

- 1.RATING:DC30V 0.5A;
- 2.CONTACT RESISTANCE:≤50mΩ ;
AFTER LIFE TEST:≤100mΩ;
- 3.INSULATION RESISTANCE:≥100mΩ(DC250V);
AFTER LIFE TEST:≤50mΩ;
- 4.WITHSTAND VOLTAGE:500V AC;
- 5.INSERTION AND EXTRACTION FORCE:3-30N;

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Phosphor Bronze	silver
terminal 4	Phosphor Bronze	silver
terminal 5	Phosphor Bronze	silver
terminal 6	Phosphor Bronze	silver
terminal 10	Phosphor Bronze	silver
plastic	High Temp. Thermoplastic	

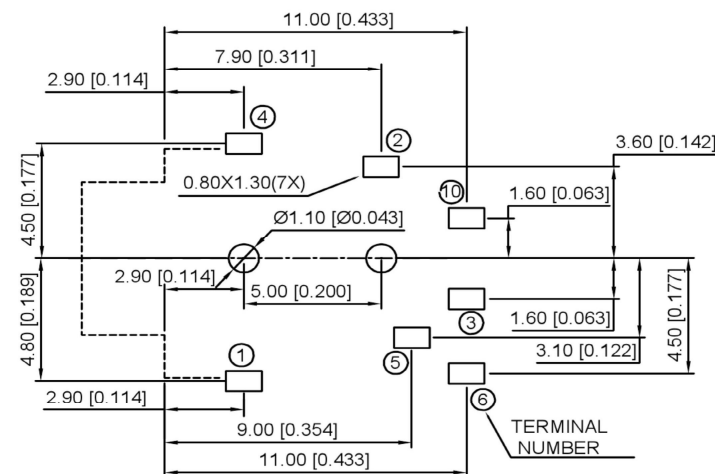

PCB LAYOUT
(BOTTOM VIEW)

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
REVISIONS					
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	2.5 PHONE JACK
CHKD	UNIT: mm/in	PART NO.: PJ-302X
APPD	SIZE: A4	DWG NO.:
		WEIGHT
		SHEET
		REVISION
		1/1
		A0