




Temperature :-20~70C
 Rated Load: DC 30V 0.3A
 Contact Resistance :<0.03
 Insulation Resistance: >100M
 Withstand Voltage :AC500V(50Hz)/min
 Actuating Force :2.2~30N
 Life :3000N

PIN	PJ-305-X	
Schematic		G:Green R:Red

	MATERIAL	PLATING
terminal 1	Brasse	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
terminal 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
plastic	Pbt	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L ≤ 16	±0.3
				16<L ≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					

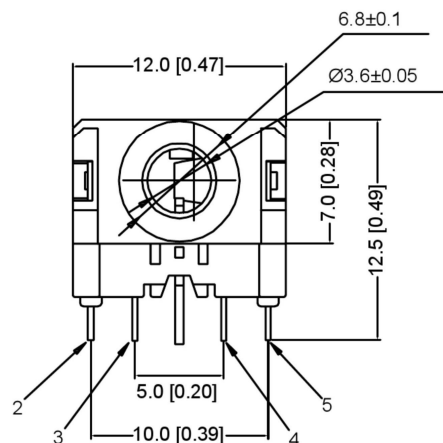

DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-305-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0