
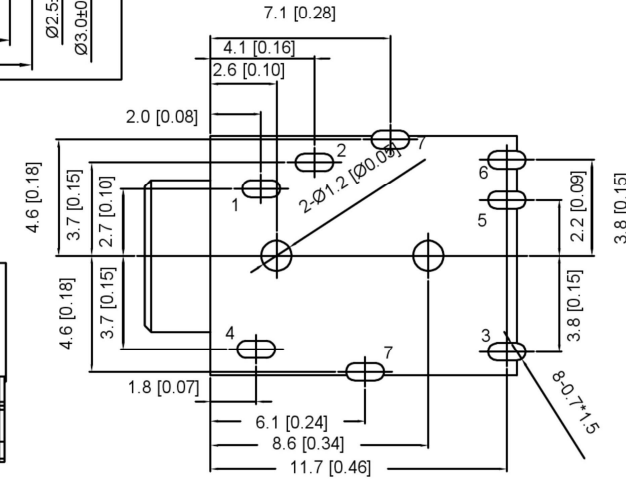
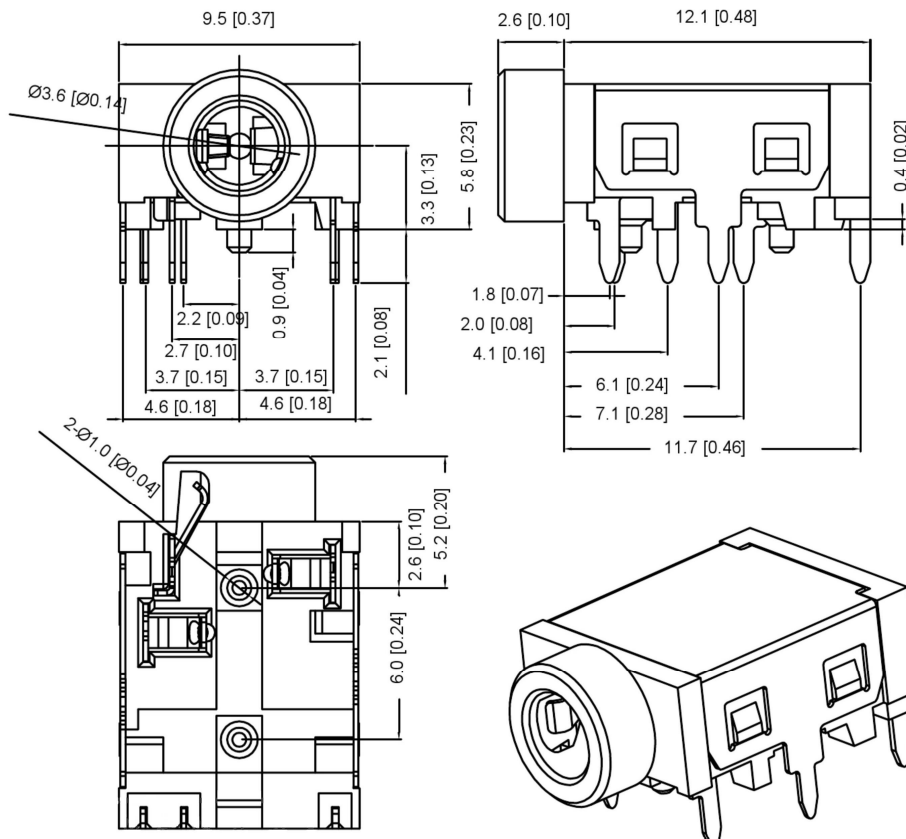
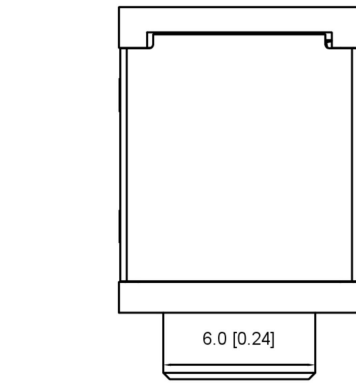


SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles。

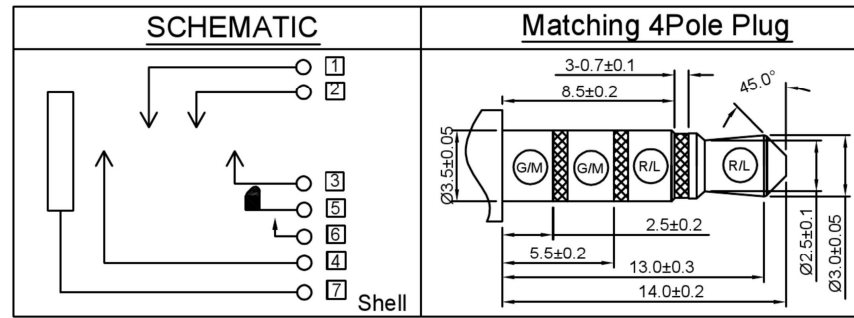

P.C.B LAYOUT TOP VIEW

9	HOUSING	1	PA9T	Black
8	INSULATOR	1	PA9T	Black
7	SHELL	1	SUS301 T=0.20mm	NI-Plating
6	TERMINAL-6	1	COPPER ALLOY T=0.20mm	GOLD FLASH ALL. OVER Ni40U"
5	TERMINAL-5	1	COPPER ALLOY T=0.20mm	
4	TERMINAL-4	1	COPPER ALLOY T=0.20mm	
3	TERMINAL-3	1	COPPER ALLOY T=0.25mm	
2	TERMINAL-2	1	COPPER ALLOY T=0.20mm	
1	TERMINAL-1	1	COPPER ALLOY T=0.20mm	PLATING
NO.	DESCRIPTION	QTY	MATERIAL	

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.: PJ-3401
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	
				L > 63	±0.5					
				UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			
REVISIONS				DATE	REVISED	APPROVED	WEIGHT	SHEET	REVISION	
www.alpsr.com www.gdxjdz.com www.xbswitch.com								1/1	A0	