
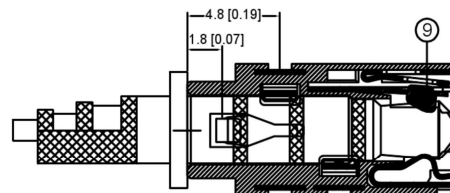
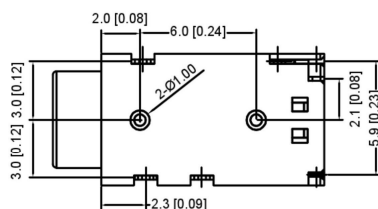





RECOMMENDED PCB LAYOUT



接触点示意图

NOTES:

1.ELECTRICAL CHARCTERISTICS:

- 1.1 RATED VOLTAGE: 5 VDC
- 1.2 RATED CURRENT: 0.5A MAX PER CONTACT
- 1.3 CONTACT RESISTANCE: 70 MILLIOHMS MAX.
- 1.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN
- 1.5 DIELECTIC WITHSTANDING VOLTAGE: 500V AC AT SEA LEVEL


2.MECHANICAL CHARACTERISTICS:

- 2.1 INSERTION FORCE: 20N MAX.(INITIAL)
20N MAX.(AFTER 5000 CYCLES DURABILITY TEST)
- 2.2 WITHDRWAL FORCE: 12 ±5N (INITIAL)
9 ±5N(AFTER 5000 CYCLES DURABILITY TEST)
- 2.3 DURABILITY:5000 CYCLES

3.ENVIRONMENTAL CHARACTERISTICS:

- 3.1 OPERATING TEMPERATURE: -30° TO +85°
- 3.2 STORAGE TEMPERATURE: -40° TO +85°

4.PACKAGE: TAPE REL

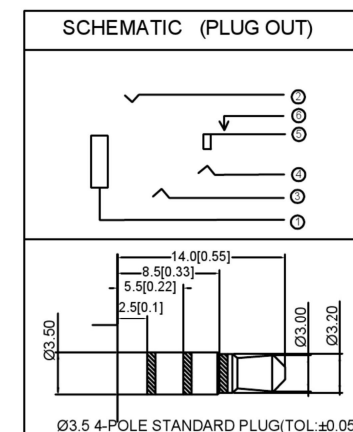

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-3701
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISION
			1/1
			A0

				ANGULAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
REVISIONS					
www.alpsr.com www.gdxjdz.com www.xbswitch.com					

