

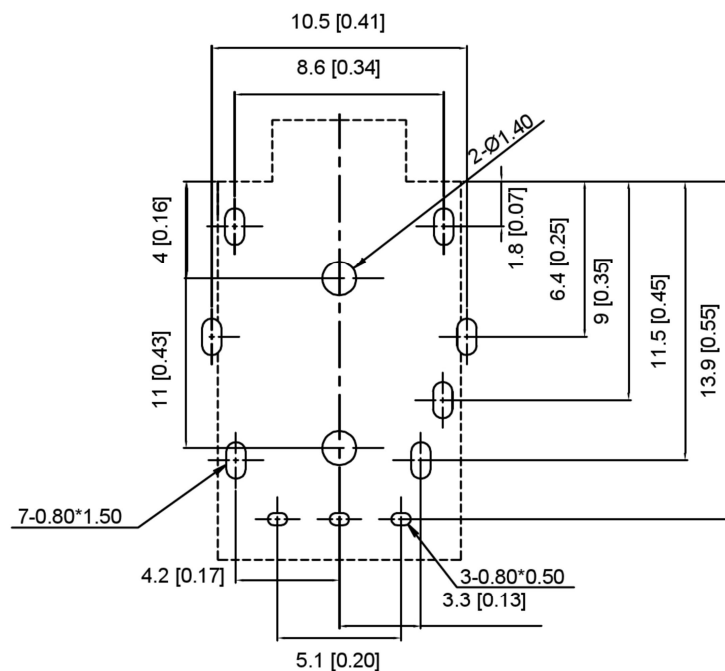
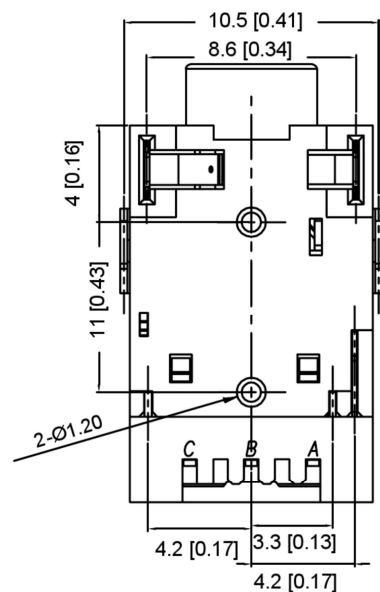
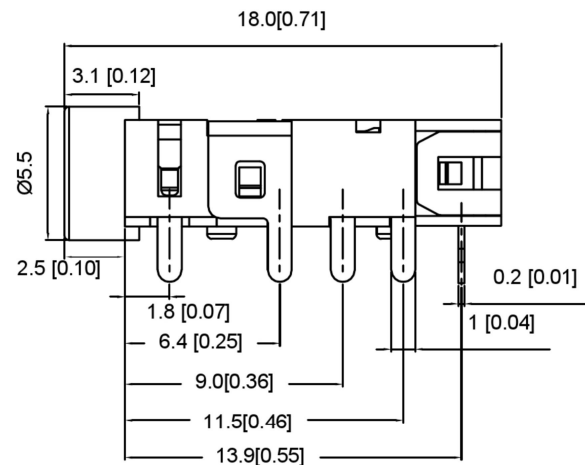



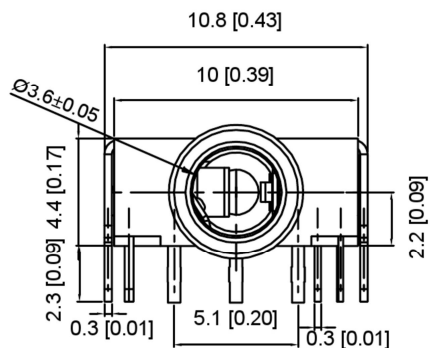


PCB LAYOUT BOTTOM VIEW
TOLERANCES:±0.05

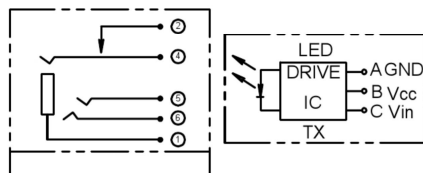

SPECIFICATIONS: ELECTRICAL CHARACTERISTICS:

- 1-1.RATING:20V , 1A Min.
- 1-2.CONTACT RESISTANCE
50 MILLIOHMS Max. FOR INITIAL
80 MILLIOHMS MEX AFTER 5000 CYCLES
- 1-3.INSULATION RESISTANCE:100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.
- 1-4 DIELECTRIC WITHSTANDING VOLTAGE500V
RMS AFTER 1 MINUTE
- 2.MECHANICAL CHARACTERISTICS:
- 2-1.INSERTION FORCE:0.3~3.0 KGF(2.94~29.4N)
- 2-2. WITHDRAWAL FORCE:0.3~3.0KGF(2.94~29.4N)
3. LIFE TEST:5.000 CYCLES MIN.

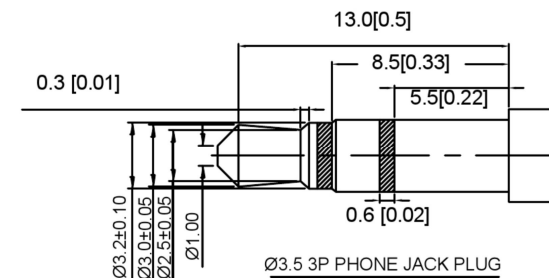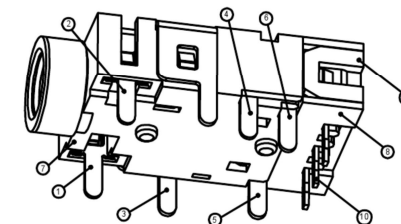

⑩	DRIVE IC TX	1	N/A	N/A
⑨	COVER2	1	HICH TEMP. THERMOPLASTIC	Black
⑧	COVER1	1	HICH TEMP. THERMOPLASTIC	Black
⑦	HOUSING	1	HICH TEMP. THERMOPLASTIC	Black
⑥	TERMINAL 6#	1	COPPER ALLOY t=0, 25	Au-Plated
⑤	TERMINAL 5#	1	COPPER ALLOY t=0, 30	Au-Plated
④	TERMINAL 4#	1	COPPER ALLOY t=0, 20	Au-Plated
③	TERMINAL 3#	1	COPPER ALLOY t=0, 20	Au-Plated
②	TERMINAL 2#	1	COPPER ALLOY t=0, 20	Au-Plated
①	TERMINAL 1#	1	COPPER ALLOY t=0, 20	Au-Plated
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-397D
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0