

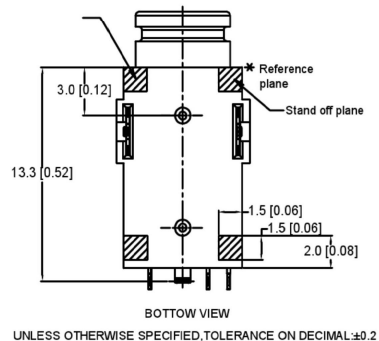

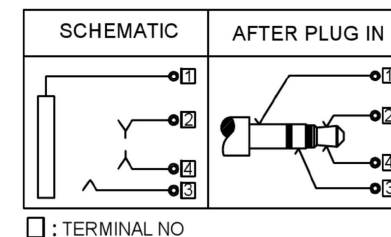
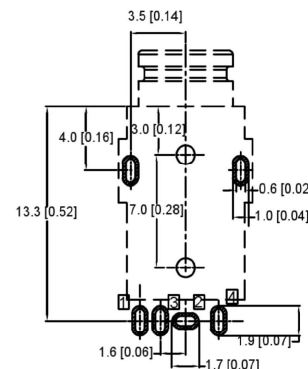
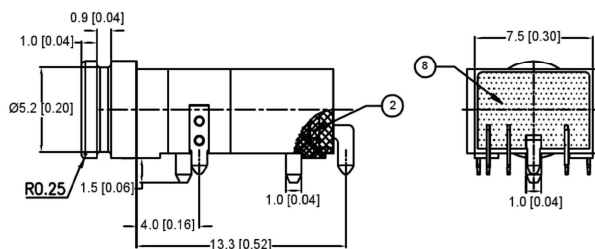



- SPECIFICATIONS:
1. RATING: 12V, 1A.
 2. CONTACT RESISTANCE: 30mA OR LESS FOR INITIAL
 3. VOLTAGE PROOF: 500V AC FOR ONE MINUTE
 4. DURABILITY: 5,000 INSERTION/EXTRACTION CYCLES
 5. INSERTION FORCE: 3.0KG MAX
 6. WITHDRAWAL FORCE: 0.3KG MIN
 7. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7 (1m, 30min)
 8. USING PLUG: 43.5MM, 3-POLE STEREO
 9. OVAL RING
 - 9-1. Hardness of silicone rubber: 70°
 - 9-2. Horizontal flash 0.10mm max; Longitudinal flash 0.10mm max
 10. HOUSING WITH O-RINGS SEAL AREA BURRS IS 0.05mm MAX
 11. FOR REFLOW SOLDERING LEAD-FREE PROCESS
 12. PACKAGING: TAPE & REEL.

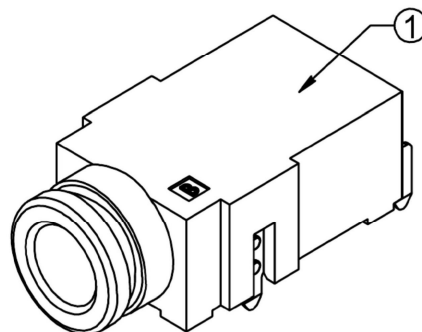

Recommended PCB Layout (T=1.2)
Tolerance: ±0.05 (TOP VIEW)

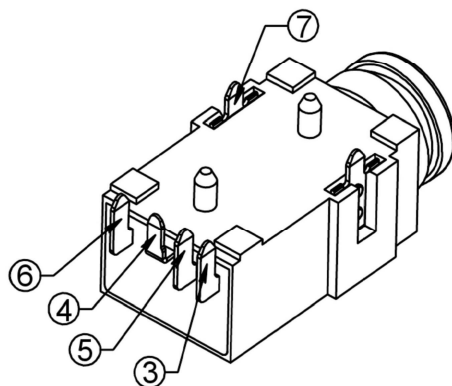

9	OVAL RING	----	1	SILICONE	GREEN
8	BOND	----	1	EPOXY	----
7	TERMINAL	----	2	C2680R-H T=0.2	Matte Sn 80u"Min; Ni 40u"Min underplate
6	TIP SPRING-2	4	1	C5210R-EH T=0.2	
5	RING SPRING	3	1	C5210R-EH T=0.2	
4	TIP SPRING-1	2	1	C5210R-EH T=0.2	
3	EARTH SPRING	1	1	C5210R-EH T=0.2	UL 94V-0
2	COVER	----	1	PA9T+33%GF(GN2330)	
1	HOUSING	----	1	PA9T+33%GF(GN2330)	UL 94V-0
ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK			
							DWN		VIEW: 	PART NO.: PJ-32434			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
REVISIONS						UNSPECIFIED TOLERANCES			WEIGHT			SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						1/1	A0