
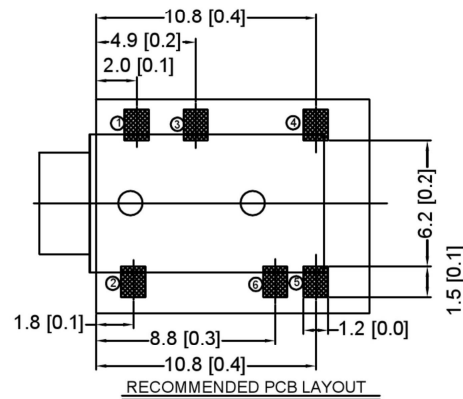
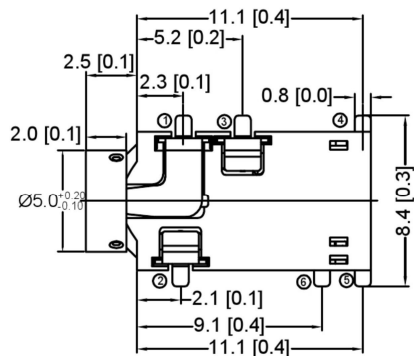


接触点示意图



NOTES:

1.ELECTRICAL CHARCTERISTICS:

1.1 RATED VOLTAGE: 5 VDC

1.2 RATED CURRENT: 0.5A MAX PER CONTACT AT 30 ° T-RISE

1.3 CONTACT RESISTANCE: 70 MILLIOHMS MAX.

1.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN

1.5 DIELECTIC WITHSTANDING VOLTAGE: 500V AC AT SEA LEVEL

2.MECHANICAL CHARACTERISTICS:

2.1 INSERTION FORCE: 20N MAX.(INITIAL)

20N MAX.(AFTER 5000 CYCLES DURABILITY TEST)

2.2 WITHDRWAL FORCE: 12 ±5N (INITIAL)

9 ± 5N(AFTER 5000 CYCLES DURABILITY TEST)


2.3 DURABILITY:5000 CYCLES

3.ENVIRONMENTAL CHARACTERISTICS:

3.1 OPERATING TEMPERATURE: -30 ° TO +85 °

3.2 STORAGE TEMPERATURE: -40 ° TO +85 °

4.PACKAGE: TAPE REEL

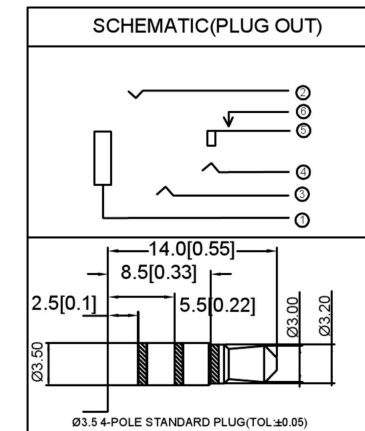

		MATERIAL	PLATING
10	RING	BRASS	
9	INSERT MOLDING	1 PA9T	BLACK
8	HOUSING	1 PA9T	BLACK
7	7# CONTACT FOOT	1 STAINLESS STEEL PLATE	
6	6# CONTACT FOOT	1 COPPER ALLOY	Au-Plating
5	5# CONTACT FOOT	1 COPPER ALLOY	Au-Plating
4	4# CONTACT FOOT	1 COPPER ALLOY	Au-Plating
3	3# CONTACT FOOT	1 COPPER ALLOY	Au-Plating
2	2# CONTACT FOOT	1 COPPER ALLOY	Au-Plating
1	1# CONTACT FOOT	1 COPPER ALLOY	Au-Plating

				ANGULAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-3701-SMT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISION
			1/1
			A0