
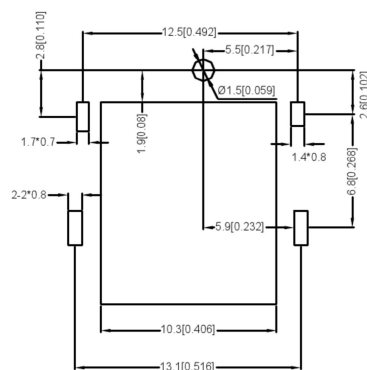


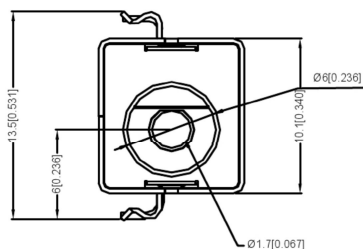




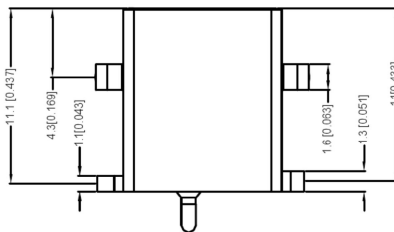

P.C.B LAYOUT TOP VIEW

SPECIFICATION

规格

Rating: DC 20V 5.5A

额定值: 直流20V 5.5A

Contact resistance: $\leq 0.03\Omega$

接触电阻: $\leq 0.03\Omega$

Insulation resistance: $\geq 100M\Omega$

绝缘电阻: $\geq 100M\Omega$

Withstand voltage: AC500V(50Hz)/min

耐受电压: AC500V (50Hz) /min

Insertion and extraction: 3-20N

插入和提取: 3-20N

Use temperature range: -30-70 °C

使用温度范围: -30-70 °C

Life test :5000 cycles

寿命试验: 5000次循环

SCHEMATIC	
Model	DC-C300-5.5A
Center Pin	Ø1.65 mm
	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
center pin	Brass	tin
coat	Brass	
cover palte	Sus	
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Ppa	

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
DWN		VIEW: 	PART NO.: DC-C300-5.5A-1.65		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0