


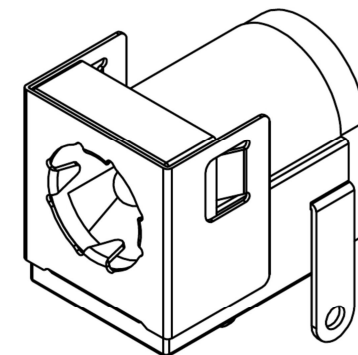

Schematic	
Model	DC-005F-2.5A
Center Pin	Ø2.0 mm
	Ø2.5 mm

1. Rated load: 30V 2.5A
2. Contact Resistance: $\leq 0.03\Omega$;
3. Insulation Resistance: $\geq 100M\Omega$;
4. Voltage withstand: AC500V(50Hz)/min;
5. Insertion force: 3~20N;
6. life: 5,000次。

	MATERIAL	PLATING
center pin	Brass	CuSn
terminal 1	Brass	Ag
terminal 2	Phosphor copper	Ag
terminal 3	Brass	Ag
plastic	Pbt	

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
				L≤ 4	±0.2		DWN		VIEW: 	PART NO.: DC-005F-2.5A-2.0		
				4<L≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16<L≤ 63	±0.4		APPD		SIZE: A4			
				L> 63	±0.5							
				UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
REVISIONS											1/1	A0
www.alpsr.com www.gdxjdz.com www.xbswitch.com												